

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P936351

Luminaire Tested: SQ4-FB-025U-075D-930-1D-UNV-STD-W-6

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P936351
REPORT IS A COMBINATION OF REPORTS P933446 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-025U-075D-930-1D-UNV-STD-W-6
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4063.9 lumens
Efficiency: N/A
Efficacy: 90.3 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 6' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 45
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P936351
CATALOG NUMBER: SQ4-FB-025U-075D-930-1D-UNV-STD-W-6

Luminous Intensity Polar Plot

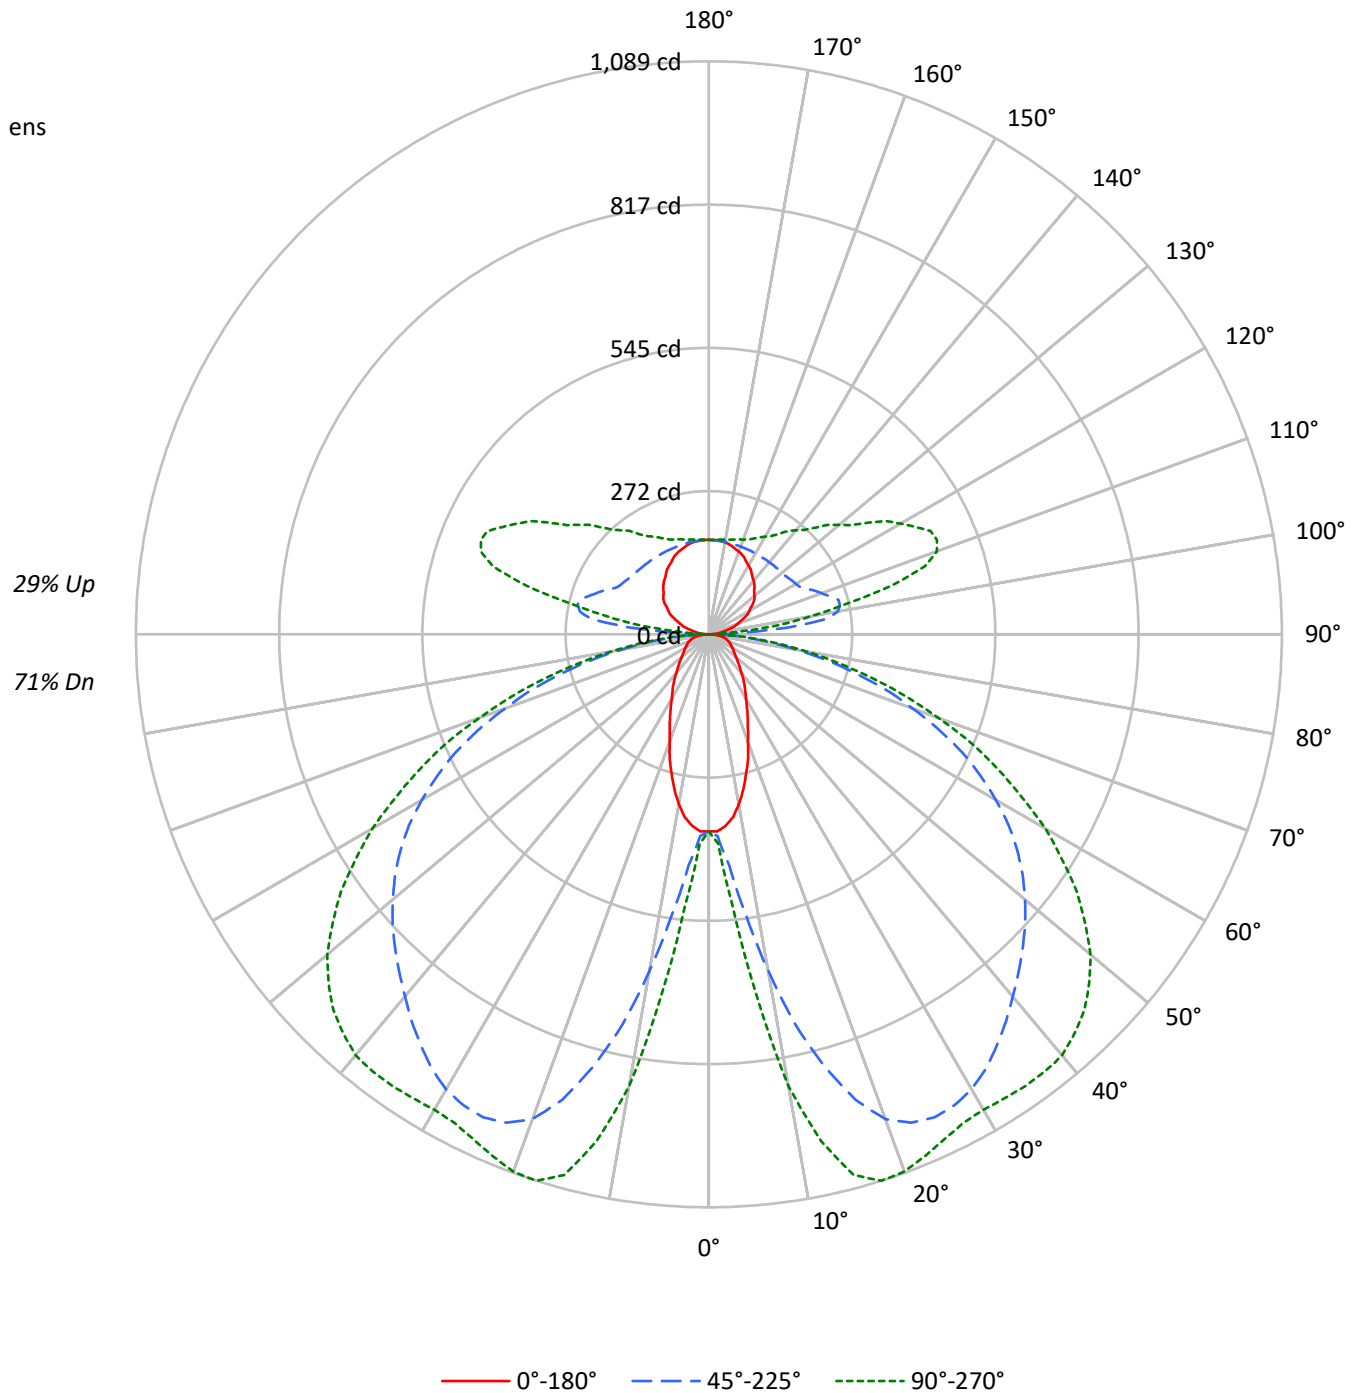



TEST NUMBER: P936351

CATALOG NUMBER: SQ4-FB-025U-075D-930-1D-UNV-STD-W-6

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	112	112	112	112	106	106	106	106	95	95	95	85	85	85	76	76	76	76	76	76	71
1	102	97	93	89	96	92	88	85	82	79	77	74	71	69	66	64	62	62	62	62	58
2	92	84	77	71	87	79	73	68	71	66	62	64	60	57	57	54	51	51	51	51	48
3	83	73	65	58	79	69	62	56	62	56	51	56	51	47	50	46	43	43	43	43	39
4	76	64	55	49	71	61	53	47	55	48	43	49	44	39	44	40	36	36	36	36	33
5	69	57	48	41	65	54	46	40	49	42	37	44	38	34	39	34	31	31	31	31	28
6	64	51	42	35	60	48	40	34	43	37	32	39	33	29	35	30	27	27	27	27	24
7	59	45	37	31	55	43	35	30	39	32	27	35	30	25	32	27	23	23	23	23	21
8	54	41	33	27	51	39	31	26	36	29	24	32	26	22	29	24	21	21	21	21	18
9	51	37	29	24	48	36	28	23	32	26	21	29	24	20	26	22	18	18	18	18	16
10	47	34	26	21	45	33	25	21	30	23	19	27	22	18	24	20	16	16	16	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2317	2317	2317
5°	2263	2677	3115
10°	2052	3902	5164
15°	1743	5097	6236
20°	1419	5905	6355
25°	1183	6179	6226
30°	997	6216	6215
35°	881	6111	6375
40°	768	5975	6541
45°	694	5875	6567
50°	637	5784	6458
55°	609	5653	6171
60°	623	5403	5720
65°	647	5022	5099
70°	687	4376	4307
75°	758	3566	3361
80°	823	2469	2265
85°	715	1309	1159

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 6567 cd/sqm



TEST NUMBER: P936351

CATALOG NUMBER: SQ4-FB-025U-075D-930-1D-UNV-STD-W-6

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	48.5	1.2
10°-20°	214.8	5.3
20°-30°	375.7	9.2
30°-40°	483.6	11.9
40°-50°	540.1	13.3
50°-60°	517.3	12.7
60°-70°	410.0	10.1
70°-80°	241.1	5.9
80°-90°	67.7	1.7
90°-100°	87.6	2.2
100°-110°	230.4	5.7
110°-120°	238.9	5.9
120°-130°	191.6	4.7
130°-140°	150.3	3.7
140°-150°	115.4	2.8
150°-160°	83.1	2.0
160°-170°	50.8	1.3
170°-180°	17.2	0.4
0°-30°	638.9	15.7
0°-40°	1122.5	27.6
0°-60°	2180.0	53.6
0°-90°	2898.7	71.3
90°-120°	556.8	13.7
90°-150°	1014.1	25.0
90°-180°	1165.0	28.7
0°-180°	4063.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	375	375	375	375	375	
5°	365	392	441	499	517	34
15°	273	505	850	1031	1064	76
25°	175	572	1013	1058	1059	80
35°	118	547	954	1008	1048	74
45°	81	436	843	966	1010	62
55°	58	277	716	831	854	53
65°	46	147	531	597	606	45
75°	34	90	292	320	322	35
85°	12	28	72	80	81	13
90°	1	3	9	5	5	2
95°	12	45	151	78	53	13
105°	42	63	255	387	361	44
115°	74	90	204	407	464	73
125°	102	115	186	314	370	91
135°	122	134	180	253	287	95
145°	142	151	178	216	233	89
155°	160	165	178	195	200	74
165°	173	175	178	184	187	49
175°	180	180	179	181	181	17
180°	180	180	180	180	180	



TEST NUMBER: P936351

CATALOG NUMBER: SQ4-FB-025U-075D-930-1D-UNV-STD-W-6

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	374.6	374.6	374.6	374.6	374.6	374.6	374.6	374.6	374.6	374.6	374.6
2.5°	374.6	374.6	377.0	378.2	380.6	381.8	384.2	386.6	393.9	395.1	397.5
5°	365.0	369.8	385.4	391.5	408.3	431.2	440.8	456.5	489.0	498.7	504.7
7.5°	350.5	361.4	399.9	409.5	451.7	511.9	537.2	570.9	622.7	648.0	668.5
10°	327.6	350.5	419.2	442.1	510.7	602.2	649.2	696.2	774.5	809.4	822.7
12.5°	302.3	339.7	439.6	471.0	569.7	703.4	760.0	811.8	901.0	948.0	955.2
15°	273.4	324.0	458.9	504.7	632.4	787.7	850.4	914.3	997.4	1031.1	1039.6
17.5°	248.1	312.0	477.0	525.2	680.5	863.6	927.5	980.5	1048.0	1070.9	1076.9
20°	216.8	292.7	489.0	551.7	731.1	919.1	980.5	1021.5	1067.3	1081.7	1084.1
22.5°	193.9	272.2	496.3	561.3	764.9	952.8	1004.6	1037.2	1068.5	1073.3	1074.5
25°	174.7	249.3	495.0	572.1	793.8	973.3	1013.1	1037.2	1055.2	1057.6	1057.6
27.5°	156.6	224.0	490.2	574.5	815.4	978.1	1009.5	1026.3	1034.7	1039.6	1039.6
30°	140.9	199.9	478.2	569.7	825.1	973.3	998.6	1007.0	1015.5	1022.7	1026.3
32.5°	128.9	177.1	460.1	560.1	826.3	961.3	979.3	984.2	996.2	1013.1	1019.1
35°	118.0	154.2	439.6	546.8	819.1	942.0	954.0	958.9	983.0	1008.2	1016.7
37.5°	107.2	137.3	413.1	524.0	808.2	919.1	927.5	936.0	973.3	1003.4	1013.1
40°	96.4	122.9	381.8	498.7	791.4	891.3	898.6	911.8	961.3	996.2	1005.8
42.5°	87.9	110.8	348.1	472.2	769.7	860.0	870.9	890.1	946.8	984.2	995.0
45°	80.7	98.8	312.0	436.0	742.0	827.5	843.2	869.6	930.0	966.1	975.7
47.5°	73.5	90.3	274.6	398.7	711.9	795.0	815.4	845.6	907.0	942.0	950.4
50°	67.5	81.9	237.3	358.9	679.3	760.0	784.1	815.4	878.1	910.6	921.5
52.5°	62.6	74.7	202.4	319.2	642.0	723.9	751.6	784.1	843.2	874.5	881.7
55°	57.8	68.7	172.2	277.0	603.5	685.4	715.5	746.8	804.6	831.1	835.9
57.5°	55.4	63.8	146.9	237.3	562.5	642.0	675.7	704.6	758.8	779.3	784.1
60°	51.8	60.2	127.7	203.6	517.9	601.0	630.0	658.9	704.6	721.5	725.1
62.5°	48.2	57.8	113.2	171.0	472.2	552.9	581.8	608.3	646.8	658.9	663.7
65°	45.8	55.4	102.4	146.9	425.2	502.3	531.2	554.1	585.4	597.4	599.8
67.5°	43.4	53.0	94.0	126.5	378.2	451.7	473.4	495.0	519.1	531.2	532.4
70°	39.7	50.6	86.7	112.0	330.0	393.9	411.9	434.8	454.1	460.1	463.7
72.5°	37.3	47.0	81.9	101.2	280.6	338.5	355.3	368.6	385.4	391.5	391.5
75°	33.7	42.2	77.1	90.3	230.1	277.0	291.5	304.7	318.0	320.4	316.8
77.5°	30.1	37.3	66.2	75.9	179.5	219.2	231.3	238.5	249.3	251.7	252.9
80°	25.3	32.5	51.8	59.0	130.1	161.4	169.8	175.9	185.5	185.5	187.9
82.5°	19.3	25.3	37.3	42.2	87.9	110.8	118.0	121.7	127.7	127.7	127.7
85°	12.0	15.7	24.1	27.7	53.0	67.5	72.3	73.5	78.3	79.5	79.5
87.5°	6.0	8.4	15.7	16.9	27.7	34.9	34.9	37.3	37.3	36.1	34.9
90°	1.2	2.2	3.1	3.4	5.3	7.9	9.2	8.1	6.1	4.6	4.6
92.5°	4.8	13.0	21.2	23.3	32.8	45.4	51.6	45.2	32.4	22.9	22.0
95°	11.6	26.6	41.6	45.4	80.5	127.4	150.9	134.7	102.1	77.8	75.1
97.5°	20.0	33.2	46.5	49.8	108.5	186.7	225.8	215.5	195.0	179.6	174.4
100°	26.6	38.5	50.6	53.6	118.7	205.5	248.8	249.6	251.1	252.2	246.0
102.5°	32.1	43.4	54.5	57.3	123.3	211.3	255.4	268.4	294.6	314.3	308.9
105°	41.5	51.0	60.5	62.9	126.8	212.0	254.6	283.9	342.6	386.6	383.8
107.5°	51.2	60.0	68.8	71.1	127.4	202.6	240.2	281.1	363.0	424.3	425.0
110°	57.7	65.7	73.6	75.6	126.5	194.2	228.1	273.9	365.4	433.9	436.9



TEST NUMBER: P936351

CATALOG NUMBER: SQ4-FB-025U-075D-930-1D-UNV-STD-W-6

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	64.1	71.7	79.3	81.2	126.5	186.9	217.1	263.9	357.6	427.8	432.3
115°	73.7	80.8	87.8	89.5	127.7	178.5	204.0	249.1	339.3	406.9	413.3
117.5°	83.3	89.6	96.0	97.6	130.0	173.3	195.0	235.7	317.0	378.1	385.1
120°	88.8	94.8	100.8	102.3	132.0	171.6	191.4	228.5	302.9	358.7	365.6
122.5°	94.2	100.3	106.3	107.8	134.7	170.6	188.5	222.0	289.0	339.3	346.1
125°	102.5	108.1	113.6	115.0	138.5	169.9	185.6	214.0	270.9	313.6	319.8
127.5°	109.3	114.8	120.4	121.8	142.2	169.4	183.0	207.4	256.3	292.9	298.2
130°	112.9	118.9	124.9	126.4	144.9	169.7	182.0	203.8	247.2	279.8	284.7
132.5°	116.7	122.7	128.6	130.2	147.2	169.9	181.2	200.7	239.6	268.8	273.1
135°	122.2	127.7	133.1	134.5	149.6	169.8	179.8	196.1	228.7	253.1	256.9
137.5°	127.9	133.3	138.7	140.0	153.2	170.8	179.6	193.4	220.9	241.5	244.6
140°	132.6	137.6	142.5	143.8	155.5	171.0	178.7	190.6	214.4	232.2	235.1
142.5°	136.2	140.8	145.4	146.5	157.2	171.5	178.7	189.1	210.1	225.7	228.2
145°	141.7	145.7	149.8	150.8	159.7	171.5	177.5	186.0	203.1	215.9	217.8
147.5°	147.3	151.2	155.1	156.1	163.2	172.7	177.5	184.2	197.6	207.7	209.3
150°	150.9	154.4	158.0	158.9	165.1	173.4	177.5	183.2	194.5	203.0	204.3
152.5°	154.7	157.3	160.0	160.7	166.3	173.8	177.5	182.3	192.0	199.3	200.3
155°	160.2	162.2	164.2	164.7	169.0	174.7	177.5	181.3	189.0	194.8	195.5
157.5°	164.3	166.2	168.1	168.6	171.6	175.5	177.5	180.4	186.5	191.0	191.4
160°	167.1	168.6	170.1	170.5	172.8	175.9	177.5	180.0	185.2	189.0	189.3
162.5°	169.8	171.0	172.1	172.4	174.1	176.3	177.5	179.6	184.0	187.3	187.5
165°	172.9	173.8	174.9	175.1	175.9	177.0	177.5	179.0	182.1	184.4	184.7
167.5°	175.6	176.1	176.6	176.7	177.4	178.3	178.7	179.7	181.7	183.2	183.3
170°	177.5	177.9	178.4	178.5	178.6	178.7	178.7	179.7	181.7	183.2	183.2
172.5°	178.4	178.5	178.7	178.7	178.7	178.7	178.7	179.5	181.1	182.3	182.2
175°	179.8	179.8	179.8	179.8	179.4	178.9	178.7	179.1	180.2	181.0	181.0
177.5°	179.8	179.8	179.8	179.8	179.5	179.1	178.9	179.3	180.1	180.8	180.7
180°	179.8	179.8	179.8	179.8	179.8	179.8	179.8	179.8	179.8	179.8	179.8



TEST NUMBER: P936351

CATALOG NUMBER: SQ4-FB-025U-075D-930-1D-UNV-STD-W-6

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	374.6	374.6
2.5°	399.9	397.5
5°	514.3	516.7
7.5°	692.6	691.4
10°	861.2	872.1
12.5°	984.2	986.6
15°	1058.8	1063.7
17.5°	1087.7	1088.9
20°	1088.9	1086.5
22.5°	1075.7	1073.3
25°	1060.0	1058.8
27.5°	1045.6	1046.8
30°	1039.6	1043.2
32.5°	1039.6	1045.6
35°	1042.0	1048.0
37.5°	1040.8	1048.0
40°	1036.0	1044.4
42.5°	1022.7	1028.7
45°	1002.2	1009.5
47.5°	975.7	980.5
50°	942.0	946.8
52.5°	899.8	901.0
55°	849.2	854.0
57.5°	795.0	796.2
60°	734.7	738.4
62.5°	670.9	670.9
65°	603.5	605.9
67.5°	533.6	539.6
70°	462.5	463.7
72.5°	392.7	392.7
75°	320.4	321.6
77.5°	251.7	251.7
80°	186.7	187.9
82.5°	128.9	131.3
85°	80.7	80.7
87.5°	37.3	33.7
90°	4.6	4.6
92.5°	18.3	14.7
95°	64.0	53.0
97.5°	153.4	132.3
100°	221.0	195.9
102.5°	287.5	266.0
105°	372.3	360.7
107.5°	427.8	430.6
110°	449.0	461.0



TEST NUMBER: P936351

CATALOG NUMBER: SQ4-FB-025U-075D-930-1D-UNV-STD-W-6

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	450.8	469.3
115°	438.8	464.5
117.5°	413.5	441.9
120°	393.1	420.7
122.5°	373.2	400.4
125°	344.8	369.9
127.5°	319.4	340.5
130°	304.3	323.8
132.5°	290.6	308.1
135°	271.9	287.0
137.5°	257.0	269.2
140°	246.6	258.2
142.5°	238.1	248.0
145°	225.3	232.9
147.5°	215.5	221.7
150°	209.3	214.4
152.5°	204.0	207.9
155°	197.9	200.5
157.5°	193.2	195.0
160°	190.3	191.4
162.5°	188.5	189.4
165°	185.7	186.8
167.5°	183.8	184.2
170°	183.2	183.2
172.5°	181.8	181.5
175°	181.0	181.0
177.5°	180.2	179.8
180°	179.8	179.8



TEST NUMBER: P936351
 CATALOG NUMBER: SQ4-FB-025U-075D-930-1D-UNV-STD-W-6

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.66	6.81	6.40	7.58	8.51	18.83	19.98	19.57	20.75	21.68
	3H	6.39	7.43	7.14	8.21	9.16	20.68	21.72	21.44	22.50	23.46
	4H	6.70	7.68	7.47	8.47	9.44	21.34	22.32	22.11	23.11	24.08
	6H	6.96	7.87	7.75	8.67	9.65	21.78	22.69	22.56	23.48	24.47
	8H	7.04	7.91	7.84	8.73	9.71	21.90	22.77	22.70	23.59	24.57
	12H	7.07	7.90	7.87	8.71	9.72	21.98	22.81	22.78	23.62	24.63
4H	2H	12.90	13.89	13.68	14.67	15.64	19.13	20.12	19.91	20.91	21.88
	3H	14.50	15.32	15.29	16.15	17.13	21.20	22.03	21.99	22.85	23.84
	4H	14.60	15.36	15.41	16.18	17.19	21.98	22.73	22.78	23.55	24.57
	6H	14.63	15.29	15.45	16.13	17.15	22.53	23.19	23.35	24.03	25.05
	8H	14.62	15.23	15.44	16.07	17.10	22.70	23.31	23.52	24.15	25.18
	12H	14.59	15.14	15.43	16.00	17.04	22.80	23.36	23.65	24.22	25.26
8H	4H	16.07	16.68	16.90	17.53	18.56	22.06	22.68	22.89	23.52	24.55
	6H	16.33	16.84	17.18	17.72	18.75	22.70	23.21	23.56	24.10	25.13
	8H	16.35	16.80	17.21	17.68	18.73	22.92	23.38	23.79	24.26	25.31
	12H	16.33	16.73	17.20	17.60	18.71	23.08	23.48	23.95	24.35	25.45
12H	4H	16.23	16.78	17.07	17.64	18.68	22.03	22.58	22.88	23.45	24.49
	6H	16.59	17.04	17.45	17.92	18.97	22.69	23.14	23.55	24.02	25.07
	8H	16.67	17.07	17.54	17.94	19.05	22.93	23.33	23.80	24.20	25.31