

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: CORELITE

Report Number: P519658

Luminaire Tested: **SQ4-025U-0D-930-1D-UNV-STD-W-8**

Issue Date: 4/29/2021

Test Information

Test Method: LM-79-2019
Report Number: P519658
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-536-32)
Test Lab: INNOVATION CENTER
Issue Date: 4/29/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: CORELITE
Catalog Number: SQ4-025U-0D-930-1D-UNV-STD-W-8
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE
UPLIGHT 250 LUMENS PER FOOT
Light Source: 3000K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1537.3 lumens
Efficiency: N/A
Efficacy: 146.4 lumens/watt
N/A
Luminous Opening: Rectangular (W 0.29' x L: 8' x H: 0')
CIE Type: Indirect

Input Watts (W): 10.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P519658
CATALOG NUMBER: SQ4-025U-0D-930-1D-UNV-STD-W-8

Luminous Intensity Polar Plot

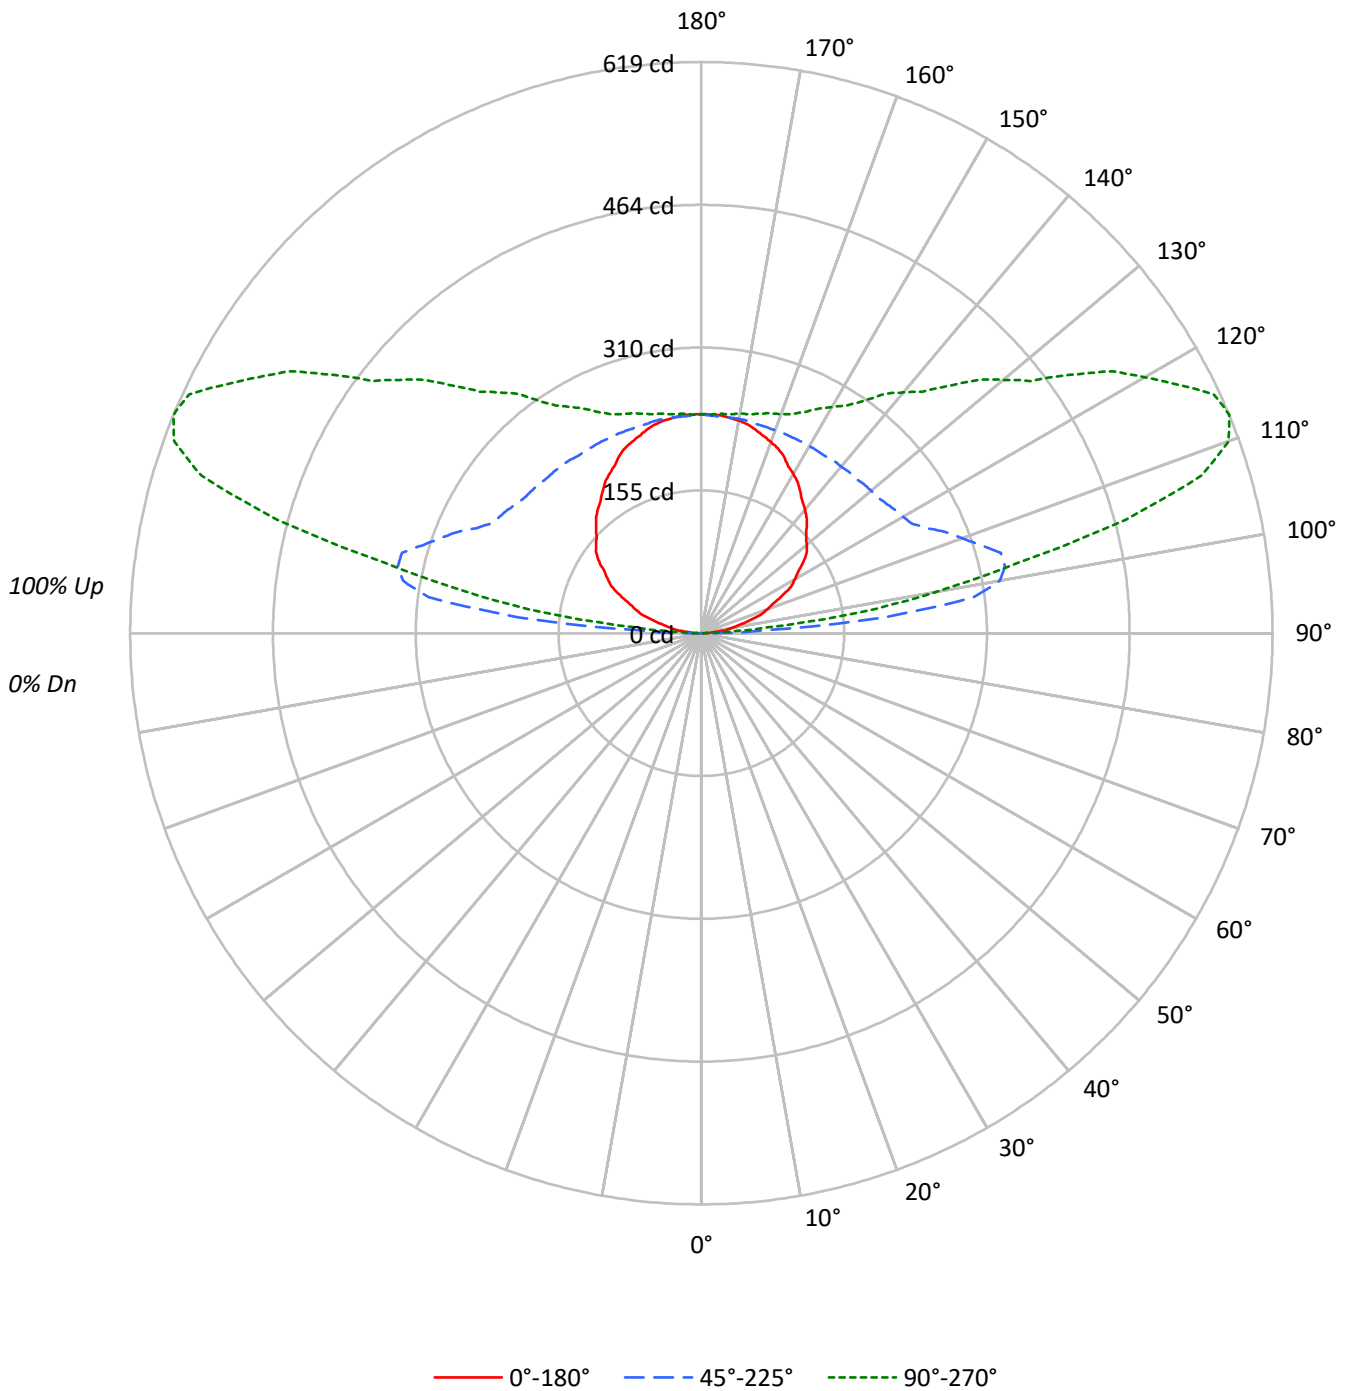



TEST NUMBER: P519658

CATALOG NUMBER: SQ4-025U-0D-930-1D-UNV-STD-W-8

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20								20				20				20	
RC	80								50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	95	95	95	95	81	81	81	81	56	56	56	32	32	32	10	10	10	0
1	87	83	79	76	74	71	68	65	48	47	45	28	27	26	9	9	8	0
2	79	72	66	62	67	62	57	53	42	40	37	24	23	22	8	7	7	0
3	72	63	57	51	61	54	49	44	37	34	31	21	20	18	7	6	6	0
4	65	56	48	43	56	48	42	37	33	29	26	19	17	16	6	6	5	0
5	60	49	42	36	51	42	36	32	29	25	22	17	15	13	5	5	4	0
6	55	44	36	31	47	38	32	27	26	22	19	15	13	11	5	4	4	0
7	50	39	32	27	43	34	28	23	23	19	17	14	11	10	4	4	3	0
8	47	35	28	23	40	30	24	20	21	17	14	12	10	9	4	3	3	0
9	43	32	25	20	37	27	22	18	19	15	13	11	9	8	4	3	3	0
10	40	29	22	18	34	25	19	16	17	14	11	10	8	7	3	3	2	0

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
95°	805	10544	3700
100°	930	8724	6867
105°	975	5989	8482
110°	1025	4060	8202
115°	1062	2937	6688
120°	1080	2329	5120
125°	1088	1969	3925
130°	1069	1724	3066
135°	1052	1547	2470
140°	1053	1419	2051
145°	1053	1318	1729
150°	1061	1247	1506
155°	1076	1192	1346
160°	1082	1149	1239
165°	1089	1118	1176
170°	1097	1104	1132
175°	1098	1091	1105



TEST NUMBER: P519658

CATALOG NUMBER: SQ4-025U-0D-930-1D-UNV-STD-W-8

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	0.0	0.0
10°-20°	0.0	0.0
20°-30°	0.0	0.0
30°-40°	0.0	0.0
40°-50°	0.0	0.0
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	115.6	7.5
100°-110°	303.9	19.8
110°-120°	315.1	20.5
120°-130°	252.8	16.4
130°-140°	198.3	12.9
140°-150°	152.2	9.9
150°-160°	109.6	7.1
160°-170°	67.1	4.4
170°-180°	22.7	1.5
0°-30°	0.0	0.0
0°-40°	0.0	0.0
0°-60°	0.0	0.0
0°-90°	0.0	0.0
90°-120°	734.6	47.8
90°-150°	1337.9	87.0
90°-180°	1537.0	100.0
0°-180°	1537.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
90°	2	4	12	6	6	
95°	15	60	199	103	70	18
105°	55	83	336	510	476	58
115°	97	118	269	537	613	96
125°	135	152	245	414	488	120
135°	161	178	237	334	379	125
145°	187	199	234	285	307	117
155°	211	217	234	257	264	97
165°	228	231	234	243	246	64
175°	237	237	236	239	239	23
180°	237	237	237	237	237	



TEST NUMBER: P519658

CATALOG NUMBER: SQ4-025U-0D-930-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
90°	1.5	4.5	12.2	6.1	6.1
92.5°	6.4	30.8	68.1	30.2	19.5
95°	15.2	59.8	199.2	102.6	69.9
97.5°	26.5	65.7	298.0	237.0	174.5
100°	35.0	70.6	328.4	332.8	258.5
102.5°	42.3	75.6	336.9	414.5	350.9
105°	54.7	83.0	336.0	510.1	475.9
107.5°	67.5	93.7	316.8	559.7	568.0
110°	76.0	99.8	301.0	572.5	608.1
112.5°	84.5	107.1	286.4	564.4	619.1
115°	97.3	118.1	269.1	536.9	612.7
117.5°	109.8	128.8	257.2	498.8	582.9
120°	117.1	134.9	252.4	473.2	554.9
122.5°	124.4	142.2	248.7	447.6	528.2
125°	135.3	151.7	244.8	413.7	488.0
127.5°	144.1	160.8	241.4	386.4	449.1
130°	149.0	166.8	240.2	369.2	427.2
132.5°	153.9	171.7	239.0	354.5	406.5
135°	161.2	177.5	237.2	334.0	378.6
137.5°	168.8	184.8	236.9	318.6	355.2
140°	174.8	189.7	235.7	306.4	340.6
142.5°	179.7	193.4	235.7	297.7	327.2
145°	187.0	198.9	234.1	284.8	307.1
147.5°	194.3	205.9	234.1	274.1	292.5
150°	199.2	209.6	234.1	267.9	282.8
152.5°	204.0	212.1	234.1	263.0	274.3
155°	211.3	217.3	234.1	257.1	264.5
157.5°	216.8	222.5	234.1	251.9	257.2
160°	220.5	224.9	234.1	249.4	252.4
162.5°	224.1	227.4	234.1	247.0	249.9
165°	228.1	231.0	234.1	243.3	246.3
167.5°	231.7	233.2	235.7	241.8	243.0
170°	234.1	235.6	235.7	241.7	241.7
172.5°	235.3	235.6	235.7	240.5	239.3
175°	237.2	237.2	235.7	238.7	238.7
177.5°	237.2	237.2	236.0	238.4	237.2
180°	237.2	237.2	237.2	237.2	237.2

(END OF REPORT)