

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: CORELITE

Report Number: P519730

Luminaire Tested: **SQ4-100U-0D-930-1D-UNV-STD-W-8**

Issue Date: 4/29/2021

Test Information

Test Method: LM-79-2019
Report Number: P519730
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-536-23)
Test Lab: INNOVATION CENTER
Issue Date: 4/29/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: CORELITE
Catalog Number: SQ4-100U-0D-930-1D-UNV-STD-W-8
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE
UPLIGHT 1000 LUMENS PER FOOT
Light Source: 3000K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6392.0 lumens
Efficiency: N/A
Efficacy: 129.1 lumens/watt
N/A
Luminous Opening: Rectangular (W 0.29' x L: 8' x H: 0')
CIE Type: Indirect

Input Watts (W): 49.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P519730
CATALOG NUMBER: SQ4-100U-0D-930-1D-UNV-STD-W-8

Luminous Intensity Polar Plot

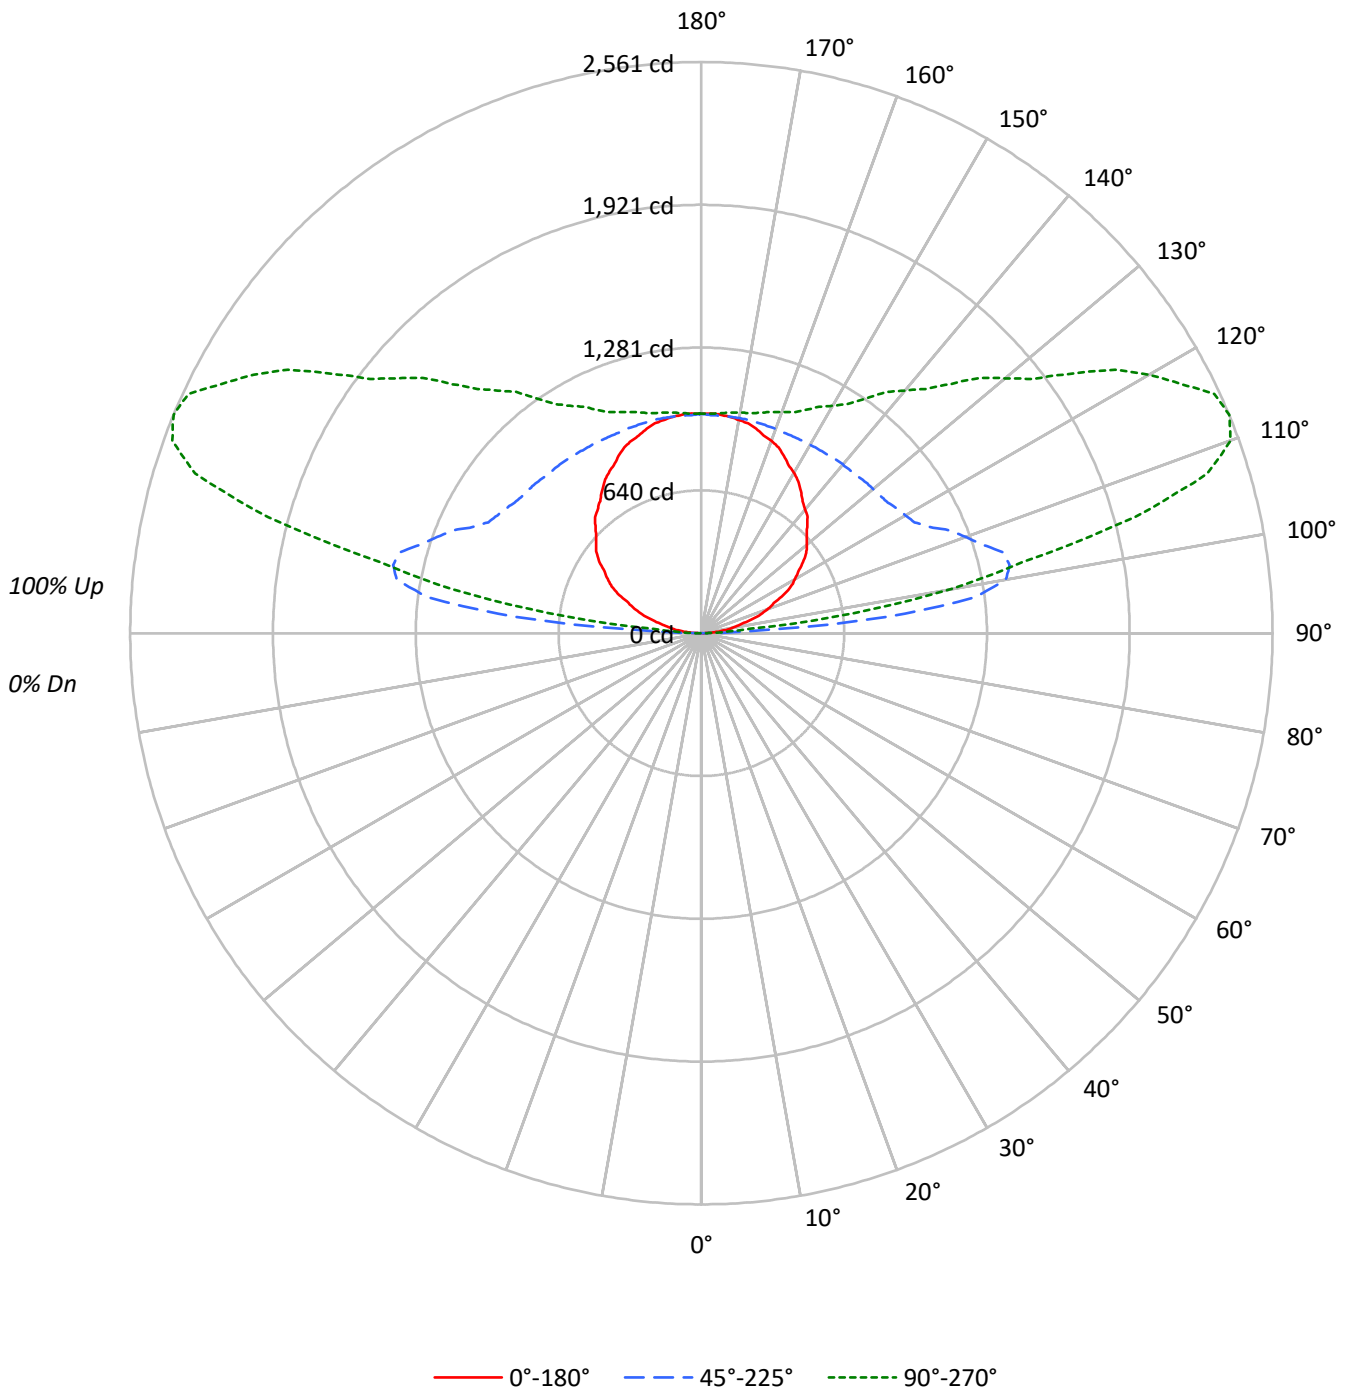



TEST NUMBER: P519730

CATALOG NUMBER: SQ4-100U-0D-930-1D-UNV-STD-W-8

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20								20				20				20				20
RC	80								50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10				0
RCR																					
0	95	95	95	95	81	81	81	81	56	56	56	32	32	32	10	10	10				0
1	87	83	79	76	74	71	68	65	48	47	45	28	27	26	9	9	8				0
2	79	72	66	62	67	62	57	53	42	40	37	24	23	22	8	7	7				0
3	72	63	57	51	61	54	49	44	37	34	31	21	20	18	7	6	6				0
4	65	56	48	43	56	48	42	37	33	29	26	19	17	16	6	6	5				0
5	60	49	42	36	51	42	36	32	29	25	22	17	15	13	5	5	4				0
6	55	44	36	31	47	38	32	27	26	22	19	15	13	11	5	4	4				0
7	50	39	32	27	43	34	28	23	23	19	17	14	11	10	4	4	3				0
8	47	35	28	23	40	30	24	20	21	17	14	12	10	9	4	3	3				0
9	43	32	25	20	37	27	22	18	19	15	13	11	9	8	4	3	3				0
10	40	29	22	18	34	25	19	16	17	14	11	10	8	7	3	3	2				0

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
95°	3583	44238	11830
100°	3847	36839	30150
105°	4041	24941	35854
110°	4289	17005	34053
115°	4433	12302	27696
120°	4473	9745	21377
125°	4481	8216	16318
130°	4428	7218	12754
135°	4374	6480	10300
140°	4361	5943	8550
145°	4379	5522	7224
150°	4427	5198	6272
155°	4462	4951	5616
160°	4505	4783	5177
165°	4533	4668	4886
170°	4549	4586	4704
175°	4556	4533	4585



TEST NUMBER: P519730

CATALOG NUMBER: SQ4-100U-0D-930-1D-UNV-STD-W-8

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	0.0	0.0
10°-20°	0.0	0.0
20°-30°	0.0	0.0
30°-40°	0.0	0.0
40°-50°	0.0	0.0
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	460.7	7.2
100°-110°	1271.9	19.9
110°-120°	1311.7	20.5
120°-130°	1054.1	16.5
130°-140°	828.4	13.0
140°-150°	635.3	9.9
150°-160°	456.6	7.1
160°-170°	279.2	4.4
170°-180°	94.1	1.5
0°-30°	0.0	0.0
0°-40°	0.0	0.0
0°-60°	0.0	0.0
0°-90°	0.0	0.0
90°-120°	3044.3	47.6
90°-150°	5562.0	87.0
90°-180°	6392.0	100.0
0°-180°	6392.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
90°	3	6	13	14	16	
95°	68	249	836	344	224	77
105°	227	350	1399	2136	2012	241
115°	406	491	1127	2231	2537	399
125°	557	634	1022	1729	2029	496
135°	670	743	993	1400	1579	519
145°	778	831	981	1192	1283	487
155°	877	906	973	1070	1103	404
165°	949	962	978	1015	1023	268
175°	984	985	979	993	990	93
180°	984	984	984	984	984	



TEST NUMBER: P519730

CATALOG NUMBER: SQ4-100U-0D-930-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
90°	3.1	6.2	12.6	14.2	15.7
92.5°	28.3	117.6	210.3	76.7	59.8
95°	67.7	249.3	835.8	343.6	223.5
97.5°	112.1	279.2	1238.1	953.2	690.4
100°	144.8	297.2	1386.7	1396.5	1134.9
102.5°	176.3	317.6	1415.7	1725.5	1477.4
105°	226.7	349.8	1399.3	2136.3	2011.6
107.5°	280.2	389.8	1321.2	2334.4	2379.9
110°	318.0	416.5	1260.8	2377.0	2524.7
112.5°	352.0	446.8	1204.1	2343.3	2561.3
115°	406.1	490.7	1127.0	2231.1	2537.3
117.5°	453.3	537.7	1076.3	2073.0	2421.5
120°	484.8	567.9	1056.2	1966.1	2317.0
122.5°	515.0	594.4	1039.8	1866.2	2198.6
125°	557.2	634.2	1021.5	1728.8	2028.9
127.5°	593.1	670.0	1010.8	1612.7	1871.5
130°	617.0	694.0	1005.8	1541.6	1777.1
132.5°	639.7	712.9	1000.8	1481.9	1695.2
135°	670.5	742.9	993.2	1400.2	1578.8
137.5°	705.2	771.0	989.4	1331.6	1484.0
140°	724.1	788.7	986.9	1285.9	1419.8
142.5°	745.5	805.2	984.4	1245.2	1363.1
145°	777.6	831.4	980.6	1192.0	1282.8
147.5°	808.4	855.5	977.2	1147.2	1217.7
150°	831.1	869.6	975.9	1120.4	1177.4
152.5°	848.7	884.7	974.6	1097.5	1144.6
155°	876.7	906.0	972.7	1069.5	1103.4
157.5°	902.5	925.0	973.1	1049.1	1072.2
160°	917.7	937.7	974.3	1037.7	1054.6
162.5°	930.3	947.8	975.6	1027.5	1040.7
165°	949.1	961.5	977.5	1015.4	1023.1
167.5°	963.6	971.0	979.0	1008.1	1010.5
170°	971.2	977.3	979.0	1004.2	1004.2
172.5°	977.5	981.2	979.0	999.2	997.9
175°	983.8	985.3	979.0	993.1	990.1
177.5°	986.3	985.1	978.7	987.5	985.0
180°	983.8	983.8	983.8	983.8	983.8

(END OF REPORT)