

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P937252

Luminaire Tested: SQ4-FB-075U-100D-930-1D-UNV-STD-W-8

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P937252
REPORT IS A COMBINATION OF REPORTS P933519 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-075U-100D-930-1D-UNV-STD-W-8
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 9917.1 lumens
Efficiency: N/A
Efficacy: 96.8 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 8' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 102.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P937252
CATALOG NUMBER: SQ4-FB-075U-100D-930-1D-UNV-STD-W-8

Luminous Intensity Polar Plot

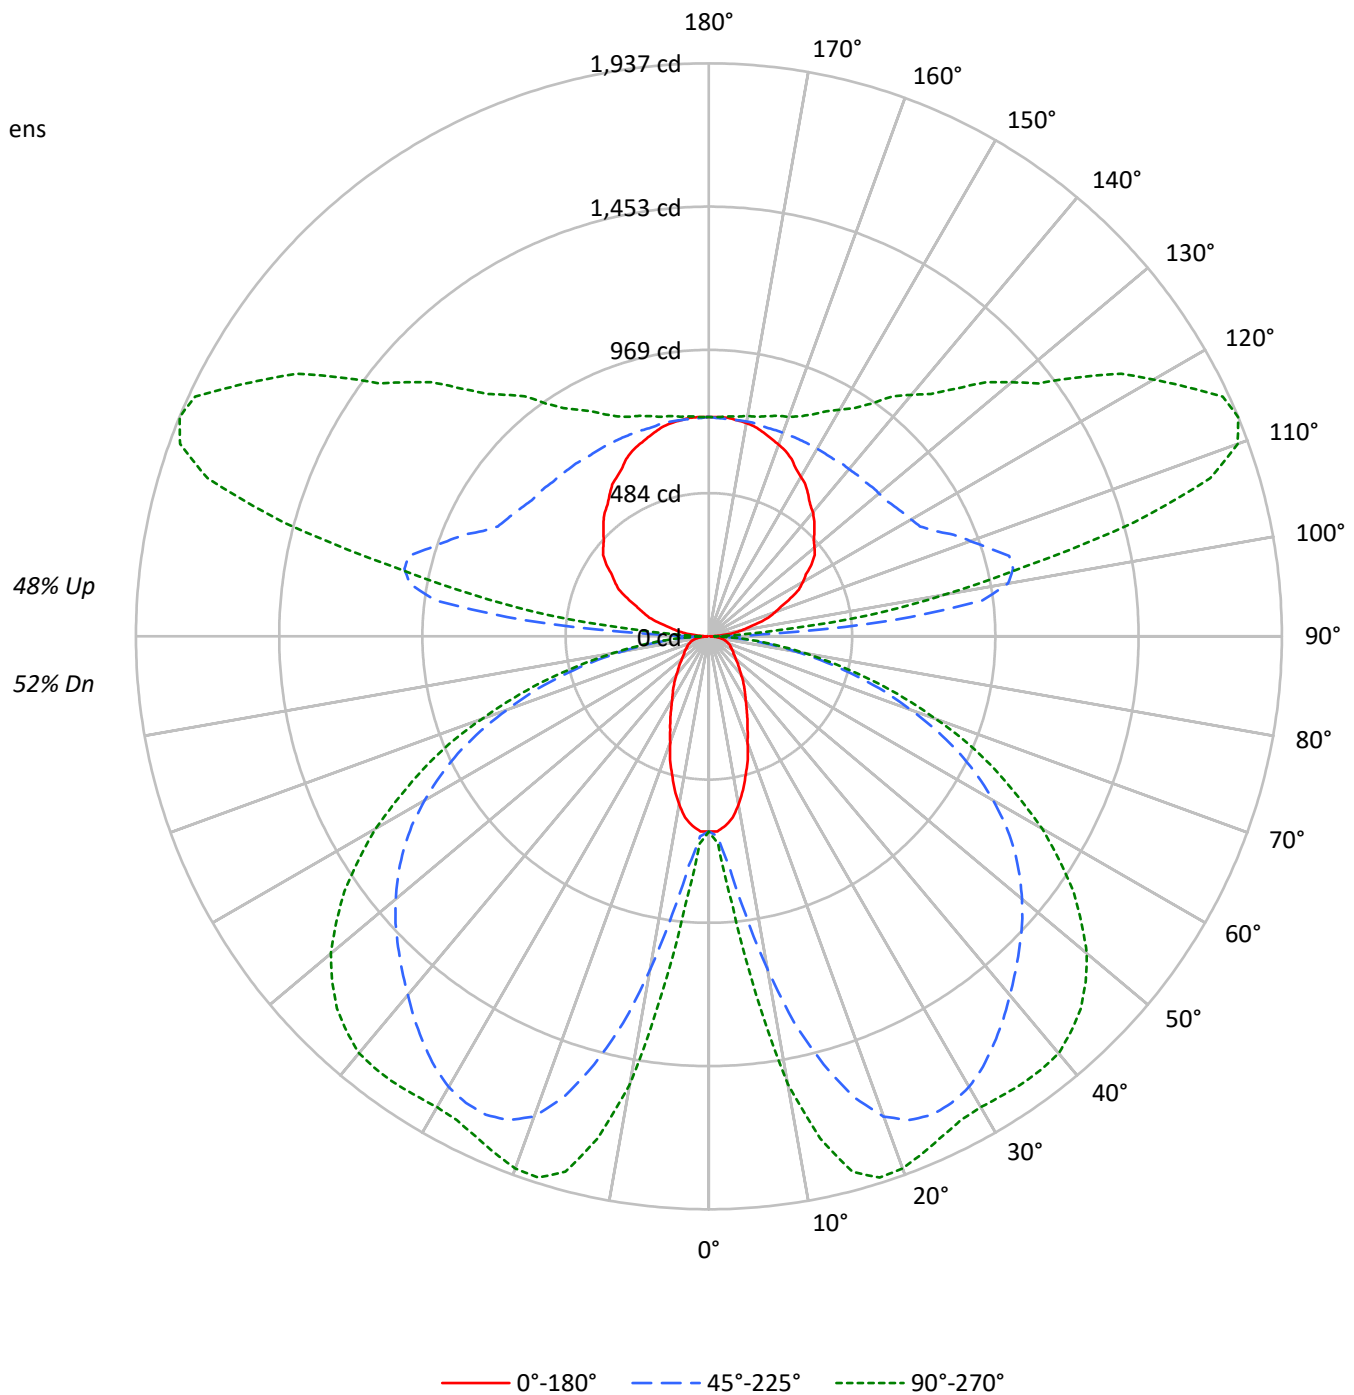



TEST NUMBER: P937252

CATALOG NUMBER: SQ4-FB-075U-100D-930-1D-UNV-STD-W-8

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	108	108	108	108	99	99	99	99	84	84	84	70	70	70	58	58	58	58	58	58	52
1	98	93	89	85	90	86	82	79	73	70	68	61	59	57	50	49	47	50	49	47	42
2	88	80	74	69	81	74	69	64	63	59	55	53	50	47	43	41	39	43	41	39	34
3	80	70	62	56	74	65	58	53	55	50	46	46	42	39	38	35	32	38	35	32	28
4	73	62	53	47	67	57	50	44	49	43	38	41	36	33	33	30	27	33	30	27	24
5	67	55	46	40	61	51	43	37	43	37	33	36	32	28	30	26	23	30	26	23	20
6	61	49	40	34	56	45	38	32	39	33	28	32	28	24	27	23	20	27	23	20	17
7	56	44	35	30	52	41	33	28	35	29	24	29	25	21	24	20	18	24	20	18	15
8	52	39	31	26	48	37	29	24	31	26	21	27	22	19	22	18	16	22	18	16	13
9	49	36	28	23	45	33	26	22	29	23	19	24	20	16	20	17	14	20	17	14	12
10	45	33	25	20	42	31	24	19	26	21	17	22	18	15	19	15	12	19	15	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3062	3062	3062
5°	2991	3539	4116
10°	2713	5159	6823
15°	2306	6740	8239
20°	1878	7810	8397
25°	1566	8173	8226
30°	1321	8225	8211
35°	1168	8088	8423
40°	1018	7910	8642
45°	922	7781	8676
50°	845	7664	8532
55°	809	7492	8155
60°	828	7163	7558
65°	862	6663	6737
70°	918	5811	5691
75°	1017	4738	4441
80°	1113	3286	2993
85°	987	1744	1532

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 8676 cd/sqm



TEST NUMBER: P937252

CATALOG NUMBER: SQ4-FB-075U-100D-930-1D-UNV-STD-W-8

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	85.4	0.9
10°-20°	378.4	3.8
20°-30°	661.8	6.7
30°-40°	851.9	8.6
40°-50°	951.6	9.6
50°-60°	911.4	9.2
60°-70°	722.3	7.3
70°-80°	424.7	4.3
80°-90°	120.8	1.2
90°-100°	361.6	3.6
100°-110°	950.6	9.6
110°-120°	985.7	9.9
120°-130°	790.7	8.0
130°-140°	620.4	6.3
140°-150°	476.2	4.8
150°-160°	342.9	3.5
160°-170°	209.8	2.1
170°-180°	70.9	0.7
0°-30°	1125.5	11.3
0°-40°	1977.5	19.9
0°-60°	3840.5	38.7
0°-90°	5108.3	51.5
90°-120°	2297.9	23.2
90°-150°	4185.1	42.2
90°-180°	4809.0	48.5
0°-180°	9917.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	660	660	660	660	660	
5°	643	690	777	879	910	59
15°	482	889	1498	1816	1874	134
25°	308	1008	1785	1863	1865	142
35°	208	963	1681	1776	1846	130
45°	142	768	1486	1702	1778	110
55°	102	488	1260	1464	1505	93
65°	81	259	936	1053	1067	80
75°	59	159	514	564	567	62
85°	21	49	127	140	142	23
90°	5	14	38	19	19	6
95°	48	187	623	321	219	53
105°	171	259	1051	1596	1488	182
115°	304	369	842	1679	1917	300
125°	423	474	766	1294	1526	376
135°	504	555	742	1044	1184	390
145°	585	622	732	891	961	366
155°	661	680	732	804	827	304
165°	713	723	732	761	771	201
175°	742	742	737	747	747	70
180°	742	742	742	742	742	



TEST NUMBER: P937252

CATALOG NUMBER: SQ4-FB-075U-100D-930-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	660.0	660.0	660.0	660.0	660.0	660.0	660.0	660.0	660.0	660.0	660.0
2.5°	660.0	660.0	664.2	666.3	670.6	672.7	676.9	681.2	694.0	696.0	700.3
5°	643.0	651.5	679.1	689.7	719.4	759.7	776.7	804.3	861.5	878.6	889.2
7.5°	617.5	636.6	704.6	721.5	795.8	901.8	946.4	1005.8	1097.1	1141.7	1177.8
10°	577.2	617.5	738.5	778.8	899.8	1061.0	1143.8	1226.6	1364.5	1426.0	1449.3
12.5°	532.6	598.4	774.6	829.7	1003.8	1239.3	1339.0	1430.3	1587.3	1670.1	1682.8
15°	481.7	570.9	808.5	889.2	1114.1	1387.8	1498.2	1610.7	1757.0	1816.5	1831.3
17.5°	437.2	549.7	840.3	925.2	1199.0	1521.5	1634.0	1727.3	1846.2	1886.5	1897.2
20°	382.0	515.7	861.5	971.9	1288.1	1619.2	1727.3	1799.5	1880.1	1905.6	1909.9
22.5°	341.7	479.6	874.3	988.9	1347.5	1678.6	1769.8	1827.1	1882.3	1890.7	1892.9
25°	307.7	439.2	872.1	1008.0	1398.4	1714.6	1784.7	1827.1	1858.9	1863.2	1863.2
27.5°	275.8	394.7	863.7	1012.3	1436.6	1723.2	1778.3	1808.0	1822.9	1831.3	1831.3
30°	248.3	352.3	842.4	1003.8	1453.6	1714.6	1759.2	1774.1	1788.9	1801.6	1808.0
32.5°	227.1	312.0	810.6	986.7	1455.8	1693.4	1725.2	1733.8	1755.0	1784.7	1795.3
35°	208.0	271.7	774.6	963.4	1443.0	1659.5	1680.7	1689.2	1731.6	1776.2	1791.0
37.5°	188.9	241.9	727.8	923.1	1423.9	1619.2	1634.0	1648.9	1714.6	1767.6	1784.7
40°	169.8	216.5	672.7	878.6	1394.2	1570.3	1583.0	1606.4	1693.4	1755.0	1771.9
42.5°	154.9	195.2	613.3	831.8	1356.0	1515.2	1534.3	1568.2	1667.9	1733.8	1752.9
45°	142.2	174.0	549.7	768.1	1307.2	1457.8	1485.5	1532.1	1638.2	1701.9	1718.9
47.5°	129.4	159.2	483.8	702.4	1254.1	1400.6	1436.6	1489.7	1597.9	1659.5	1674.3
50°	118.8	144.3	418.0	632.4	1196.9	1339.0	1381.5	1436.6	1547.0	1604.3	1623.3
52.5°	110.3	131.5	356.5	562.3	1131.0	1275.3	1324.1	1381.5	1485.5	1540.6	1553.3
55°	101.8	120.9	303.5	488.1	1063.2	1207.5	1260.5	1315.7	1417.5	1464.2	1472.7
57.5°	97.6	112.5	258.9	418.0	991.0	1131.0	1190.4	1241.4	1336.9	1373.0	1381.5
60°	91.2	106.1	224.9	358.6	912.5	1058.9	1109.8	1160.7	1241.4	1271.1	1277.5
62.5°	84.9	101.8	199.5	301.4	831.8	974.0	1024.9	1071.7	1139.5	1160.7	1169.2
65°	80.6	97.6	180.4	258.9	749.1	884.9	935.8	976.1	1031.3	1052.6	1056.8
67.5°	76.4	93.4	165.5	222.8	666.3	795.8	834.0	872.1	914.6	935.8	938.0
70°	70.0	89.1	152.8	197.4	581.5	694.0	725.8	766.1	800.0	810.6	817.0
72.5°	65.8	82.8	144.3	178.3	494.4	596.3	626.0	649.4	679.1	689.7	689.7
75°	59.4	74.3	135.8	159.2	405.4	488.1	513.5	536.9	560.3	564.5	558.1
77.5°	53.1	65.8	116.7	133.7	316.2	386.2	407.4	420.1	439.2	443.5	445.7
80°	44.6	57.3	91.2	104.0	229.2	284.3	299.2	309.8	326.8	326.8	331.1
82.5°	34.0	44.6	65.8	74.3	154.9	195.2	208.0	214.3	224.9	224.9	224.9
85°	21.2	27.6	42.5	48.8	93.4	118.8	127.4	129.4	138.0	140.0	140.0
87.5°	10.6	14.9	27.6	29.7	48.8	61.5	61.5	65.8	65.8	63.7	61.5
90°	5.0	9.0	13.0	14.0	21.9	32.5	37.8	33.6	25.2	19.0	19.0
92.5°	19.9	53.8	87.7	96.1	135.1	187.1	213.1	186.8	134.1	94.6	90.8
95°	47.8	109.8	171.7	187.2	332.4	526.0	622.8	555.8	421.7	321.1	309.7
97.5°	82.6	137.3	192.0	205.6	447.8	770.6	932.0	889.6	804.8	741.3	719.6
100°	109.5	159.1	208.7	221.1	489.7	848.0	1027.0	1030.2	1036.4	1041.0	1015.2
102.5°	132.4	178.7	224.9	236.5	508.9	872.3	1053.9	1107.9	1215.9	1296.9	1274.8
105°	171.3	210.5	249.6	259.4	523.2	875.0	1051.0	1172.0	1414.0	1595.6	1583.7
107.5°	211.1	247.6	284.1	293.3	525.9	836.1	991.2	1160.0	1497.7	1750.9	1753.8
110°	238.0	270.9	303.9	312.1	521.9	801.6	941.4	1130.1	1507.6	1790.8	1803.1



TEST NUMBER: P937252

CATALOG NUMBER: SQ4-FB-075U-100D-930-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	264.3	295.7	327.1	335.0	522.0	771.4	896.1	1089.3	1475.7	1765.4	1784.4
115°	304.2	333.2	362.2	369.4	526.8	736.8	841.9	1027.9	1400.1	1679.2	1705.7
117.5°	343.5	369.9	396.2	402.8	536.7	715.2	804.5	972.4	1308.3	1560.2	1589.5
120°	366.4	391.1	416.0	422.1	544.6	707.9	789.6	943.0	1249.9	1480.1	1508.5
122.5°	388.8	413.9	438.8	445.1	556.1	704.1	778.1	916.3	1192.7	1400.0	1428.0
125°	423.2	446.0	468.7	474.4	571.5	700.9	765.7	883.1	1117.8	1293.9	1319.7
127.5°	451.0	474.1	497.1	502.8	587.0	699.2	755.2	856.0	1057.6	1208.8	1230.5
130°	466.0	490.7	515.5	521.7	598.2	700.3	751.3	841.0	1020.5	1155.0	1175.2
132.5°	481.4	506.2	531.0	537.2	607.4	700.9	747.8	828.1	988.7	1109.2	1127.3
135°	504.3	526.8	549.5	555.1	617.3	700.3	741.8	809.1	943.6	1044.5	1060.0
137.5°	527.7	550.1	572.4	578.0	632.3	704.6	740.8	797.6	911.4	996.7	1009.4
140°	547.2	567.7	588.3	593.4	641.4	705.4	737.3	786.5	884.7	958.4	970.3
142.5°	562.1	581.1	600.2	604.9	649.1	707.9	737.3	780.4	866.8	931.5	941.7
145°	585.0	601.6	618.1	622.3	659.0	707.9	732.3	767.7	838.3	891.2	898.9
147.5°	607.9	624.0	640.2	644.2	673.6	712.7	732.3	760.1	815.6	857.3	863.7
150°	622.8	637.4	652.0	655.6	681.2	715.3	732.3	755.8	802.7	837.9	843.1
152.5°	638.2	649.3	660.4	663.1	686.2	716.9	732.3	752.3	792.4	822.4	826.4
155°	661.1	669.3	677.5	679.6	697.2	720.6	732.3	748.2	780.1	804.0	806.6
157.5°	678.1	686.0	694.0	696.0	708.1	724.2	732.3	744.7	769.5	788.1	789.9
160°	689.5	695.7	701.9	703.4	713.1	725.9	732.3	742.9	764.2	780.1	781.2
162.5°	700.9	705.6	710.3	711.5	718.4	727.7	732.3	741.3	759.2	772.6	773.6
165°	713.4	717.6	721.8	722.9	726.0	730.2	732.3	738.8	751.6	761.2	762.3
167.5°	724.9	726.9	728.9	729.4	732.0	735.5	737.3	741.5	749.9	756.3	756.7
170°	732.3	734.3	736.4	736.8	737.0	737.2	737.3	741.5	749.9	756.3	756.3
172.5°	736.4	736.8	737.2	737.3	737.3	737.3	737.3	740.6	747.3	752.3	751.8
175°	741.8	741.8	741.8	741.8	740.3	738.3	737.3	739.4	743.7	746.8	746.8
177.5°	741.8	741.8	741.8	741.8	740.6	739.1	738.3	740.0	743.3	745.7	745.3
180°	741.8	741.8	741.8	741.8	741.8	741.8	741.8	741.8	741.8	741.8	741.8



TEST NUMBER: P937252

CATALOG NUMBER: SQ4-FB-075U-100D-930-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	660.0	660.0
2.5°	704.6	700.3
5°	906.1	910.4
7.5°	1220.2	1218.1
10°	1517.3	1536.4
12.5°	1733.8	1738.0
15°	1865.3	1873.8
17.5°	1916.2	1918.4
20°	1918.4	1914.1
22.5°	1895.0	1890.7
25°	1867.5	1865.3
27.5°	1841.9	1844.1
30°	1831.3	1837.7
32.5°	1831.3	1841.9
35°	1835.6	1846.2
37.5°	1833.5	1846.2
40°	1825.0	1839.8
42.5°	1801.6	1812.2
45°	1765.6	1778.3
47.5°	1718.9	1727.3
50°	1659.5	1667.9
52.5°	1585.2	1587.3
55°	1496.1	1504.6
57.5°	1400.6	1402.7
60°	1294.4	1300.9
62.5°	1182.0	1182.0
65°	1063.2	1067.4
67.5°	940.1	950.7
70°	814.9	817.0
72.5°	691.8	691.8
75°	564.5	566.6
77.5°	443.5	443.5
80°	328.9	331.1
82.5°	227.1	231.3
85°	142.2	142.2
87.5°	65.8	59.4
90°	19.0	19.0
92.5°	75.8	60.7
95°	264.2	218.6
97.5°	632.8	546.1
100°	911.9	808.5
102.5°	1186.3	1097.8
105°	1536.1	1488.5
107.5°	1765.3	1776.8
110°	1852.8	1902.3



TEST NUMBER: P937252

CATALOG NUMBER: SQ4-FB-075U-100D-930-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	1860.5	1936.6
115°	1811.2	1916.7
117.5°	1706.5	1823.6
120°	1622.3	1736.0
122.5°	1540.2	1652.3
125°	1423.1	1526.4
127.5°	1317.7	1404.9
130°	1255.7	1336.2
132.5°	1199.4	1271.5
135°	1122.2	1184.3
137.5°	1060.3	1111.2
140°	1017.9	1065.4
142.5°	982.6	1023.6
145°	929.9	960.9
147.5°	889.3	915.0
150°	863.9	884.7
152.5°	842.0	857.8
155°	817.1	827.4
157.5°	797.2	804.5
160°	785.4	789.6
162.5°	777.6	781.6
165°	766.5	770.6
167.5°	758.4	760.2
170°	756.3	756.3
172.5°	750.3	748.8
175°	746.8	746.8
177.5°	743.6	741.8
180°	741.8	741.8



TEST NUMBER: P937252
 CATALOG NUMBER: SQ4-FB-075U-100D-930-1D-UNV-STD-W-8

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.03	5.95	5.97	6.90	8.15	18.21	19.12	19.14	20.08	21.33
	3H	5.74	6.56	6.69	7.53	8.80	20.05	20.88	21.00	21.84	23.11
	4H	6.04	6.82	7.00	7.79	9.07	20.70	21.48	21.66	22.45	23.73
	6H	6.29	7.01	7.27	7.99	9.28	21.13	21.85	22.11	22.83	24.12
	8H	6.36	7.05	7.34	8.05	9.33	21.26	21.94	22.24	22.94	24.23
	12H	6.38	7.04	7.37	8.03	9.34	21.33	21.98	22.31	22.97	24.28
4H	2H	12.25	13.03	13.22	14.00	15.28	18.49	19.27	19.46	20.24	21.52
	3H	13.83	14.48	14.80	15.48	16.77	20.54	21.19	21.52	22.20	23.49
	4H	13.92	14.52	14.91	15.51	16.83	21.31	21.91	22.30	22.90	24.22
	6H	13.94	14.45	14.93	15.47	16.78	21.85	22.37	22.85	23.39	24.70
	8H	13.91	14.40	14.91	15.41	16.74	22.02	22.50	23.02	23.51	24.84
	12H	13.87	14.31	14.89	15.34	16.67	22.11	22.55	23.13	23.58	24.91
8H	4H	15.37	15.85	16.37	16.87	18.19	21.38	21.86	22.38	22.87	24.20
	6H	15.62	16.02	16.64	17.07	18.40	22.01	22.41	23.03	23.46	24.79
	8H	15.64	15.99	16.67	17.03	18.37	22.23	22.58	23.26	23.62	24.97
	12H	15.61	15.92	16.64	16.95	18.34	22.37	22.69	23.41	23.72	25.11
12H	4H	15.52	15.95	16.54	16.98	18.32	21.33	21.77	22.35	22.79	24.13
	6H	15.88	16.23	16.91	17.27	18.61	21.99	22.34	23.02	23.38	24.73
	8H	15.95	16.26	16.99	17.29	18.68	22.22	22.53	23.26	23.57	24.96