

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: CORELITE

Report Number: P519679

Luminaire Tested: **SQ4-050U-0D-930-1D-UNV-STD-W-12**

Issue Date: 4/29/2021

Test Information

Test Method: LM-79-2019
Report Number: P519679
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-536-21)
Test Lab: INNOVATION CENTER
Issue Date: 4/29/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: CORELITE
Catalog Number: SQ4-050U-0D-930-1D-UNV-STD-W-12
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE
UPLIGHT 500 LUMENS PER FOOT
Light Source: 3000K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4755.2 lumens
Efficiency: N/A
Efficacy: 181.5 lumens/watt
N/A
Luminous Opening: Rectangular (W 0.29' x L: 12' x H: 0')
CIE Type: Indirect

Input Watts (W): 26.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P519679
CATALOG NUMBER: SQ4-050U-0D-930-1D-UNV-STD-W-12

Luminous Intensity Polar Plot

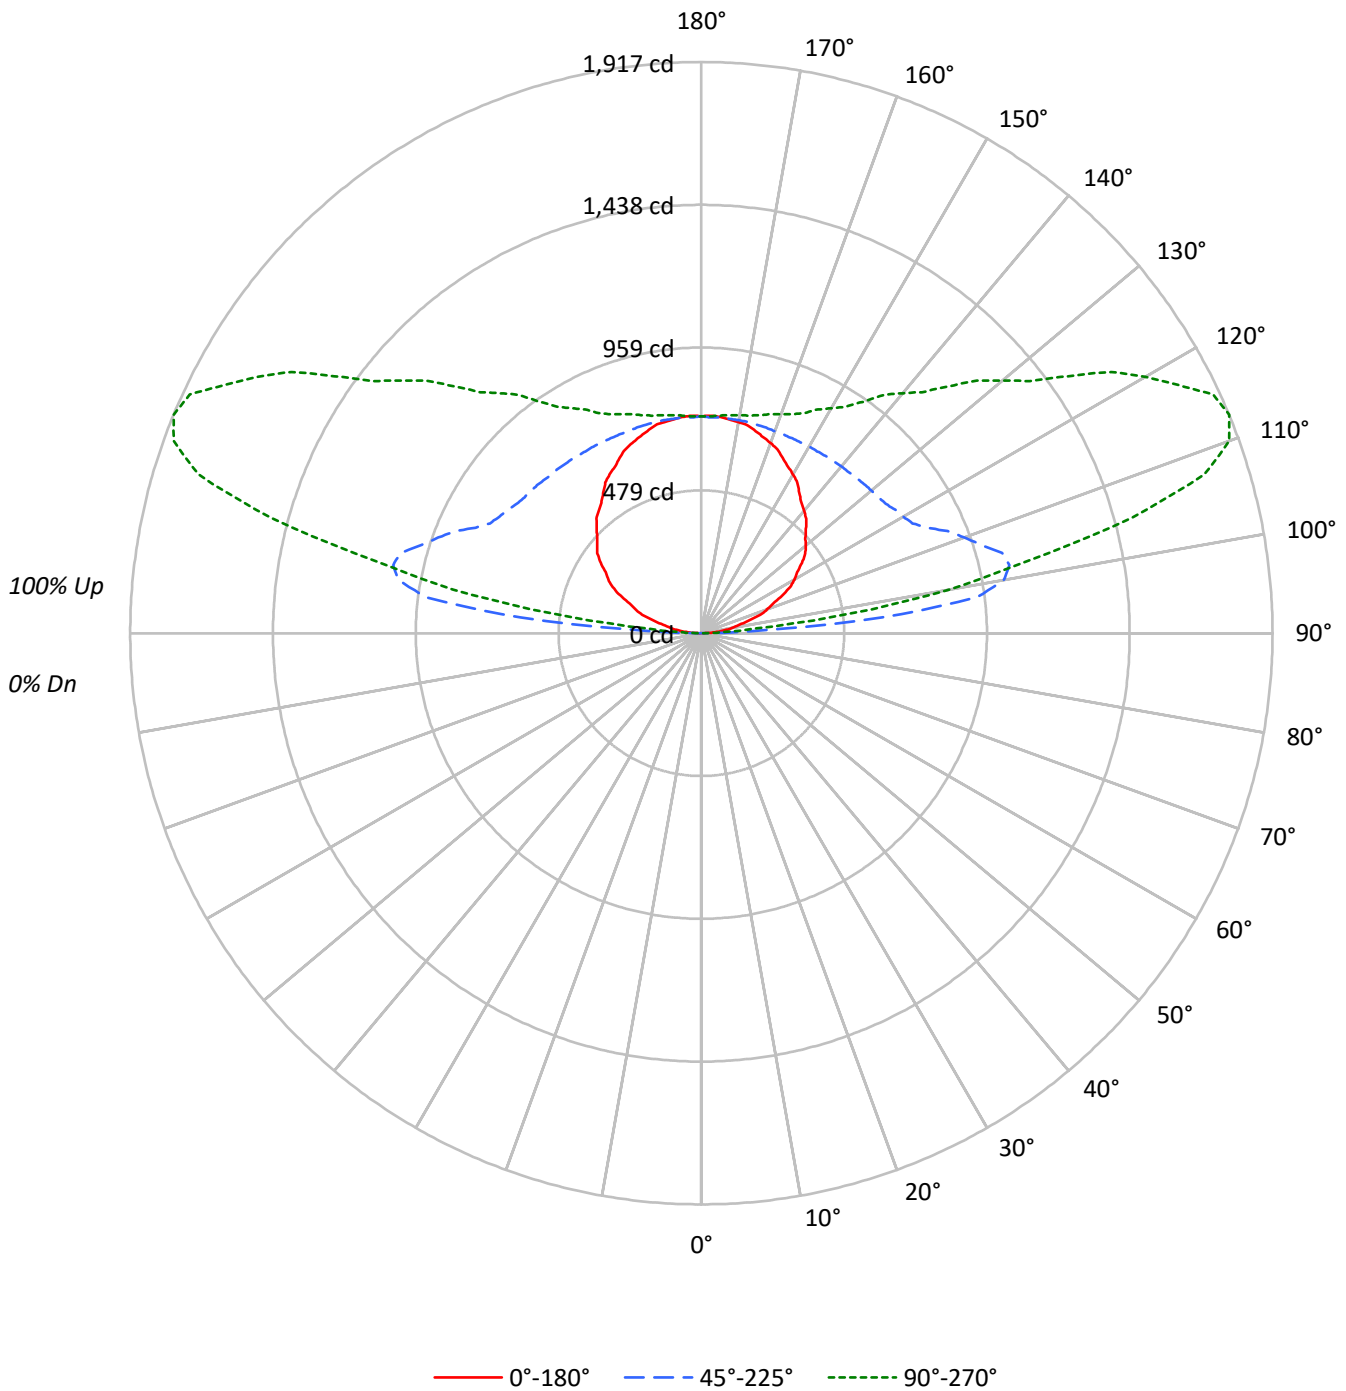



TEST NUMBER: P519679

CATALOG NUMBER: SQ4-050U-0D-930-1D-UNV-STD-W-12

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20								20				20				20	
RC	80								50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	95	95	95	95	81	81	81	81	56	56	56	32	32	32	10	10	10	0
1	87	83	79	76	74	71	68	65	48	47	45	28	27	26	9	9	8	0
2	79	72	66	62	67	62	57	53	42	40	37	24	23	22	8	7	7	0
3	72	63	57	51	61	54	49	44	37	34	31	21	20	18	7	6	6	0
4	65	56	48	43	56	48	42	37	33	29	26	19	17	16	6	6	5	0
5	60	49	42	36	51	42	36	32	29	25	22	17	15	13	5	5	4	0
6	55	44	36	31	47	38	32	27	26	22	19	15	13	11	5	4	4	0
7	50	39	32	27	43	34	28	23	23	19	17	14	11	10	4	4	3	0
8	47	35	28	23	40	30	24	20	21	17	14	12	10	9	4	3	3	0
9	43	32	25	20	37	27	22	18	19	15	13	11	9	8	4	3	3	0
10	40	29	22	18	34	25	19	16	17	14	11	10	8	7	3	3	2	0

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
95°	1817	21486	6281
100°	1907	18290	14972
105°	2003	12410	17781
110°	2127	8444	16951
115°	2181	6084	13786
120°	2218	4811	10587
125°	2210	4056	8061
130°	2185	3563	6308
135°	2159	3198	5093
140°	2153	2933	4221
145°	2154	2726	3561
150°	2187	2570	3093
155°	2201	2448	2765
160°	2223	2361	2560
165°	2237	2304	2408
170°	2245	2267	2318
175°	2248	2241	2263



TEST NUMBER: P519679

CATALOG NUMBER: SQ4-050U-0D-930-1D-UNV-STD-W-12

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	0.0	0.0
10°-20°	0.0	0.0
20°-30°	0.0	0.0
30°-40°	0.0	0.0
40°-50°	0.0	0.0
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	349.6	7.4
100°-110°	949.7	20.0
110°-120°	976.5	20.5
120°-130°	780.7	16.4
130°-140°	613.5	12.9
140°-150°	470.4	9.9
150°-160°	338.3	7.1
160°-170°	206.9	4.4
170°-180°	69.7	1.5
0°-30°	0.0	0.0
0°-40°	0.0	0.0
0°-60°	0.0	0.0
0°-90°	0.0	0.0
90°-120°	2275.9	47.9
90°-150°	4140.4	87.1
90°-180°	4755.0	100.0
0°-180°	4755.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
90°	2	9	16	21	21	
95°	52	191	609	265	178	58
105°	169	262	1044	1590	1496	179
115°	300	364	836	1663	1894	296
125°	412	469	756	1274	1503	367
135°	496	551	735	1038	1171	384
145°	574	615	726	882	948	360
155°	649	672	721	792	815	299
165°	702	712	724	754	756	198
175°	728	731	726	735	733	69
180°	728	728	728	728	728	



TEST NUMBER: P519679

CATALOG NUMBER: SQ4-050U-0D-930-1D-UNV-STD-W-12

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
90°	2.3	9.2	16.4	21.1	21.1
92.5°	21.1	95.7	166.3	71.4	60.4
95°	51.5	191.2	608.9	265.0	178.0
97.5°	85.2	211.2	933.4	726.2	510.0
100°	107.7	224.5	1032.7	1046.9	845.4
102.5°	130.2	237.8	1059.0	1294.7	1117.0
105°	168.6	262.5	1044.4	1590.3	1496.4
107.5°	208.4	291.3	984.0	1742.9	1769.0
110°	236.5	312.1	939.1	1772.9	1885.1
112.5°	260.9	332.8	894.1	1748.0	1917.0
115°	299.7	363.9	836.0	1663.2	1894.5
117.5°	336.3	397.6	799.0	1543.1	1803.6
120°	360.6	420.2	782.2	1462.5	1721.2
122.5°	381.2	440.8	770.9	1381.7	1631.3
125°	412.2	469.4	756.4	1274.4	1503.4
127.5°	439.8	496.6	748.4	1193.2	1389.6
130°	456.6	511.6	744.7	1142.1	1318.4
132.5°	473.5	528.5	740.9	1098.6	1254.7
135°	496.5	551.4	735.3	1038.1	1170.9
137.5°	521.3	571.2	732.5	984.7	1096.4
140°	536.3	584.4	730.6	950.7	1051.5
142.5°	551.3	595.7	728.8	924.1	1008.4
145°	573.7	615.0	726.0	882.0	948.4
147.5°	599.0	634.3	723.6	848.9	901.1
150°	615.9	645.7	723.6	829.9	871.1
152.5°	629.0	655.1	721.7	812.9	846.8
155°	648.7	671.6	721.3	792.0	814.9
157.5°	667.9	685.7	721.3	777.9	795.3
160°	679.1	695.1	721.3	768.4	782.2
162.5°	690.4	702.7	723.1	760.8	770.9
165°	702.5	711.7	723.6	754.1	756.4
167.5°	715.2	719.8	726.0	746.1	748.0
170°	718.9	723.5	726.0	742.3	742.3
172.5°	722.7	725.4	726.0	738.6	738.6
175°	728.3	730.6	726.0	735.3	733.0
177.5°	730.2	730.2	724.5	732.0	728.3
180°	728.3	728.3	728.3	728.3	728.3

(END OF REPORT)