

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: CORELITE

Report Number: P520392

Luminaire Tested: **SQ4-F-150U-075D-835-1D-UNV-STD-W-4**

Issue Date: 4/29/2021

Test Information

Test Method: LM-79-2019
Report Number: P520392
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-536-25, G3-1910-536-18)
Test Lab: INNOVATION CENTER
Issue Date: 4/29/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: CORELITE
Catalog Number: SQ4-F-150U-075D-835-1D-UNV-STD-W-4
Description: CORELITE SQ4 SUSPENDED LED LUMINAIRE
DOWNLIGHT 750 LUMENS PER FOOT
UPLIGHT 1500 LUMENS PER FOOT
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8989.0 lumens
Efficiency: N/A
Efficacy: 141.6 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.35
Luminous Opening: Rectangular (W 0.29' x L: 4' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 63.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P520392
CATALOG NUMBER: SQ4-F-150U-075D-835-1D-UNV-STD-W-4

Luminous Intensity Polar Plot

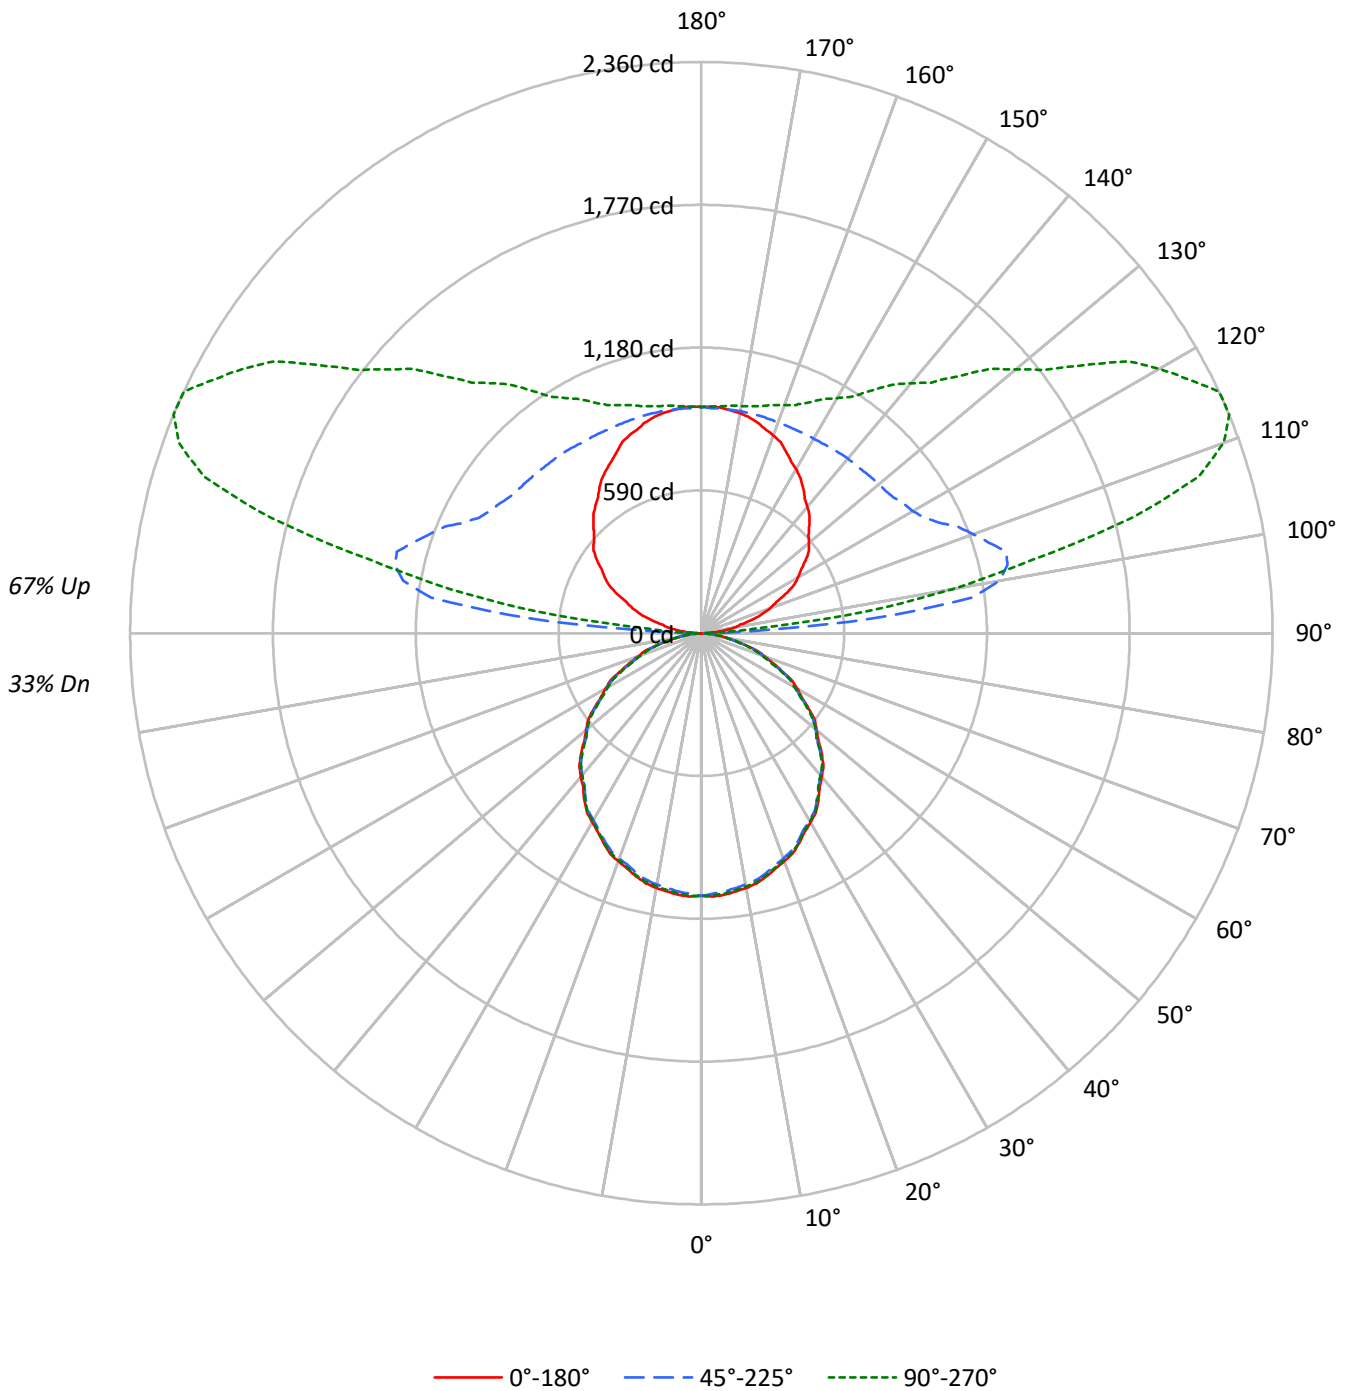



TEST NUMBER: P520392

CATALOG NUMBER: SQ4-F-150U-075D-835-1D-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	93	93	93	93	74	74	74	56	56	56	40	40	40	33
1	94	90	86	83	85	81	78	75	65	62	60	50	48	47	36	35	34	28
2	85	78	72	67	77	71	66	61	57	53	50	43	41	39	31	30	29	23
3	78	69	62	56	70	62	56	51	50	45	42	38	35	33	28	26	24	20
4	71	61	53	47	64	55	48	43	44	39	36	34	31	28	25	23	21	17
5	65	54	46	40	58	49	42	37	39	34	30	30	27	24	22	20	18	14
6	60	48	40	35	54	44	37	32	35	30	26	27	24	21	20	18	16	13
7	55	43	36	30	50	39	33	28	32	27	23	25	21	19	18	16	14	11
8	51	39	32	26	46	36	29	24	29	24	20	23	19	16	17	14	13	10
9	48	36	28	23	43	33	26	22	26	22	18	21	17	15	15	13	11	9
10	44	33	26	21	40	30	24	19	24	20	16	19	16	13	14	12	10	8

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	10014	10014	10014
5°	10052	9925	9998
10°	10012	9883	9957
15°	9936	9813	9897
20°	9846	9729	9807
25°	9737	9637	9708
30°	9614	9508	9562
35°	9488	9388	9432
40°	9328	9233	9221
45°	9167	9053	9077
50°	8912	8842	8842
55°	8705	8594	8516
60°	8425	8280	8208
65°	7971	7820	7713
70°	7486	7300	7113
75°	6734	6491	6349
80°	5388	5281	5228
85°	3229	3642	3747



TEST NUMBER: P520392

CATALOG NUMBER: SQ4-F-150U-075D-835-1D-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	102.5	1.1
10°-20°	291.7	3.2
20°-30°	438.2	4.9
30°-40°	522.9	5.8
40°-50°	536.2	6.0
50°-60°	477.8	5.3
60°-70°	356.3	4.0
70°-80°	193.2	2.1
80°-90°	46.3	0.5
90°-100°	434.2	4.8
100°-110°	1174.0	13.1
110°-120°	1234.3	13.7
120°-130°	1002.6	11.2
130°-140°	786.5	8.7
140°-150°	603.6	6.7
150°-160°	434.1	4.8
160°-170°	265.2	3.0
170°-180°	89.4	1.0
0°-30°	832.3	9.3
0°-40°	1355.2	15.1
0°-60°	2369.2	26.4
0°-90°	2965.0	33.0
90°-120°	2842.5	31.6
90°-150°	5235.2	58.2
90°-180°	6024.0	67.0
0°-180°	8989.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1085	1085	1085	1085	1085	
5°	1085	1084	1072	1080	1080	103
15°	1040	1038	1027	1035	1036	293
25°	956	956	947	952	954	441
35°	842	840	834	834	837	526
45°	703	700	694	694	696	541
55°	541	540	534	529	529	483
65°	365	365	358	354	353	363
75°	189	185	182	179	178	198
85°	30	32	34	34	35	42
90°	2	6	13	14	13	5
95°	67	236	722	374	222	71
105°	218	337	1302	1921	1842	230
115°	384	470	1080	2091	2360	379
125°	526	603	974	1643	1930	469
135°	631	705	947	1326	1502	487
145°	733	788	934	1136	1222	459
155°	828	860	926	1019	1052	382
165°	901	910	930	967	972	254
175°	935	934	931	943	941	89
180°	934	934	934	934	934	



TEST NUMBER: P520392

CATALOG NUMBER: SQ4-F-150U-075D-835-1D-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1085.4	1085.4	1085.4	1085.4	1085.4
2.5°	1089.4	1087.1	1077.5	1085.4	1084.6
5°	1085.4	1083.5	1071.6	1080.5	1079.5
7.5°	1076.6	1074.5	1062.8	1071.6	1071.4
10°	1068.7	1065.8	1054.9	1063.8	1062.8
12.5°	1058.5	1055.6	1044.7	1053.5	1052.6
15°	1040.2	1038.2	1027.4	1035.2	1036.2
17.5°	1019.3	1015.6	1005.9	1013.6	1014.6
20°	1002.8	999.9	990.9	997.8	998.8
22.5°	985.4	982.6	973.6	980.5	981.5
25°	956.5	955.5	946.7	951.6	953.6
27.5°	925.2	922.6	915.4	919.1	921.1
30°	902.4	900.4	892.5	895.5	897.5
32.5°	878.8	877.6	870.5	872.0	874.6
35°	842.4	840.4	833.5	833.6	837.4
37.5°	802.0	799.8	794.1	793.2	794.7
40°	774.5	771.6	766.6	765.6	765.6
42.5°	746.1	744.0	737.5	735.8	738.0
45°	702.6	699.8	693.8	693.8	695.7
47.5°	655.6	654.4	647.5	644.4	645.2
50°	620.9	622.9	616.0	612.2	616.0
52.5°	591.0	589.8	583.7	579.8	581.4
55°	541.2	540.2	534.3	529.4	529.4
57.5°	491.2	488.8	482.6	478.9	481.8
60°	456.6	455.6	448.7	441.9	444.8
62.5°	422.0	420.2	413.3	408.8	410.9
65°	365.1	365.1	358.2	354.3	353.3
67.5°	315.3	310.7	306.8	302.1	300.7
70°	277.5	273.7	270.6	266.6	263.7
72.5°	240.5	238.2	233.6	229.7	229.1
75°	188.9	185.1	182.1	179.1	178.1
77.5°	134.4	133.6	130.9	129.3	129.9
80°	101.4	101.4	99.4	99.4	98.4
82.5°	71.4	72.2	71.8	70.3	70.1
85°	30.5	32.5	34.4	34.4	35.4
87.5°	5.9	10.5	11.2	11.4	11.2
90°	2.0	5.9	13.1	14.1	13.1
92.5°	28.6	104.1	205.3	89.1	64.6
95°	67.4	236.5	722.1	373.7	222.2
97.5°	108.2	271.2	1125.6	931.5	684.1
100°	138.8	285.3	1251.1	1304.8	1055.0
102.5°	167.0	304.8	1295.4	1587.8	1401.0
105°	218.2	337.2	1302.5	1921.1	1842.5
107.5°	265.7	374.3	1245.5	2129.2	2155.3
110°	302.7	401.1	1194.8	2185.0	2296.1



TEST NUMBER: P520392

CATALOG NUMBER: SQ4-F-150U-075D-835-1D-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	335.7	427.7	1148.1	2173.8	2360.4
115°	384.2	469.7	1080.1	2091.0	2360.4
117.5°	431.7	511.9	1035.3	1964.5	2269.9
120°	460.6	539.3	1008.7	1873.7	2185.5
122.5°	488.0	565.1	992.7	1776.5	2090.5
125°	526.0	602.7	973.6	1642.9	1930.0
127.5°	561.0	636.3	962.3	1533.8	1786.4
130°	580.4	658.0	957.5	1466.5	1694.7
132.5°	600.5	677.3	952.7	1405.8	1615.8
135°	630.6	705.3	947.4	1326.5	1501.5
137.5°	660.9	731.6	943.0	1262.2	1404.8
140°	681.9	747.7	941.4	1220.9	1347.7
142.5°	702.0	763.9	938.2	1183.4	1294.6
145°	733.2	788.3	934.4	1135.5	1222.0
147.5°	761.5	810.3	929.9	1091.9	1158.4
150°	782.5	825.7	928.3	1068.3	1121.4
152.5°	801.8	839.5	927.5	1046.3	1090.0
155°	827.7	860.2	926.3	1018.6	1052.0
157.5°	854.7	877.3	926.5	999.1	1021.2
160°	870.0	888.7	927.3	987.0	1002.8
162.5°	882.0	897.5	928.1	977.2	989.1
165°	901.2	910.0	930.3	966.7	971.6
167.5°	914.2	920.3	930.5	957.5	959.9
170°	922.3	925.2	931.3	953.5	953.5
172.5°	928.7	929.3	931.3	948.5	947.8
175°	935.4	934.4	931.3	943.3	941.4
177.5°	937.6	935.2	931.1	939.1	936.8
180°	934.4	934.4	934.4	934.4	934.4

(END OF REPORT)