

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P937114

Luminaire Tested: SQ4-FB-075U-075D-835-1D-UNV-STD-W-4

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P937114
REPORT IS A COMBINATION OF REPORTS P933502 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-075U-075D-835-1D-UNV-STD-W-4
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5401.9 lumens
Efficiency: N/A
Efficacy: 127.4 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 4' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 42.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P937114
CATALOG NUMBER: SQ4-FB-075U-075D-835-1D-UNV-STD-W-4

Luminous Intensity Polar Plot

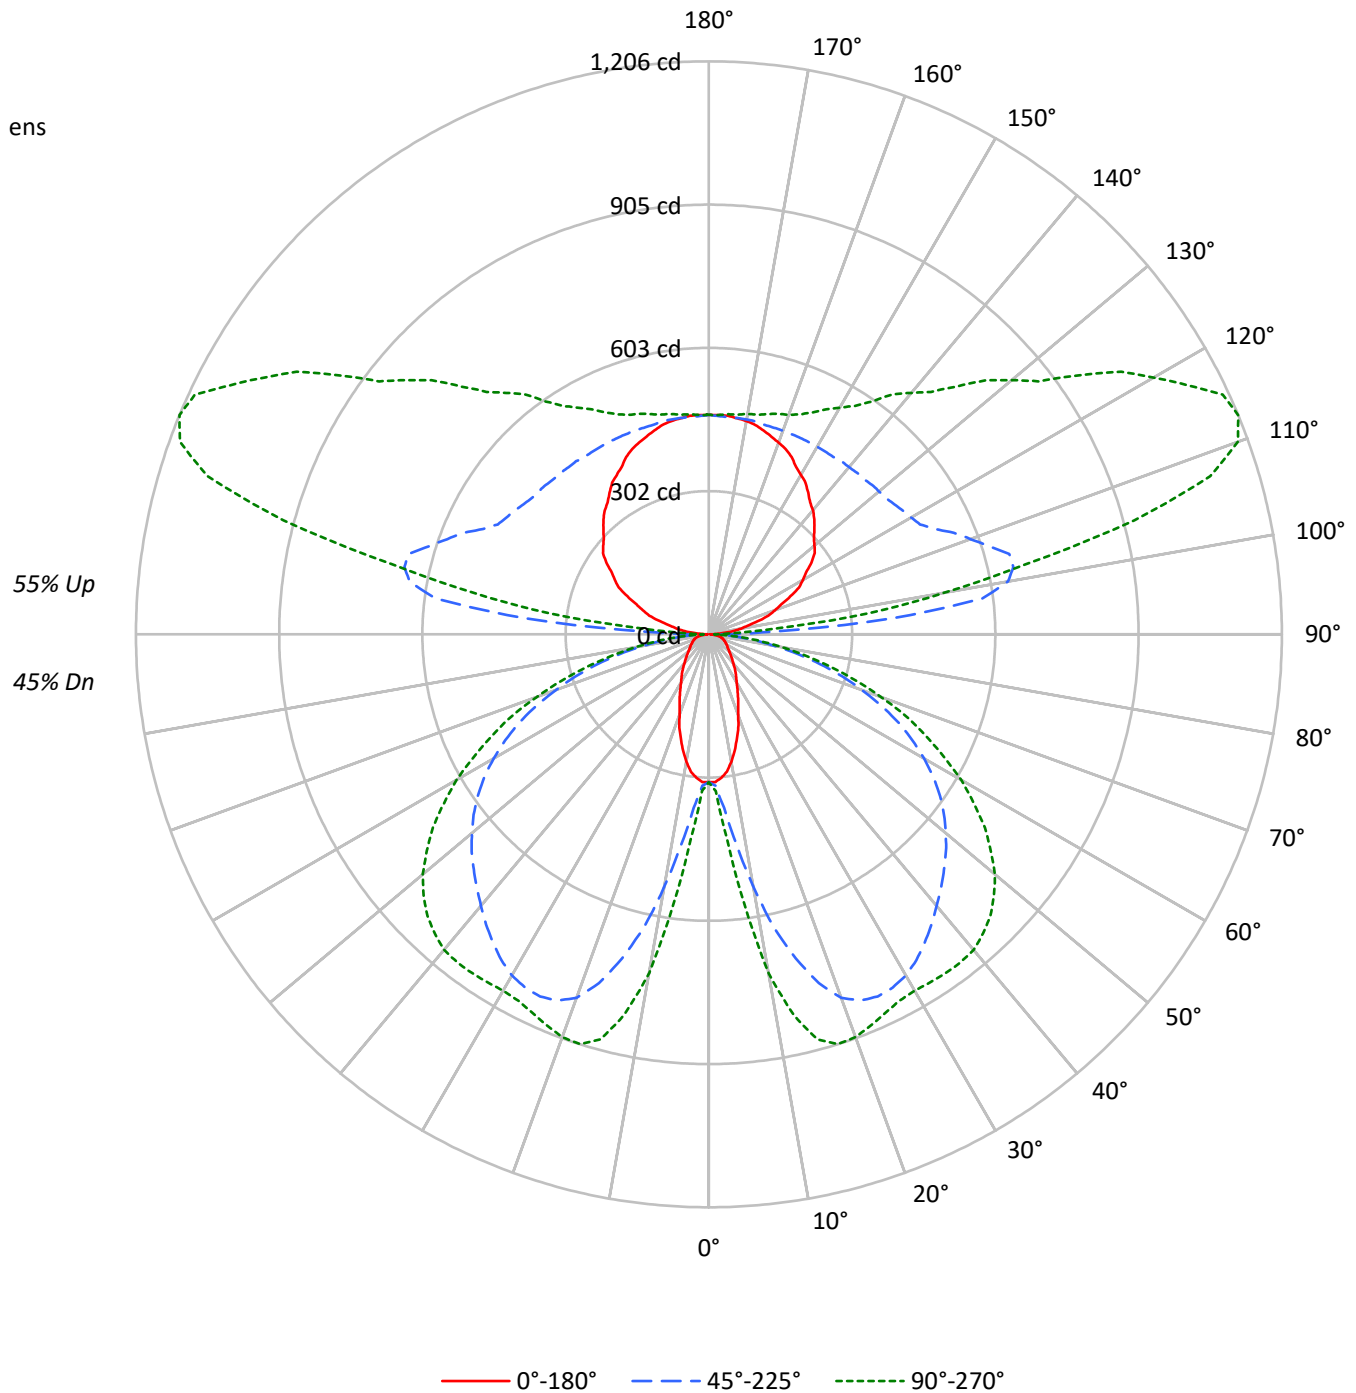



TEST NUMBER: P937114

CATALOG NUMBER: SQ4-FB-075U-075D-835-1D-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	51	51	51	45	45	45	45
1	96	92	88	84	88	84	80	77	70	67	65	57	55	53	44	43	42	37	37	37	37
2	87	79	73	68	79	73	67	63	60	56	53	49	46	44	38	36	35	30	30	30	30
3	79	69	62	56	72	64	57	52	53	48	44	43	39	36	34	31	29	25	25	25	25
4	72	61	53	47	65	56	49	43	46	41	37	38	34	31	30	27	24	21	21	21	21
5	66	54	46	39	60	50	42	37	41	36	31	34	29	26	26	23	21	17	17	17	17
6	60	48	40	34	55	44	37	31	37	31	27	30	26	22	24	21	18	15	15	15	15
7	56	43	35	29	51	40	32	27	33	28	23	27	23	20	21	18	16	13	13	13	13
8	51	39	31	26	47	36	29	24	30	24	21	25	20	17	20	16	14	11	11	11	11
9	48	35	28	23	44	33	26	21	27	22	18	22	18	15	18	15	12	10	10	10	10
10	44	32	25	20	41	30	23	19	25	20	16	21	17	14	16	13	11	9	9	9	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2886	2886	2886
5°	2816	3333	3879
10°	2552	4855	6431
15°	2166	6338	7765
20°	1761	7339	7914
25°	1467	7675	7753
30°	1236	7717	7738
35°	1091	7583	7938
40°	949	7410	8145
45°	858	7282	8177
50°	785	7165	8042
55°	750	6997	7685
60°	765	6680	7122
65°	792	6204	6349
70°	838	5399	5364
75°	918	4391	4186
80°	983	3034	2820
85°	828	1601	1444

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 8177 cd/sqm



TEST NUMBER: P937114

CATALOG NUMBER: SQ4-FB-075U-075D-835-1D-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	40.2	0.7
10°-20°	178.3	3.3
20°-30°	311.9	5.8
30°-40°	401.5	7.4
40°-50°	448.4	8.3
50°-60°	429.5	8.0
60°-70°	340.4	6.3
70°-80°	200.1	3.7
80°-90°	57.4	1.1
90°-100°	225.2	4.2
100°-110°	591.9	11.0
110°-120°	613.8	11.4
120°-130°	492.3	9.1
130°-140°	386.3	7.2
140°-150°	296.5	5.5
150°-160°	213.5	4.0
160°-170°	130.6	2.4
170°-180°	44.1	0.8
0°-30°	530.4	9.8
0°-40°	931.9	17.3
0°-60°	1809.8	33.5
0°-90°	2407.7	44.6
90°-120°	1430.8	26.5
90°-150°	2606.0	48.2
90°-180°	2994.0	55.4
0°-180°	5401.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	311	311	311	311	311	
5°	303	325	366	414	429	28
15°	227	419	706	856	883	63
25°	145	475	841	878	879	67
35°	98	454	792	837	870	61
45°	67	362	700	802	838	52
55°	48	230	594	690	709	44
65°	38	122	441	496	503	38
75°	28	75	242	266	267	29
85°	10	23	60	66	67	11
90°	3	9	24	12	12	3
95°	30	117	388	200	136	33
105°	107	162	654	994	927	113
115°	189	230	524	1046	1194	187
125°	264	295	477	806	950	234
135°	314	346	462	650	738	243
145°	364	388	456	555	598	228
155°	412	423	456	501	515	189
165°	444	450	456	474	480	125
175°	462	462	459	465	465	44
180°	462	462	462	462	462	



TEST NUMBER: P937114

CATALOG NUMBER: SQ4-FB-075U-075D-835-1D-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	311.0	311.0	311.0	311.0	311.0	311.0	311.0	311.0	311.0	311.0	311.0
2.5°	311.0	311.0	313.0	314.0	316.0	317.0	319.0	321.0	327.0	328.0	330.0
5°	303.0	307.0	320.0	325.0	339.0	358.0	366.0	379.0	406.0	414.0	419.0
7.5°	291.0	300.0	332.0	340.0	375.0	425.0	446.0	474.0	517.0	538.0	555.0
10°	272.0	291.0	348.0	367.0	424.0	500.0	539.0	578.0	643.0	672.0	683.0
12.5°	251.0	282.0	365.0	391.0	473.0	584.0	631.0	674.0	748.0	787.0	793.0
15°	227.0	269.0	381.0	419.0	525.0	654.0	706.0	759.0	828.0	856.0	863.0
17.5°	206.0	259.0	396.0	436.0	565.0	717.0	770.0	814.0	870.0	889.0	894.0
20°	180.0	243.0	406.0	458.0	607.0	763.0	814.0	848.0	886.0	898.0	900.0
22.5°	161.0	226.0	412.0	466.0	635.0	791.0	834.0	861.0	887.0	891.0	892.0
25°	145.0	207.0	411.0	475.0	659.0	808.0	841.0	861.0	876.0	878.0	878.0
27.5°	130.0	186.0	407.0	477.0	677.0	812.0	838.0	852.0	859.0	863.0	863.0
30°	117.0	166.0	397.0	473.0	685.0	808.0	829.0	836.0	843.0	849.0	852.0
32.5°	107.0	147.0	382.0	465.0	686.0	798.0	813.0	817.0	827.0	841.0	846.0
35°	98.0	128.0	365.0	454.0	680.0	782.0	792.0	796.0	816.0	837.0	844.0
37.5°	89.0	114.0	343.0	435.0	671.0	763.0	770.0	777.0	808.0	833.0	841.0
40°	80.0	102.0	317.0	414.0	657.0	740.0	746.0	757.0	798.0	827.0	835.0
42.5°	73.0	92.0	289.0	392.0	639.0	714.0	723.0	739.0	786.0	817.0	826.0
45°	67.0	82.0	259.0	362.0	616.0	687.0	700.0	722.0	772.0	802.0	810.0
47.5°	61.0	75.0	228.0	331.0	591.0	660.0	677.0	702.0	753.0	782.0	789.0
50°	56.0	68.0	197.0	298.0	564.0	631.0	651.0	677.0	729.0	756.0	765.0
52.5°	52.0	62.0	168.0	265.0	533.0	601.0	624.0	651.0	700.0	726.0	732.0
55°	48.0	57.0	143.0	230.0	501.0	569.0	594.0	620.0	668.0	690.0	694.0
57.5°	46.0	53.0	122.0	197.0	467.0	533.0	561.0	585.0	630.0	647.0	651.0
60°	43.0	50.0	106.0	169.0	430.0	499.0	523.0	547.0	585.0	599.0	602.0
62.5°	40.0	48.0	94.0	142.0	392.0	459.0	483.0	505.0	537.0	547.0	551.0
65°	38.0	46.0	85.0	122.0	353.0	417.0	441.0	460.0	486.0	496.0	498.0
67.5°	36.0	44.0	78.0	105.0	314.0	375.0	393.0	411.0	431.0	441.0	442.0
70°	33.0	42.0	72.0	93.0	274.0	327.0	342.0	361.0	377.0	382.0	385.0
72.5°	31.0	39.0	68.0	84.0	233.0	281.0	295.0	306.0	320.0	325.0	325.0
75°	28.0	35.0	64.0	75.0	191.0	230.0	242.0	253.0	264.0	266.0	263.0
77.5°	25.0	31.0	55.0	63.0	149.0	182.0	192.0	198.0	207.0	209.0	210.0
80°	21.0	27.0	43.0	49.0	108.0	134.0	141.0	146.0	154.0	154.0	156.0
82.5°	16.0	21.0	31.0	35.0	73.0	92.0	98.0	101.0	106.0	106.0	106.0
85°	10.0	13.0	20.0	23.0	44.0	56.0	60.0	61.0	65.0	66.0	66.0
87.5°	5.0	7.0	13.0	14.0	23.0	29.0	29.0	31.0	31.0	30.0	29.0
90°	3.1	5.6	8.1	8.7	13.7	20.3	23.6	21.0	15.7	11.8	11.8
92.5°	12.4	33.5	54.5	59.8	84.1	116.5	132.7	116.3	83.5	58.9	56.6
95°	29.8	68.4	107.0	116.6	207.0	327.5	387.8	346.0	262.5	199.9	192.8
97.5°	51.5	85.5	119.5	128.0	278.8	479.8	580.3	553.9	501.2	461.6	448.1
100°	68.2	99.0	129.9	137.6	304.9	528.0	639.5	641.4	645.3	648.2	632.1
102.5°	82.5	111.3	140.0	147.2	316.9	543.2	656.3	689.9	757.1	807.5	793.7
105°	106.6	131.0	155.4	161.5	325.8	544.9	654.4	729.8	880.5	993.5	986.1
107.5°	131.4	154.2	176.9	182.6	327.5	520.6	617.2	722.3	932.5	1090.2	1092.0
110°	148.2	168.7	189.3	194.4	325.0	499.1	586.2	703.7	938.7	1115.0	1122.7



TEST NUMBER: P937114

CATALOG NUMBER: SQ4-FB-075U-075D-835-1D-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	164.6	184.2	203.7	208.6	325.1	480.4	558.0	678.3	918.8	1099.2	1111.1
115°	189.4	207.4	225.5	230.0	328.1	458.8	524.2	640.1	871.8	1045.6	1062.0
117.5°	213.9	230.3	246.7	250.8	334.2	445.3	500.9	605.5	814.6	971.5	989.7
120°	228.2	243.6	259.0	262.9	339.1	440.8	491.6	587.2	778.3	921.6	939.3
122.5°	242.1	257.7	273.2	277.1	346.2	438.4	484.5	570.5	742.6	871.7	889.2
125°	263.5	277.7	291.9	295.4	355.9	436.5	476.8	549.9	696.1	805.7	821.8
127.5°	280.9	295.2	309.5	313.1	365.5	435.4	470.3	533.1	658.6	752.7	766.3
130°	290.2	305.6	321.0	324.9	372.5	436.0	467.8	523.7	635.4	719.2	731.7
132.5°	299.8	315.2	330.6	334.5	378.2	436.5	465.6	515.6	615.7	690.7	701.9
135°	314.0	328.0	342.1	345.6	384.4	436.1	461.9	503.8	587.6	650.4	660.1
137.5°	328.6	342.5	356.4	359.9	393.7	438.8	461.3	496.7	567.5	620.6	628.5
140°	340.7	353.5	366.3	369.5	399.4	439.2	459.1	489.7	550.8	596.7	604.1
142.5°	350.0	361.8	373.6	376.6	404.1	440.8	459.1	486.0	539.7	580.0	586.4
145°	364.2	374.6	384.9	387.5	410.3	440.8	456.0	478.0	521.9	554.9	559.7
147.5°	378.5	388.5	398.6	401.1	419.4	443.8	456.0	473.3	507.9	533.8	537.8
150°	387.8	396.9	406.0	408.3	424.2	445.4	456.0	470.6	499.8	521.7	524.9
152.5°	397.4	404.3	411.2	412.9	427.3	446.4	456.0	468.5	493.4	512.1	514.5
155°	411.7	416.8	421.8	423.1	434.1	448.7	456.0	465.9	485.7	500.6	502.2
157.5°	422.2	427.2	432.2	433.4	440.9	451.0	456.0	463.7	479.1	490.7	491.8
160°	429.3	433.2	437.0	438.0	444.0	452.0	456.0	462.6	475.9	485.8	486.4
162.5°	436.5	439.4	442.3	443.0	447.3	453.1	456.0	461.6	472.7	481.1	481.7
165°	444.2	446.8	449.4	450.1	452.1	454.7	456.0	460.0	468.0	474.0	474.7
167.5°	451.3	452.5	453.8	454.1	455.8	458.0	459.1	461.7	467.0	470.9	471.2
170°	456.0	457.2	458.5	458.8	458.9	459.0	459.1	461.7	467.0	470.9	470.9
172.5°	458.5	458.8	459.0	459.1	459.1	459.1	459.1	461.2	465.3	468.4	468.2
175°	461.9	461.9	461.9	461.9	461.0	459.7	459.1	460.4	463.0	465.0	465.0
177.5°	461.9	461.9	461.9	461.9	461.2	460.2	459.7	460.7	462.8	464.4	464.1
180°	461.9	461.9	461.9	461.9	461.9	461.9	461.9	461.9	461.9	461.9	461.9



TEST NUMBER: P937114

CATALOG NUMBER: SQ4-FB-075U-075D-835-1D-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	311.0	<i>311.0</i>
2.5°	332.0	<i>330.0</i>
5°	427.0	<i>429.0</i>
7.5°	575.0	<i>574.0</i>
10°	715.0	<i>724.0</i>
12.5°	817.0	<i>819.0</i>
15°	879.0	<i>883.0</i>
17.5°	903.0	<i>904.0</i>
20°	904.0	<i>902.0</i>
22.5°	893.0	<i>891.0</i>
25°	880.0	<i>879.0</i>
27.5°	868.0	<i>869.0</i>
30°	863.0	<i>866.0</i>
32.5°	863.0	<i>868.0</i>
35°	865.0	<i>870.0</i>
37.5°	864.0	<i>870.0</i>
40°	860.0	<i>867.0</i>
42.5°	849.0	<i>854.0</i>
45°	832.0	<i>838.0</i>
47.5°	810.0	<i>814.0</i>
50°	782.0	<i>786.0</i>
52.5°	747.0	<i>748.0</i>
55°	705.0	<i>709.0</i>
57.5°	660.0	<i>661.0</i>
60°	610.0	<i>613.0</i>
62.5°	557.0	<i>557.0</i>
65°	501.0	<i>503.0</i>
67.5°	443.0	<i>448.0</i>
70°	384.0	<i>385.0</i>
72.5°	326.0	<i>326.0</i>
75°	266.0	<i>267.0</i>
77.5°	209.0	<i>209.0</i>
80°	155.0	<i>156.0</i>
82.5°	107.0	<i>109.0</i>
85°	67.0	<i>67.0</i>
87.5°	31.0	<i>28.0</i>
90°	11.8	<i>11.8</i>
92.5°	47.2	<i>37.8</i>
95°	164.5	<i>136.1</i>
97.5°	394.1	<i>340.1</i>
100°	567.8	<i>503.4</i>
102.5°	738.6	<i>683.5</i>
105°	956.5	<i>926.9</i>
107.5°	1099.2	<i>1106.4</i>
110°	1153.6	<i>1184.5</i>



TEST NUMBER: P937114

CATALOG NUMBER: SQ4-FB-075U-075D-835-1D-UNV-STD-W-4

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	1158.5	1205.9
115°	1127.8	1193.5
117.5°	1062.6	1135.5
120°	1010.1	1080.9
122.5°	959.0	1028.9
125°	886.1	950.4
127.5°	820.5	874.8
130°	781.9	832.0
132.5°	746.8	791.7
135°	698.8	737.5
137.5°	660.2	691.9
140°	633.8	663.4
142.5°	611.8	637.3
145°	579.0	598.3
147.5°	553.8	569.8
150°	537.9	550.9
152.5°	524.3	534.1
155°	508.7	515.2
157.5°	496.4	500.9
160°	489.0	491.6
162.5°	484.2	486.7
165°	477.3	479.9
167.5°	472.3	473.4
170°	470.9	470.9
172.5°	467.2	466.2
175°	465.0	465.0
177.5°	463.0	461.9
180°	461.9	461.9



TEST NUMBER: P937114
 CATALOG NUMBER: SQ4-FB-075U-075D-835-1D-UNV-STD-W-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	4.16	5.00	5.15	6.02	7.36	17.30	18.14	18.29	19.15	20.50
	3H	4.86	5.62	5.87	6.64	8.01	19.12	19.88	20.12	20.90	22.26
	4H	5.16	5.88	6.18	6.91	8.28	19.75	20.47	20.77	21.50	22.87
	6H	5.41	6.08	6.44	7.10	8.49	20.17	20.84	21.20	21.86	23.25
	8H	5.48	6.11	6.51	7.16	8.54	20.28	20.92	21.32	21.96	23.34
	12H	5.49	6.10	6.53	7.14	8.54	20.34	20.95	21.38	21.99	23.39
4H	2H	11.35	12.07	12.37	13.09	14.46	17.57	18.29	18.59	19.31	20.69
	3H	12.91	13.52	13.95	14.57	15.96	19.60	20.20	20.63	21.25	22.64
	4H	13.01	13.56	14.05	14.61	16.01	20.35	20.91	21.40	21.95	23.36
	6H	13.02	13.50	14.07	14.56	15.97	20.88	21.36	21.93	22.43	23.83
	8H	13.00	13.44	14.05	14.50	15.92	21.04	21.48	22.09	22.54	23.96
	12H	12.95	13.36	14.02	14.43	15.85	21.12	21.52	22.19	22.60	24.02
8H	4H	14.44	14.89	15.49	15.95	17.37	20.41	20.86	21.47	21.92	23.34
	6H	14.68	15.05	15.76	16.15	17.57	21.03	21.40	22.11	22.50	23.92
	8H	14.70	15.03	15.78	16.11	17.55	21.24	21.57	22.33	22.65	24.09
	12H	14.67	14.96	15.76	16.04	17.51	21.38	21.66	22.47	22.74	24.22
12H	4H	14.58	14.99	15.65	16.06	17.48	20.37	20.77	21.44	21.84	23.27
	6H	14.94	15.26	16.02	16.35	17.78	21.01	21.34	22.10	22.42	23.86
	8H	15.01	15.29	16.09	16.37	17.85	21.24	21.52	22.32	22.60	24.08