

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: CORELITE

Report Number: P519650

Luminaire Tested: **SQ4-025U-0D-835-1D-UNV-STD-W-8**

Issue Date: 4/29/2021

Test Information

Test Method: LM-79-2019
Report Number: P519650
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-536-32)
Test Lab: INNOVATION CENTER
Issue Date: 4/29/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: CORELITE
Catalog Number: SQ4-025U-0D-835-1D-UNV-STD-W-8
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE
UPLIGHT 250 LUMENS PER FOOT
Light Source: 3500K CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1931.8 lumens
Efficiency: N/A
Efficacy: 184.0 lumens/watt
N/A
Luminous Opening: Rectangular (W 0.29' x L: 8' x H: 0')
CIE Type: Indirect

Input Watts (W): 10.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P519650
CATALOG NUMBER: SQ4-025U-0D-835-1D-UNV-STD-W-8

Luminous Intensity Polar Plot

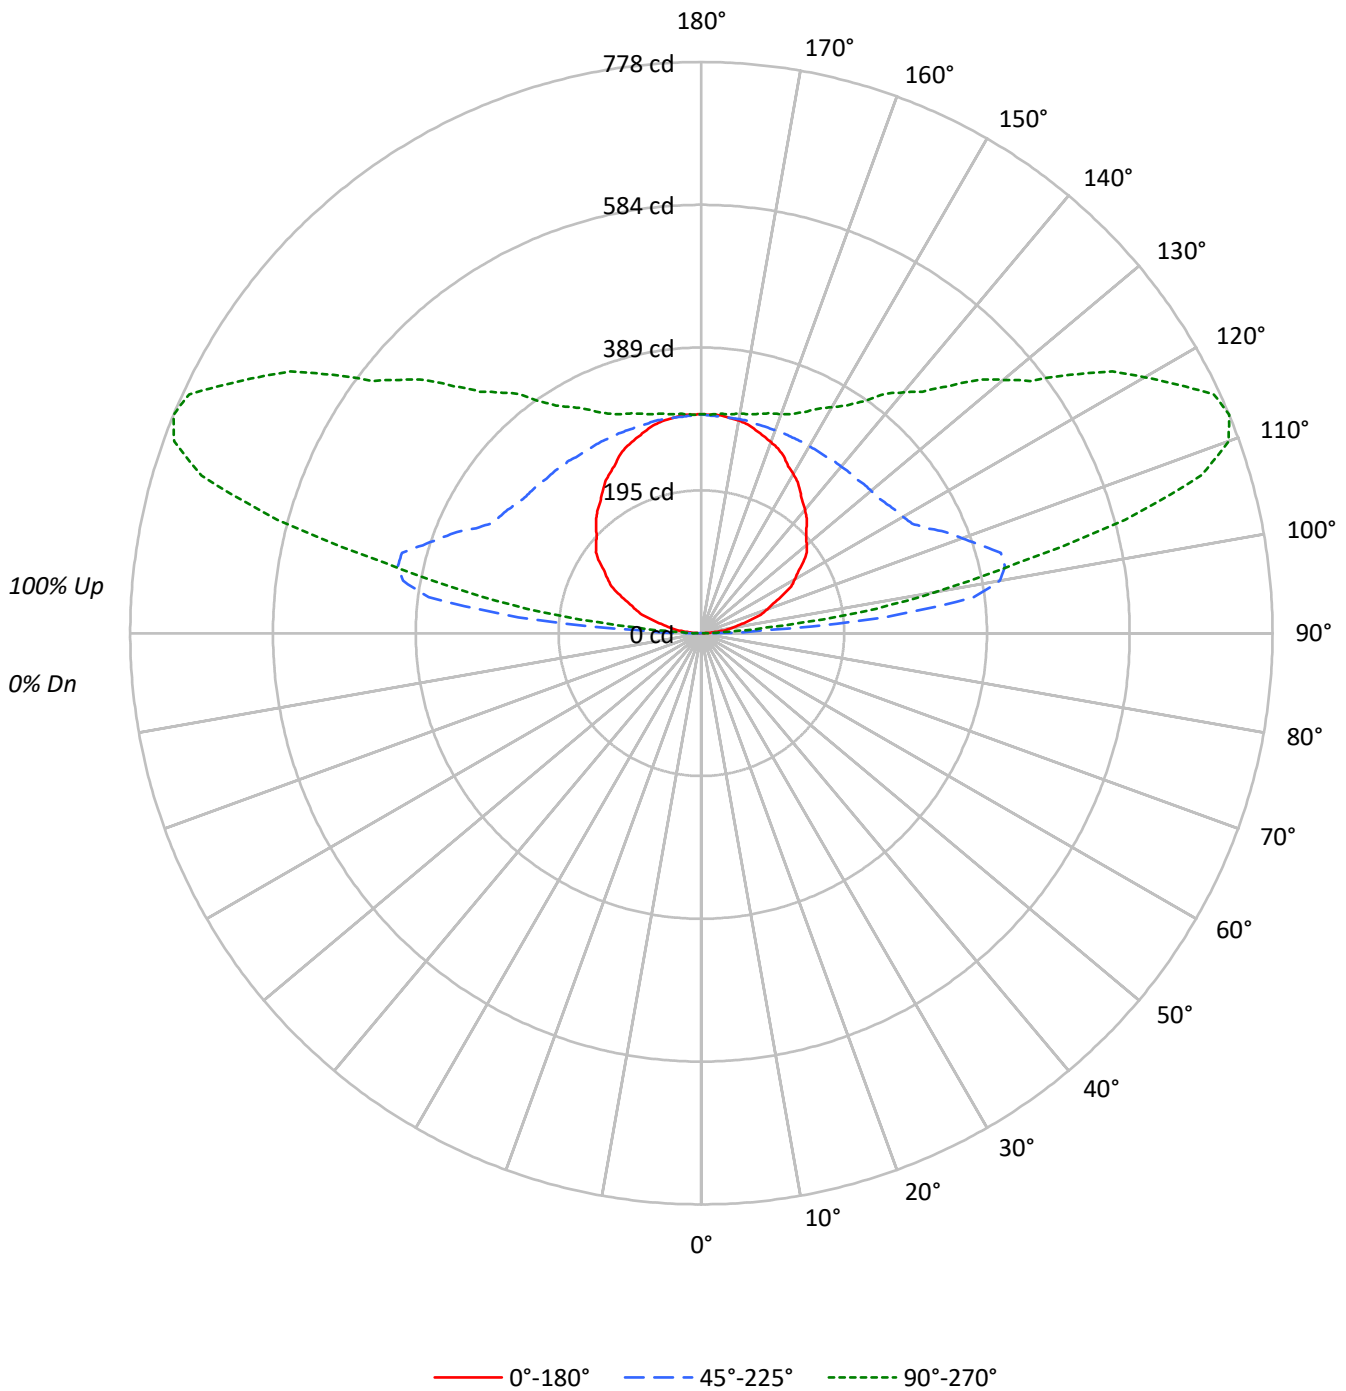



TEST NUMBER: P519650

CATALOG NUMBER: SQ4-025U-0D-835-1D-UNV-STD-W-8

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20								20				20				20				20
RC	80								50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	95	95	95	95	81	81	81	81	56	56	56	32	32	32	10	10	10	10	10	10	0
1	87	83	79	76	74	71	68	65	48	47	45	28	27	26	9	9	8	8	8	8	0
2	79	72	66	62	67	62	57	53	42	40	37	24	23	22	8	7	7	7	7	7	0
3	72	63	57	51	61	54	49	44	37	34	31	21	20	18	7	6	6	6	6	6	0
4	65	56	48	43	56	48	42	37	33	29	26	19	17	16	6	6	5	5	5	5	0
5	60	49	42	36	51	42	36	32	29	25	22	17	15	13	5	5	4	4	4	4	0
6	55	44	36	31	47	38	32	27	26	22	19	15	13	11	5	4	4	4	4	4	0
7	50	39	32	27	43	34	28	23	23	19	17	14	11	10	4	4	3	3	3	3	0
8	47	35	28	23	40	30	24	20	21	17	14	12	10	9	4	3	3	3	3	3	0
9	43	32	25	20	37	27	22	18	19	15	13	11	9	8	4	3	3	3	3	3	0
10	40	29	22	18	34	25	19	16	17	14	11	10	8	7	3	3	2	2	2	2	0

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
95°	1011	13248	4652
100°	1166	10964	8629
105°	1226	7525	10659
110°	1288	5102	10307
115°	1335	3692	8405
120°	1357	2927	6434
125°	1367	2474	4933
130°	1343	2167	3853
135°	1321	1944	3103
140°	1323	1783	2577
145°	1323	1657	2173
150°	1333	1567	1893
155°	1352	1497	1692
160°	1360	1444	1557
165°	1369	1405	1478
170°	1378	1387	1423
175°	1380	1371	1389



TEST NUMBER: P519650

CATALOG NUMBER: SQ4-025U-0D-835-1D-UNV-STD-W-8

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	0.0	0.0
10°-20°	0.0	0.0
20°-30°	0.0	0.0
30°-40°	0.0	0.0
40°-50°	0.0	0.0
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	145.3	7.5
100°-110°	381.9	19.8
110°-120°	396.0	20.5
120°-130°	317.6	16.4
130°-140°	249.2	12.9
140°-150°	191.3	9.9
150°-160°	137.8	7.1
160°-170°	84.3	4.4
170°-180°	28.5	1.5
0°-30°	0.0	0.0
0°-40°	0.0	0.0
0°-60°	0.0	0.0
0°-90°	0.0	0.0
90°-120°	923.2	47.8
90°-150°	1681.3	87.0
90°-180°	1932.0	100.0
0°-180°	1931.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
90°	2	6	15	8	8	
95°	19	75	250	129	88	23
105°	69	104	422	641	598	73
115°	122	148	338	675	770	121
125°	170	191	308	520	613	151
135°	202	223	298	420	476	157
145°	235	250	294	358	386	147
155°	266	273	294	323	332	122
165°	287	290	294	306	310	81
175°	298	298	296	300	300	28
180°	298	298	298	298	298	



TEST NUMBER: P519650

CATALOG NUMBER: SQ4-025U-0D-835-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
90°	1.9	5.6	15.3	7.6	7.6
92.5°	8.0	38.7	85.6	37.9	24.5
95°	19.1	75.1	250.3	129.0	87.9
97.5°	33.2	82.6	374.5	297.8	219.3
100°	43.9	88.8	412.7	418.2	324.8
102.5°	53.1	95.0	423.4	520.9	441.0
105°	68.8	104.3	422.2	641.0	598.0
107.5°	84.8	117.7	398.2	703.3	713.8
110°	95.5	125.4	378.3	719.4	764.2
112.5°	106.2	134.6	360.0	709.2	778.0
115°	122.3	148.4	338.2	674.7	770.0
117.5°	137.9	161.9	323.3	626.8	732.5
120°	147.1	169.5	317.2	594.6	697.4
122.5°	156.3	178.7	312.6	562.5	663.7
125°	170.0	190.6	307.6	519.9	613.3
127.5°	181.1	202.0	303.4	485.5	564.4
130°	187.2	209.7	301.9	464.0	536.9
132.5°	193.4	215.8	300.3	445.5	510.9
135°	202.5	223.1	298.0	419.7	475.7
137.5°	212.1	232.2	297.7	400.4	446.3
140°	219.7	238.4	296.1	385.0	428.0
142.5°	225.8	243.0	296.1	374.2	411.2
145°	235.0	249.9	294.2	357.9	385.9
147.5°	244.2	258.7	294.2	344.4	367.6
150°	250.3	263.4	294.2	336.7	355.4
152.5°	256.4	266.5	294.2	330.5	344.7
155°	265.6	273.0	294.2	323.1	332.4
157.5°	272.4	279.5	294.2	316.5	323.3
160°	277.0	282.6	294.2	313.4	317.2
162.5°	281.6	285.7	294.2	310.4	314.1
165°	286.6	290.3	294.2	305.8	309.5
167.5°	291.2	293.0	296.1	303.8	305.3
170°	294.2	296.1	296.1	303.8	303.8
172.5°	295.8	296.1	296.1	302.2	300.7
175°	298.0	298.0	296.1	300.0	300.0
177.5°	298.0	298.0	296.5	299.5	298.0
180°	298.0	298.0	298.0	298.0	298.0

(END OF REPORT)