

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: CORELITE

Report Number: P519746

Luminaire Tested: **SQ4-125U-0D-835-1D-UNV-STD-W-8**

Issue Date: 4/29/2021

**Test Information**

Test Method: LM-79-2019  
Report Number: P519746  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-536-24)  
Test Lab: INNOVATION CENTER  
Issue Date: 4/29/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: CORELITE  
Catalog Number: SQ4-125U-0D-835-1D-UNV-STD-W-8  
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE  
UPLIGHT 1250 LUMENS PER FOOT  
Light Source: 3500K CCT, 80 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 9998.6 lumens  
Efficiency: N/A  
Efficacy: 162.3 lumens/watt  
N/A  
Luminous Opening: Rectangular (W 0.29' x L: 8' x H: 0')  
CIE Type: Indirect

Input Watts (W): 61.6  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P519746  
CATALOG NUMBER: SQ4-125U-0D-835-1D-UNV-STD-W-8

### Luminous Intensity Polar Plot

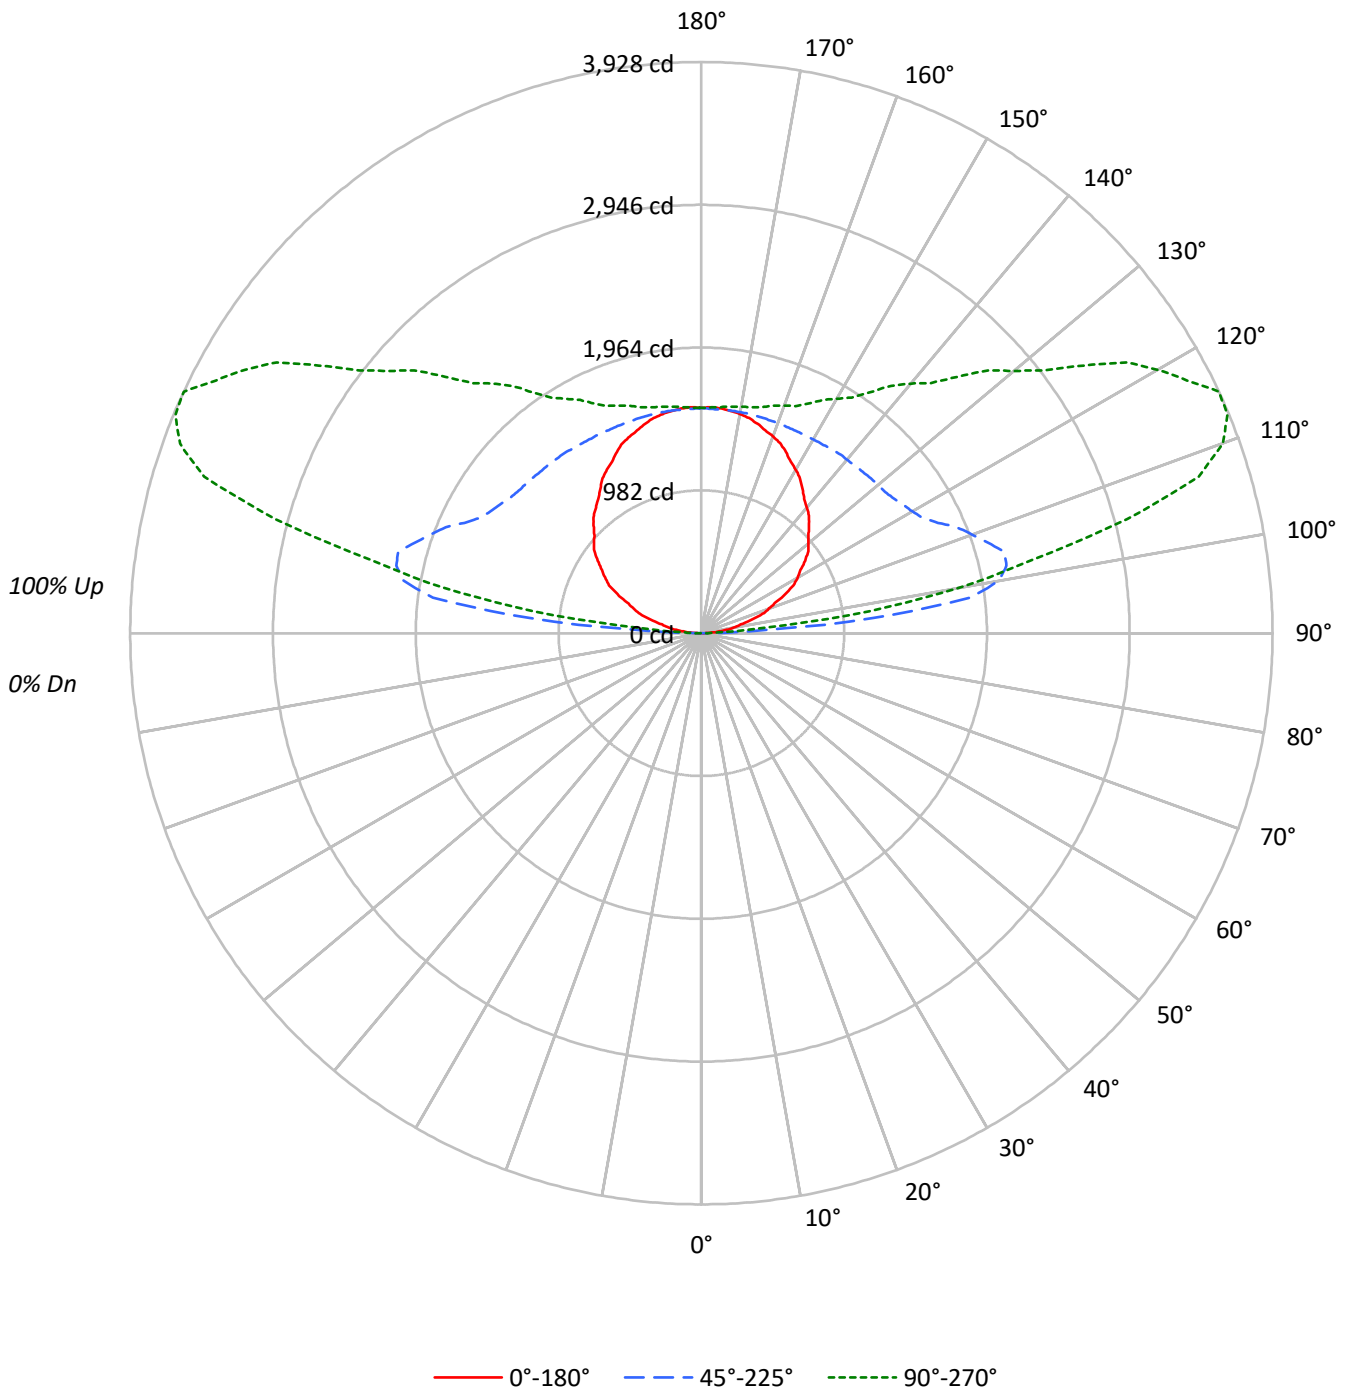



TEST NUMBER: P519746

CATALOG NUMBER: SQ4-125U-0D-835-1D-UNV-STD-W-8

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20								20				20				20	
RC	80								50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	95	95	95	95	81	81	81	81	56	56	56	32	32	32	10	10	10	0
1	87	83	79	76	74	71	68	65	48	47	45	28	27	26	9	9	8	0
2	79	72	66	62	67	62	57	53	42	40	37	24	23	22	8	7	7	0
3	72	63	57	51	61	54	49	44	37	34	31	21	20	18	7	6	6	0
4	65	56	48	43	56	48	42	37	33	29	26	19	17	16	6	6	5	0
5	60	49	42	36	51	42	36	32	29	25	22	17	15	13	5	5	4	0
6	55	44	36	31	47	38	32	27	26	22	19	15	13	11	5	4	4	0
7	50	39	32	27	43	34	28	23	23	19	17	14	11	10	4	4	3	0
8	47	35	28	23	40	30	24	20	21	17	14	12	10	9	4	3	3	0
9	43	32	25	20	37	27	22	18	19	15	13	11	9	8	4	3	3	0
10	40	29	22	18	34	25	19	16	17	14	11	10	8	7	3	3	2	0

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
95°	5849	62870	22246
100°	6028	55193	47909
105°	6436	38472	54016
110°	6679	26745	51468
115°	6956	19620	42879
120°	7063	15455	33440
125°	6998	12980	25818
130°	6910	11384	20121
135°	6835	10233	16257
140°	6796	9386	13498
145°	6822	8722	11378
150°	6916	8198	9911
155°	7000	7813	8868
160°	7071	7545	8165
165°	7124	7359	7689
170°	7172	7227	7403
175°	7181	7145	7227



TEST NUMBER: P519746

CATALOG NUMBER: SQ4-125U-0D-835-1D-UNV-STD-W-8

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	0.0	0.0
10°-20°	0.0	0.0
20°-30°	0.0	0.0
30°-40°	0.0	0.0
40°-50°	0.0	0.0
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	724.6	7.2
100°-110°	1951.8	19.5
110°-120°	2048.3	20.5
120°-130°	1662.1	16.6
130°-140°	1303.6	13.0
140°-150°	1000.8	10.0
150°-160°	719.6	7.2
160°-170°	439.6	4.4
170°-180°	148.3	1.5
0°-30°	0.0	0.0
0°-40°	0.0	0.0
0°-60°	0.0	0.0
0°-90°	0.0	0.0
90°-120°	4724.6	47.3
90°-150°	8691.2	86.9
90°-180°	9999.0	100.0
0°-180°	9998.6	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
90°	4	12	24	26	26	
95°	110	394	1188	607	420	123
105°	361	562	2158	3229	3031	380
115°	637	780	1797	3473	3928	627
125°	870	999	1614	2728	3210	777
135°	1048	1169	1569	2201	2492	809
145°	1211	1306	1549	1882	2020	760
155°	1375	1425	1535	1688	1742	633
165°	1492	1509	1541	1602	1610	421
175°	1551	1549	1543	1564	1561	147
180°	1549	1549	1549	1549	1549	



TEST NUMBER: P519746

CATALOG NUMBER: SQ4-125U-OD-835-1D-UNV-STD-W-8

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
90°	3.9	11.7	23.7	25.6	25.6
92.5°	48.1	170.1	336.2	161.9	112.5
95°	110.5	394.1	1187.8	607.4	420.3
97.5°	176.4	451.1	1862.9	1556.3	1173.6
100°	226.9	473.8	2077.6	2173.8	1803.4
102.5°	275.8	505.8	2148.6	2636.2	2332.1
105°	361.1	561.7	2158.5	3229.3	3030.6
107.5°	441.6	620.6	2066.6	3534.1	3585.4
110°	495.2	665.0	1982.9	3628.7	3815.9
112.5°	552.1	709.5	1902.4	3607.8	3915.3
115°	637.3	780.1	1797.4	3473.0	3928.3
117.5°	715.0	848.9	1716.2	3258.0	3765.0
120°	765.5	894.8	1675.1	3103.6	3624.5
122.5°	809.7	937.4	1645.1	2945.7	3465.1
125°	870.1	999.4	1613.9	2727.8	3210.1
127.5°	928.1	1055.4	1594.2	2535.7	2966.3
130°	962.8	1090.2	1586.3	2425.6	2803.7
132.5°	997.6	1123.4	1578.4	2328.6	2675.8
135°	1047.7	1169.2	1568.6	2200.6	2491.9
137.5°	1095.4	1212.0	1563.4	2092.1	2331.3
140°	1128.6	1240.5	1558.7	2025.3	2241.4
142.5°	1163.3	1267.5	1555.5	1963.0	2145.1
145°	1211.4	1306.0	1548.8	1881.5	2020.4
147.5°	1263.5	1345.7	1542.1	1812.9	1922.1
150°	1298.3	1369.6	1539.0	1769.9	1860.6
152.5°	1329.8	1391.9	1537.4	1734.8	1808.5
155°	1375.2	1425.4	1535.0	1688.2	1742.2
157.5°	1415.1	1454.0	1535.4	1655.4	1691.7
160°	1440.3	1473.1	1537.0	1636.3	1663.3
162.5°	1462.4	1489.0	1538.6	1620.3	1639.6
165°	1491.6	1509.0	1540.9	1602.3	1610.0
167.5°	1515.3	1525.3	1542.9	1588.4	1591.5
170°	1531.1	1534.9	1542.9	1580.4	1580.4
172.5°	1540.5	1541.3	1544.5	1572.5	1572.5
175°	1550.8	1548.9	1542.9	1564.5	1560.7
177.5°	1555.2	1552.1	1544.1	1556.7	1553.6
180°	1548.8	1548.8	1548.8	1548.8	1548.8

(END OF REPORT)