

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P937316

Luminaire Tested: SQ4-FB-075U-125D-835-1D-UNV-STD-W-8

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P937316
REPORT IS A COMBINATION OF REPORTS P933520 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-075U-125D-835-1D-UNV-STD-W-8
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 14135.0 lumens
Efficiency: N/A
Efficacy: 114.0 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 8' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 124
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P937316
CATALOG NUMBER: SQ4-FB-075U-125D-835-1D-UNV-STD-W-8

Luminous Intensity Polar Plot

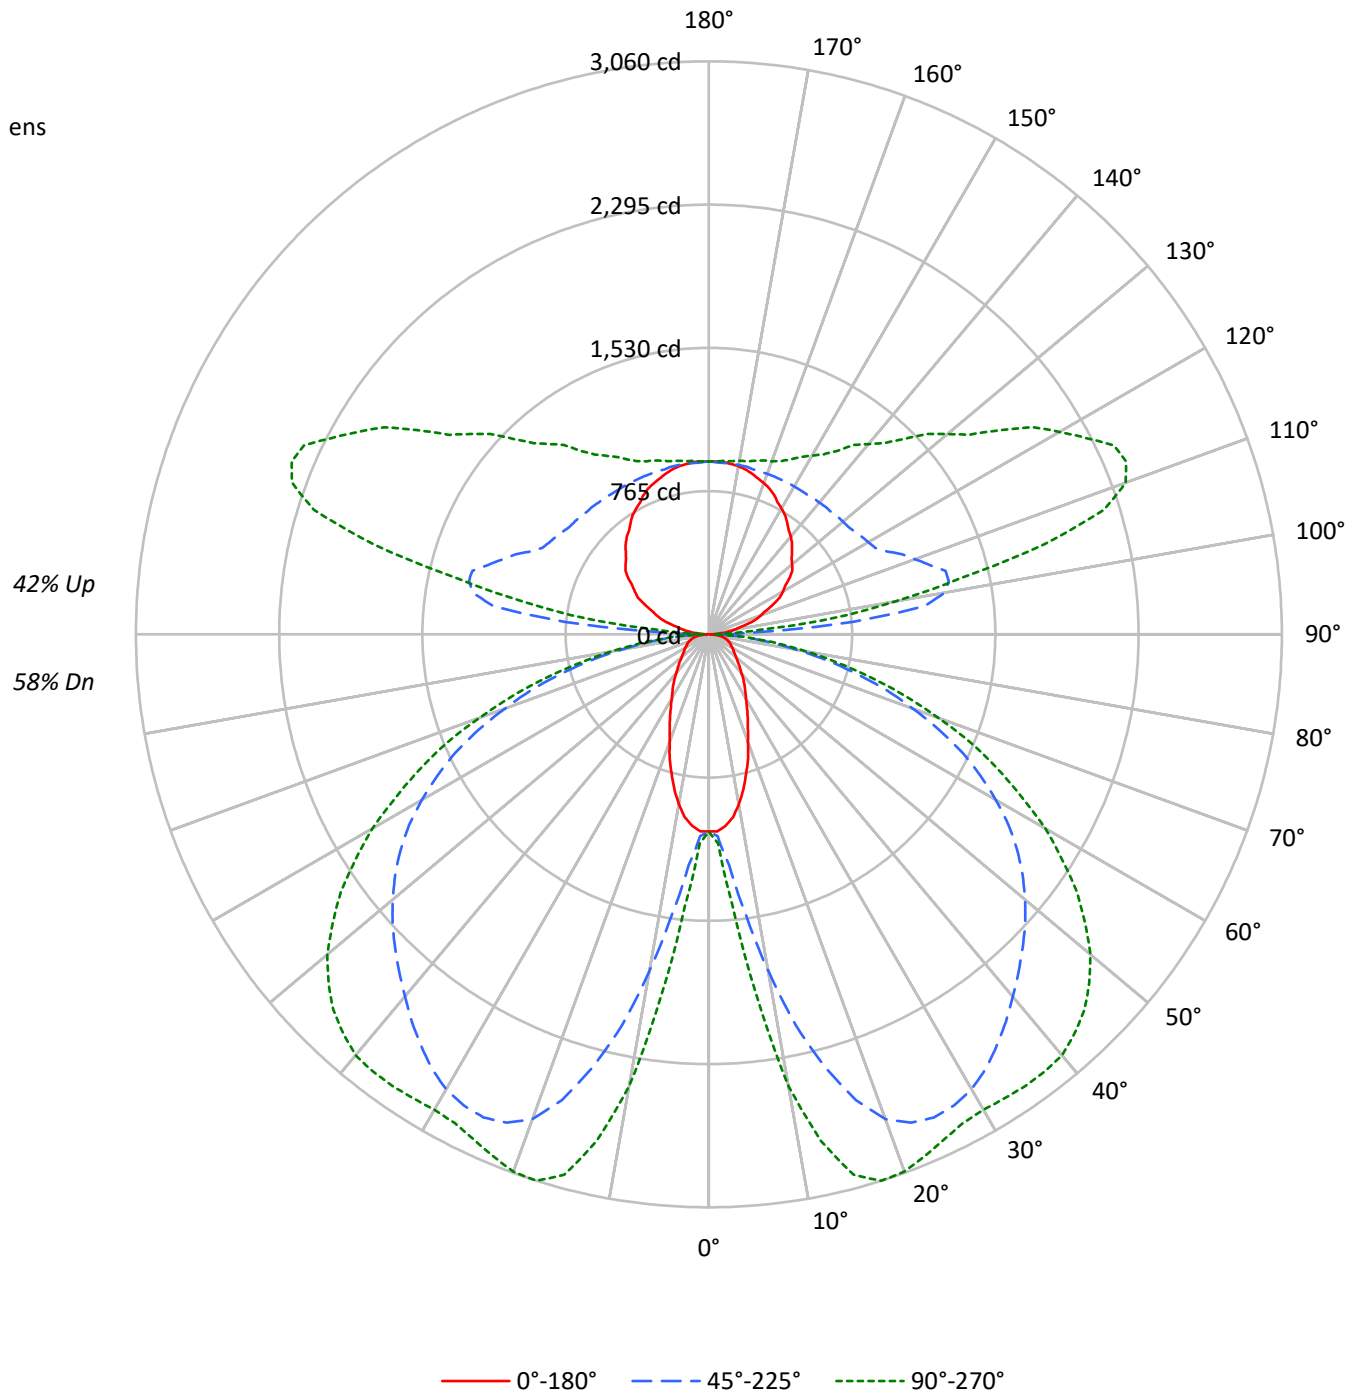



TEST NUMBER: P937316

CATALOG NUMBER: SQ4-FB-075U-125D-835-1D-UNV-STD-W-8

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	109	109	109	109	102	102	102	102	88	88	88	75	75	75	63	63	63	58			58
1	99	94	90	86	92	88	84	81	76	73	71	65	63	61	55	53	52	47			47
2	89	82	75	69	83	76	70	65	66	61	57	56	53	50	47	45	43	38			38
3	81	71	63	57	75	66	59	54	57	52	47	49	45	41	41	38	36	32			32
4	74	62	54	48	68	58	51	45	50	45	40	43	39	35	36	33	30	27			27
5	68	55	47	40	63	52	44	38	45	39	34	38	34	30	33	29	26	23			23
6	62	49	41	35	57	46	38	33	40	34	29	34	29	26	29	25	22	19			19
7	57	44	36	30	53	41	34	28	36	30	25	31	26	22	26	22	19	17			17
8	53	40	32	26	49	37	30	25	33	27	22	28	23	20	24	20	17	15			15
9	49	36	28	23	46	34	27	22	30	24	20	26	21	18	22	18	15	13			13
10	46	33	26	21	43	31	24	20	27	22	18	24	19	16	20	16	14	12			12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4884	4884	4884
5°	4771	5645	6564
10°	4328	8228	10883
15°	3678	10750	13141
20°	2994	12457	13392
25°	2498	13036	13121
30°	2106	13118	13096
35°	1862	12900	13434
40°	1623	12617	13785
45°	1470	12410	13838
50°	1348	12223	13609
55°	1291	11950	13006
60°	1322	11425	12054
65°	1375	10628	10745
70°	1465	9268	9077
75°	1624	7557	7084
80°	1774	5241	4773
85°	1574	2781	2443

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 13838 cd/sqm



TEST NUMBER: P937316

CATALOG NUMBER: SQ4-FB-075U-125D-835-1D-UNV-STD-W-8

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	136.2	1.0
10°-20°	603.5	4.3
20°-30°	1055.6	7.5
30°-40°	1358.8	9.6
40°-50°	1517.7	10.7
50°-60°	1453.6	10.3
60°-70°	1152.0	8.2
70°-80°	677.4	4.8
80°-90°	191.7	1.4
90°-100°	450.3	3.2
100°-110°	1183.8	8.4
110°-120°	1227.5	8.7
120°-130°	984.6	7.0
130°-140°	772.6	5.5
140°-150°	593.0	4.2
150°-160°	427.0	3.0
160°-170°	261.3	1.8
170°-180°	88.3	0.6
0°-30°	1795.2	12.7
0°-40°	3154.0	22.3
0°-60°	6125.4	43.3
0°-90°	8146.5	57.6
90°-120°	2861.7	20.2
90°-150°	5211.9	36.9
90°-180°	5988.0	42.4
0°-180°	14135.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1053	1053	1053	1053	1053	
5°	1026	1100	1239	1401	1452	95
15°	768	1418	2390	2897	2989	214
25°	491	1608	2846	2972	2975	226
35°	332	1537	2681	2833	2945	207
45°	227	1225	2369	2714	2836	175
55°	162	778	2010	2335	2400	148
65°	129	413	1493	1679	1702	127
75°	95	254	819	900	904	99
85°	34	78	203	223	227	36
90°	6	17	47	24	24	7
95°	60	233	776	400	272	66
105°	213	323	1309	1987	1854	226
115°	379	460	1048	2091	2387	374
125°	527	591	954	1611	1901	468
135°	628	691	924	1301	1475	486
145°	728	775	912	1110	1197	456
155°	823	846	912	1001	1030	378
165°	888	900	912	948	960	251
175°	924	924	918	930	930	88
180°	924	924	924	924	924	



TEST NUMBER: P937316

CATALOG NUMBER: SQ4-FB-075U-125D-835-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	1052.6	1052.6	1052.6	1052.6	1052.6	1052.6	1052.6	1052.6	1052.6	1052.6	1052.6
2.5°	1052.6	1052.6	1059.4	1062.8	1069.5	1072.9	1079.7	1086.5	1106.8	1110.2	1116.9
5°	1025.5	1039.1	1083.1	1100.0	1147.4	1211.7	1238.8	1282.8	1374.1	1401.2	1418.1
7.5°	984.9	1015.4	1123.7	1150.8	1269.2	1438.5	1509.5	1604.3	1749.8	1820.9	1878.5
10°	920.6	984.9	1177.8	1242.1	1435.1	1692.3	1824.3	1956.3	2176.3	2274.5	2311.7
12.5°	849.5	954.5	1235.4	1323.4	1600.9	1976.6	2135.7	2281.2	2531.7	2663.7	2684.0
15°	768.3	910.5	1289.5	1418.1	1776.9	2213.5	2389.5	2568.9	2802.5	2897.2	2920.9
17.5°	697.2	876.6	1340.3	1475.7	1912.3	2426.8	2606.1	2755.1	2944.6	3008.9	3025.8
20°	609.2	822.5	1374.1	1550.1	2054.5	2582.5	2755.1	2870.1	2998.8	3039.4	3046.1
22.5°	544.9	764.9	1394.5	1577.2	2149.2	2677.2	2822.8	2914.1	3002.1	3015.7	3019.1
25°	490.8	700.6	1391.1	1607.7	2230.5	2734.8	2846.5	2914.1	2964.9	2971.7	2971.7
27.5°	440.0	629.5	1377.5	1614.5	2291.4	2748.3	2836.3	2883.7	2907.4	2920.9	2920.9
30°	396.0	561.8	1343.7	1600.9	2318.5	2734.8	2805.8	2829.5	2853.2	2873.5	2883.7
32.5°	362.2	497.5	1292.9	1573.8	2321.8	2700.9	2751.7	2765.2	2799.1	2846.5	2863.4
35°	331.7	433.2	1235.4	1536.6	2301.5	2646.8	2680.6	2694.1	2761.8	2832.9	2856.6
37.5°	301.2	385.8	1160.9	1472.3	2271.1	2582.5	2606.1	2629.8	2734.8	2819.4	2846.5
40°	270.8	345.2	1072.9	1401.2	2223.7	2504.6	2524.9	2562.1	2700.9	2799.1	2826.1
42.5°	247.1	311.4	978.2	1326.8	2162.8	2416.6	2447.1	2501.2	2660.3	2765.2	2795.7
45°	226.8	277.5	876.6	1225.2	2084.9	2325.2	2369.2	2443.7	2612.9	2714.5	2741.5
47.5°	206.5	253.8	771.7	1120.3	2000.3	2233.8	2291.4	2376.0	2548.6	2646.8	2670.5
50°	189.5	230.2	666.8	1008.6	1908.9	2135.7	2203.4	2291.4	2467.4	2558.8	2589.2
52.5°	176.0	209.8	568.6	896.9	1804.0	2034.1	2112.0	2203.4	2369.2	2457.2	2477.5
55°	162.5	192.9	484.0	778.5	1695.7	1925.8	2010.5	2098.5	2260.9	2335.4	2348.9
57.5°	155.7	179.4	412.9	666.8	1580.6	1804.0	1898.8	1980.0	2132.3	2189.8	2203.4
60°	145.5	169.2	358.8	572.0	1455.4	1688.9	1770.1	1851.4	1980.0	2027.4	2037.5
62.5°	135.4	162.5	318.2	480.6	1326.8	1553.5	1634.8	1709.2	1817.5	1851.4	1864.9
65°	128.6	155.7	287.7	412.9	1194.8	1411.4	1492.6	1556.9	1644.9	1678.8	1685.5
67.5°	121.8	148.9	264.0	355.4	1062.8	1269.2	1330.1	1391.1	1458.8	1492.6	1496.0
70°	111.7	142.2	243.7	314.8	927.4	1106.8	1157.5	1221.8	1276.0	1292.9	1303.1
72.5°	104.9	132.0	230.2	284.3	788.6	951.1	998.5	1035.7	1083.1	1100.0	1100.0
75°	94.8	118.5	216.6	253.8	646.5	778.5	819.1	856.3	893.5	900.3	890.2
77.5°	84.6	104.9	186.2	213.2	504.3	616.0	649.8	670.2	700.6	707.4	710.8
80°	71.1	91.4	145.5	165.8	365.5	453.5	477.2	494.2	521.2	521.2	528.0
82.5°	54.2	71.1	104.9	118.5	247.1	311.4	331.7	341.8	358.8	358.8	358.8
85°	33.8	44.0	67.7	77.8	148.9	189.5	203.1	206.5	220.0	223.4	223.4
87.5°	16.9	23.7	44.0	47.4	77.8	98.2	98.2	104.9	104.9	101.5	98.2
90°	6.2	11.2	16.2	17.4	27.3	40.5	47.1	41.9	31.4	23.6	23.6
92.5°	24.8	67.0	109.2	119.7	168.3	233.0	265.4	232.6	167.0	117.8	113.1
95°	59.5	136.7	213.8	233.1	413.9	655.0	775.6	692.1	525.1	399.9	385.7
97.5°	102.9	171.0	239.1	256.1	557.6	959.6	1160.6	1107.8	1002.3	923.2	896.2
100°	136.4	198.1	259.9	275.3	609.9	1056.0	1279.0	1282.9	1290.6	1296.4	1264.2
102.5°	164.9	222.5	280.1	294.5	633.8	1086.3	1312.5	1379.7	1514.2	1615.1	1587.5
105°	213.3	262.1	310.8	323.0	651.6	1089.7	1308.8	1459.5	1760.9	1987.0	1972.2
107.5°	262.9	308.4	353.8	365.2	654.9	1041.2	1234.4	1444.6	1865.1	2180.5	2184.1
110°	296.4	337.4	378.4	388.7	649.9	998.2	1172.4	1407.4	1877.5	2230.1	2245.5



TEST NUMBER: P937316

CATALOG NUMBER: SQ4-FB-075U-125D-835-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	329.2	368.3	407.4	417.2	650.1	960.7	1116.0	1356.6	1837.7	2198.5	2222.2
115°	378.8	414.9	451.0	460.0	656.1	917.6	1048.4	1280.1	1743.6	2091.2	2124.1
117.5°	427.8	460.6	493.4	501.6	668.4	890.7	1001.9	1211.0	1629.3	1943.0	1979.4
120°	456.3	487.1	518.0	525.7	678.2	881.6	983.3	1174.4	1556.6	1843.2	1878.6
122.5°	484.2	515.4	546.5	554.3	692.5	876.8	969.0	1141.1	1485.3	1743.4	1778.3
125°	527.0	555.4	583.7	590.8	711.7	872.9	953.5	1099.7	1392.0	1611.3	1643.5
127.5°	561.7	590.4	619.0	626.2	731.0	870.7	940.5	1066.0	1317.0	1505.3	1532.4
130°	580.3	611.1	642.0	649.7	745.0	872.1	935.6	1047.3	1270.8	1438.4	1463.5
132.5°	599.5	630.4	661.3	669.0	756.4	872.9	931.2	1031.2	1231.3	1381.3	1403.8
135°	628.0	656.1	684.3	691.3	768.8	872.1	923.8	1007.6	1175.1	1300.7	1320.1
137.5°	657.2	685.0	712.8	719.8	787.4	877.5	922.5	993.3	1135.0	1241.2	1257.0
140°	681.4	707.0	732.6	739.0	798.7	878.4	918.2	979.4	1101.7	1193.5	1208.3
142.5°	700.0	723.7	747.4	753.3	808.3	881.6	918.2	971.9	1079.4	1160.0	1172.7
145°	728.5	749.2	769.8	775.0	820.7	881.6	912.0	956.0	1043.9	1109.8	1119.4
147.5°	757.0	777.1	797.3	802.3	838.9	887.6	912.0	946.6	1015.7	1067.6	1075.6
150°	775.6	793.8	812.0	816.5	848.3	890.8	912.0	941.2	999.6	1043.4	1049.9
152.5°	794.8	808.6	822.4	825.8	854.5	892.8	912.0	936.9	986.8	1024.2	1029.1
155°	823.3	833.5	843.7	846.3	868.2	897.4	912.0	931.8	971.5	1001.3	1004.5
157.5°	844.4	854.3	864.2	866.7	881.8	901.9	912.0	927.4	958.3	981.4	983.7
160°	858.7	866.4	874.1	876.0	888.0	904.0	912.0	925.2	951.7	971.5	972.8
162.5°	872.9	878.7	884.5	886.0	894.7	906.2	912.0	923.2	945.5	962.2	963.4
165°	888.4	893.6	898.9	900.2	904.1	909.4	912.0	920.0	936.0	948.0	949.3
167.5°	902.7	905.2	907.7	908.3	911.6	916.0	918.2	923.4	933.9	941.8	942.3
170°	912.0	914.5	917.0	917.6	917.8	918.1	918.2	923.4	933.9	941.8	941.8
172.5°	917.0	917.5	918.1	918.2	918.2	918.2	918.2	922.3	930.6	936.8	936.3
175°	923.8	923.8	923.8	923.8	921.9	919.4	918.2	920.8	926.1	930.0	930.0
177.5°	923.8	923.8	923.8	923.8	922.3	920.4	919.4	921.5	925.6	928.7	928.2
180°	923.8	923.8	923.8	923.8	923.8	923.8	923.8	923.8	923.8	923.8	923.8



TEST NUMBER: P937316

CATALOG NUMBER: SQ4-FB-075U-125D-835-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	1052.6	1052.6
2.5°	1123.7	1116.9
5°	1445.2	1452.0
7.5°	1946.1	1942.8
10°	2420.0	2450.5
12.5°	2765.2	2772.0
15°	2975.1	2988.6
17.5°	3056.3	3059.7
20°	3059.7	3052.9
22.5°	3022.5	3015.7
25°	2978.5	2975.1
27.5°	2937.8	2941.2
30°	2920.9	2931.1
32.5°	2920.9	2937.8
35°	2927.7	2944.6
37.5°	2924.3	2944.6
40°	2910.8	2934.5
42.5°	2873.5	2890.5
45°	2816.0	2836.3
47.5°	2741.5	2755.1
50°	2646.8	2660.3
52.5°	2528.3	2531.7
55°	2386.1	2399.7
57.5°	2233.8	2237.2
60°	2064.6	2074.8
62.5°	1885.2	1885.2
65°	1695.7	1702.5
67.5°	1499.4	1516.3
70°	1299.7	1303.1
72.5°	1103.4	1103.4
75°	900.3	903.7
77.5°	707.4	707.4
80°	524.6	528.0
82.5°	362.2	368.9
85°	226.8	226.8
87.5°	104.9	94.8
90°	23.6	23.6
92.5°	94.4	75.6
95°	329.0	272.2
97.5°	788.1	680.1
100°	1135.6	1006.9
102.5°	1477.3	1367.1
105°	1912.9	1853.7
107.5°	2198.4	2212.7
110°	2307.3	2369.0



TEST NUMBER: P937316

CATALOG NUMBER: SQ4-FB-075U-125D-835-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	2316.9	2411.7
115°	2255.5	2386.9
117.5°	2125.2	2271.0
120°	2020.3	2161.9
122.5°	1918.0	2057.7
125°	1772.2	1900.9
127.5°	1641.0	1749.6
130°	1563.7	1664.0
132.5°	1493.6	1583.4
135°	1397.5	1474.9
137.5°	1320.4	1383.8
140°	1267.6	1326.8
142.5°	1223.7	1274.7
145°	1158.0	1196.6
147.5°	1107.5	1139.5
150°	1075.8	1101.7
152.5°	1048.6	1068.2
155°	1017.5	1030.4
157.5°	992.8	1001.9
160°	978.1	983.3
162.5°	968.4	973.4
165°	954.5	959.7
167.5°	944.5	946.7
170°	941.8	941.8
172.5°	934.4	932.5
175°	930.0	930.0
177.5°	926.0	923.8
180°	923.8	923.8



TEST NUMBER: P937316
 CATALOG NUMBER: SQ4-FB-075U-125D-835-1D-UNV-STD-W-8

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.18	8.16	8.06	9.07	10.22	20.36	21.34	21.24	22.25	23.40
	3H	7.90	8.78	8.79	9.69	10.87	22.21	23.09	23.10	24.01	25.19
	4H	8.20	9.04	9.11	9.96	11.15	22.86	23.70	23.77	24.62	25.81
	6H	8.46	9.23	9.38	10.16	11.36	23.30	24.07	24.22	25.00	26.20
	8H	8.53	9.26	9.46	10.21	11.41	23.42	24.16	24.35	25.10	26.30
	12H	8.55	9.25	9.48	10.19	11.42	23.49	24.19	24.43	25.13	26.36
4H	2H	14.41	15.25	15.32	16.17	17.36	20.65	21.48	21.56	22.41	23.60
	3H	15.99	16.69	16.91	17.64	18.85	22.71	23.41	23.63	24.36	25.56
	4H	16.09	16.73	17.03	17.68	18.91	23.48	24.12	24.41	25.07	26.29
	6H	16.11	16.66	17.06	17.63	18.86	24.02	24.58	24.97	25.55	26.78
	8H	16.09	16.61	17.04	17.57	18.82	24.19	24.71	25.14	25.67	26.92
	12H	16.05	16.52	17.02	17.50	18.75	24.29	24.76	25.26	25.74	26.99
8H	4H	17.55	18.06	18.50	19.03	20.27	23.55	24.07	24.50	25.03	26.28
	6H	17.79	18.22	18.77	19.23	20.47	24.18	24.61	25.16	25.62	26.86
	8H	17.81	18.19	18.80	19.19	20.45	24.41	24.79	25.39	25.78	27.04
	12H	17.79	18.12	18.78	19.11	20.42	24.56	24.89	25.55	25.88	27.19
12H	4H	17.69	18.16	18.67	19.15	20.40	23.51	23.98	24.48	24.96	26.21
	6H	18.05	18.43	19.04	19.43	20.69	24.17	24.55	25.15	25.54	26.80
	8H	18.13	18.46	19.12	19.45	20.76	24.40	24.74	25.40	25.73	27.04