

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: CORELITE

Report Number: P519743

Luminaire Tested: **SQ4-125U-0D-835-1D-UNV-STD-W-12**

Issue Date: 4/29/2021

Test Information

Test Method: LM-79-2019
Report Number: P519743
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-536-24)
Test Lab: INNOVATION CENTER
Issue Date: 4/29/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: CORELITE
Catalog Number: SQ4-125U-0D-835-1D-UNV-STD-W-12
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE
UPLIGHT 1250 LUMENS PER FOOT
Light Source: 3500K CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 14998.0 lumens
Efficiency: N/A
Efficacy: 161.3 lumens/watt
N/A
Luminous Opening: Rectangular (W 0.29' x L: 12' x H: 0')
CIE Type: Indirect

Input Watts (W): 93
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P519743
CATALOG NUMBER: SQ4-125U-0D-835-1D-UNV-STD-W-12

Luminous Intensity Polar Plot

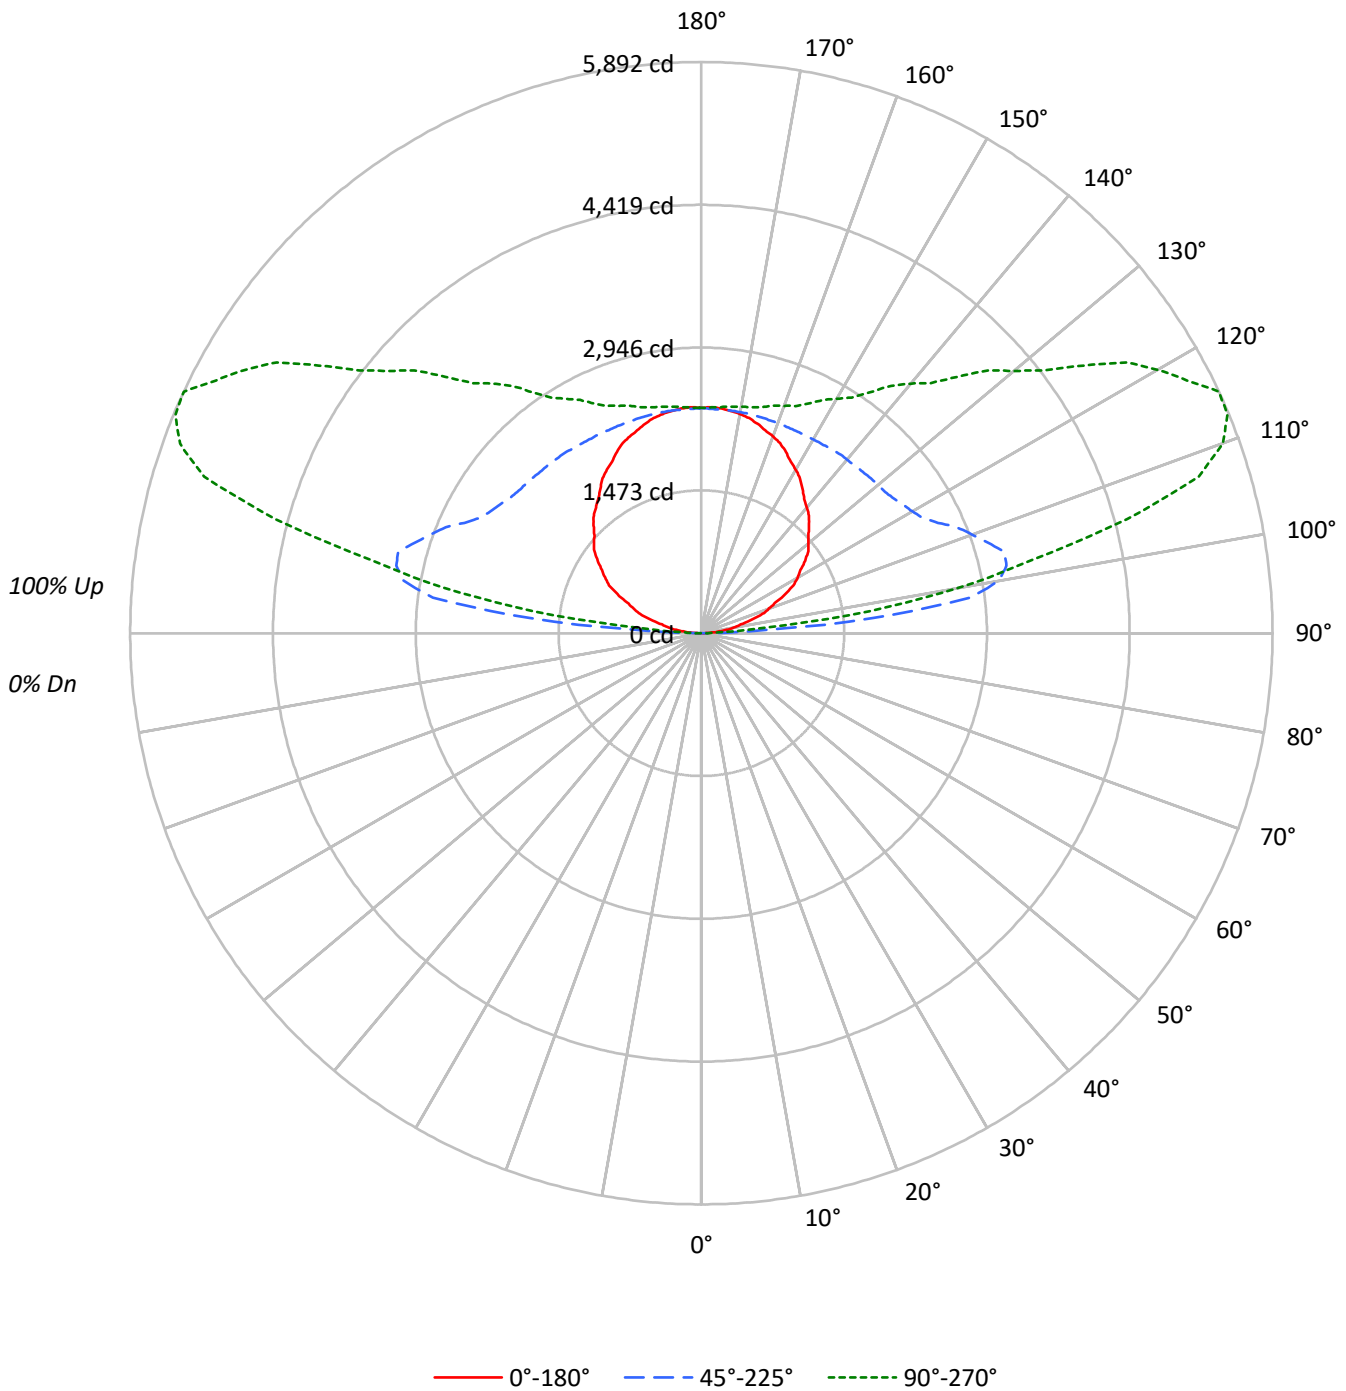



TEST NUMBER: P519743

CATALOG NUMBER: SQ4-125U-0D-835-1D-UNV-STD-W-12

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20								20				20				20
RC	80								50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	95	95	95	95	81	81	81	81	56	56	56	32	32	32	10	10	10
1	87	83	79	76	74	71	68	65	48	47	45	28	27	26	9	9	8
2	79	72	66	62	67	62	57	53	42	40	37	24	23	22	8	7	7
3	72	63	57	51	61	54	49	44	37	34	31	21	20	18	7	6	6
4	65	56	48	43	56	48	42	37	33	29	26	19	17	16	6	6	5
5	60	49	42	36	51	42	36	32	29	25	22	17	15	13	5	5	4
6	55	44	36	31	47	38	32	27	26	22	19	15	13	11	5	4	4
7	50	39	32	27	43	34	28	23	23	19	17	14	11	10	4	4	3
8	47	35	28	23	40	30	24	20	21	17	14	12	10	9	4	3	3
9	43	32	25	20	37	27	22	18	19	15	13	11	9	8	4	3	3
10	40	29	22	18	34	25	19	16	17	14	11	10	8	7	3	3	2

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
95°	5847	62870	22244
100°	6027	55193	47907
105°	6436	38473	54016
110°	6679	26745	51468
115°	6956	19620	42880
120°	7063	15455	33440
125°	6998	12980	25818
130°	6910	11385	20121
135°	6835	10233	16257
140°	6796	9387	13498
145°	6822	8723	11378
150°	6916	8198	9911
155°	7000	7813	8868
160°	7071	7545	8165
165°	7124	7359	7689
170°	7172	7228	7403
175°	7181	7145	7227



TEST NUMBER: P519743

CATALOG NUMBER: SQ4-125U-0D-835-1D-UNV-STD-W-12

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	0.0	0.0
10°-20°	0.0	0.0
20°-30°	0.0	0.0
30°-40°	0.0	0.0
40°-50°	0.0	0.0
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	1086.8	7.2
100°-110°	2927.6	19.5
110°-120°	3072.5	20.5
120°-130°	2493.2	16.6
130°-140°	1955.4	13.0
140°-150°	1501.2	10.0
150°-160°	1079.4	7.2
160°-170°	659.4	4.4
170°-180°	222.4	1.5
0°-30°	0.0	0.0
0°-40°	0.0	0.0
0°-60°	0.0	0.0
0°-90°	0.0	0.0
90°-120°	7086.9	47.3
90°-150°	13036.8	86.9
90°-180°	14998.0	100.0
0°-180°	14998.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
90°	6	18	36	38	38	
95°	166	591	1782	911	630	184
105°	542	843	3238	4844	4546	569
115°	956	1170	2696	5210	5892	941
125°	1305	1499	2421	4092	4815	1165
135°	1572	1754	2353	3301	3738	1213
145°	1817	1959	2323	2822	3031	1140
155°	2063	2138	2302	2532	2613	950
165°	2237	2264	2311	2403	2415	631
175°	2326	2323	2314	2347	2341	221
180°	2323	2323	2323	2323	2323	

TEST NUMBER: P519743

CATALOG NUMBER: SQ4-125U-0D-835-1D-UNV-STD-W-12

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
90°	5.9	17.5	35.5	38.5	38.5
92.5°	72.2	255.1	504.3	242.8	168.7
95°	165.7	591.1	1781.7	911.1	630.4
97.5°	264.6	676.7	2794.4	2334.5	1760.3
100°	340.3	710.8	3116.4	3260.6	2705.0
102.5°	413.7	758.7	3223.0	3954.3	3498.2
105°	541.6	842.6	3237.8	4843.9	4545.9
107.5°	662.3	930.9	3099.8	5301.1	5378.1
110°	742.8	997.5	2974.4	5443.1	5723.8
112.5°	828.1	1064.2	2853.6	5411.7	5873.0
115°	955.9	1170.1	2696.2	5209.5	5892.5
117.5°	1072.5	1273.4	2574.2	4886.9	5647.4
120°	1148.3	1342.2	2512.7	4655.4	5436.7
122.5°	1214.6	1406.2	2467.7	4418.6	5197.6
125°	1305.2	1499.1	2420.9	4091.8	4815.2
127.5°	1392.2	1583.2	2391.3	3803.5	4449.4
130°	1444.3	1635.3	2379.5	3638.4	4205.5
132.5°	1496.4	1685.0	2367.6	3492.9	4013.8
135°	1571.5	1753.8	2352.9	3301.0	3737.9
137.5°	1643.1	1817.9	2345.2	3138.2	3497.0
140°	1692.9	1860.7	2338.1	3038.0	3362.1
142.5°	1745.0	1901.2	2333.3	2944.5	3217.6
145°	1817.2	1959.0	2323.3	2822.2	3030.6
147.5°	1895.3	2018.6	2313.2	2719.4	2883.2
150°	1947.4	2054.5	2308.5	2654.9	2790.9
152.5°	1994.7	2087.9	2306.1	2602.2	2712.7
155°	2062.8	2138.1	2302.5	2532.3	2613.3
157.5°	2122.6	2181.1	2303.1	2483.1	2537.5
160°	2160.5	2209.7	2305.5	2454.4	2494.9
162.5°	2193.6	2233.6	2307.9	2430.5	2459.4
165°	2237.4	2263.5	2311.4	2403.4	2415.0
167.5°	2272.9	2288.0	2314.4	2382.6	2387.2
170°	2296.6	2302.4	2314.4	2370.6	2370.6
172.5°	2310.8	2312.0	2316.7	2358.8	2358.8
175°	2326.2	2323.3	2314.4	2346.8	2341.0
177.5°	2332.7	2328.1	2316.2	2335.0	2330.4
180°	2323.3	2323.3	2323.3	2323.3	2323.3

(END OF REPORT)