

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: CORELITE

Report Number: P519660

Luminaire Tested: **SQ4-025U-0D-935-1D-UNV-STD-W-4**

Issue Date: 4/29/2021

Test Information

Test Method: LM-79-2019
Report Number: P519660
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-536-32)
Test Lab: INNOVATION CENTER
Issue Date: 4/29/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: CORELITE
Catalog Number: SQ4-025U-0D-935-1D-UNV-STD-W-4
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE
UPLIGHT 250 LUMENS PER FOOT
Light Source: 3500K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 839.3 lumens
Efficiency: N/A
Efficacy: 142.2 lumens/watt
N/A
Luminous Opening: Rectangular (W 0.29' x L: 4' x H: 0')
CIE Type: Indirect

Input Watts (W): 5.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P519660
CATALOG NUMBER: SQ4-025U-0D-935-1D-UNV-STD-W-4

Luminous Intensity Polar Plot

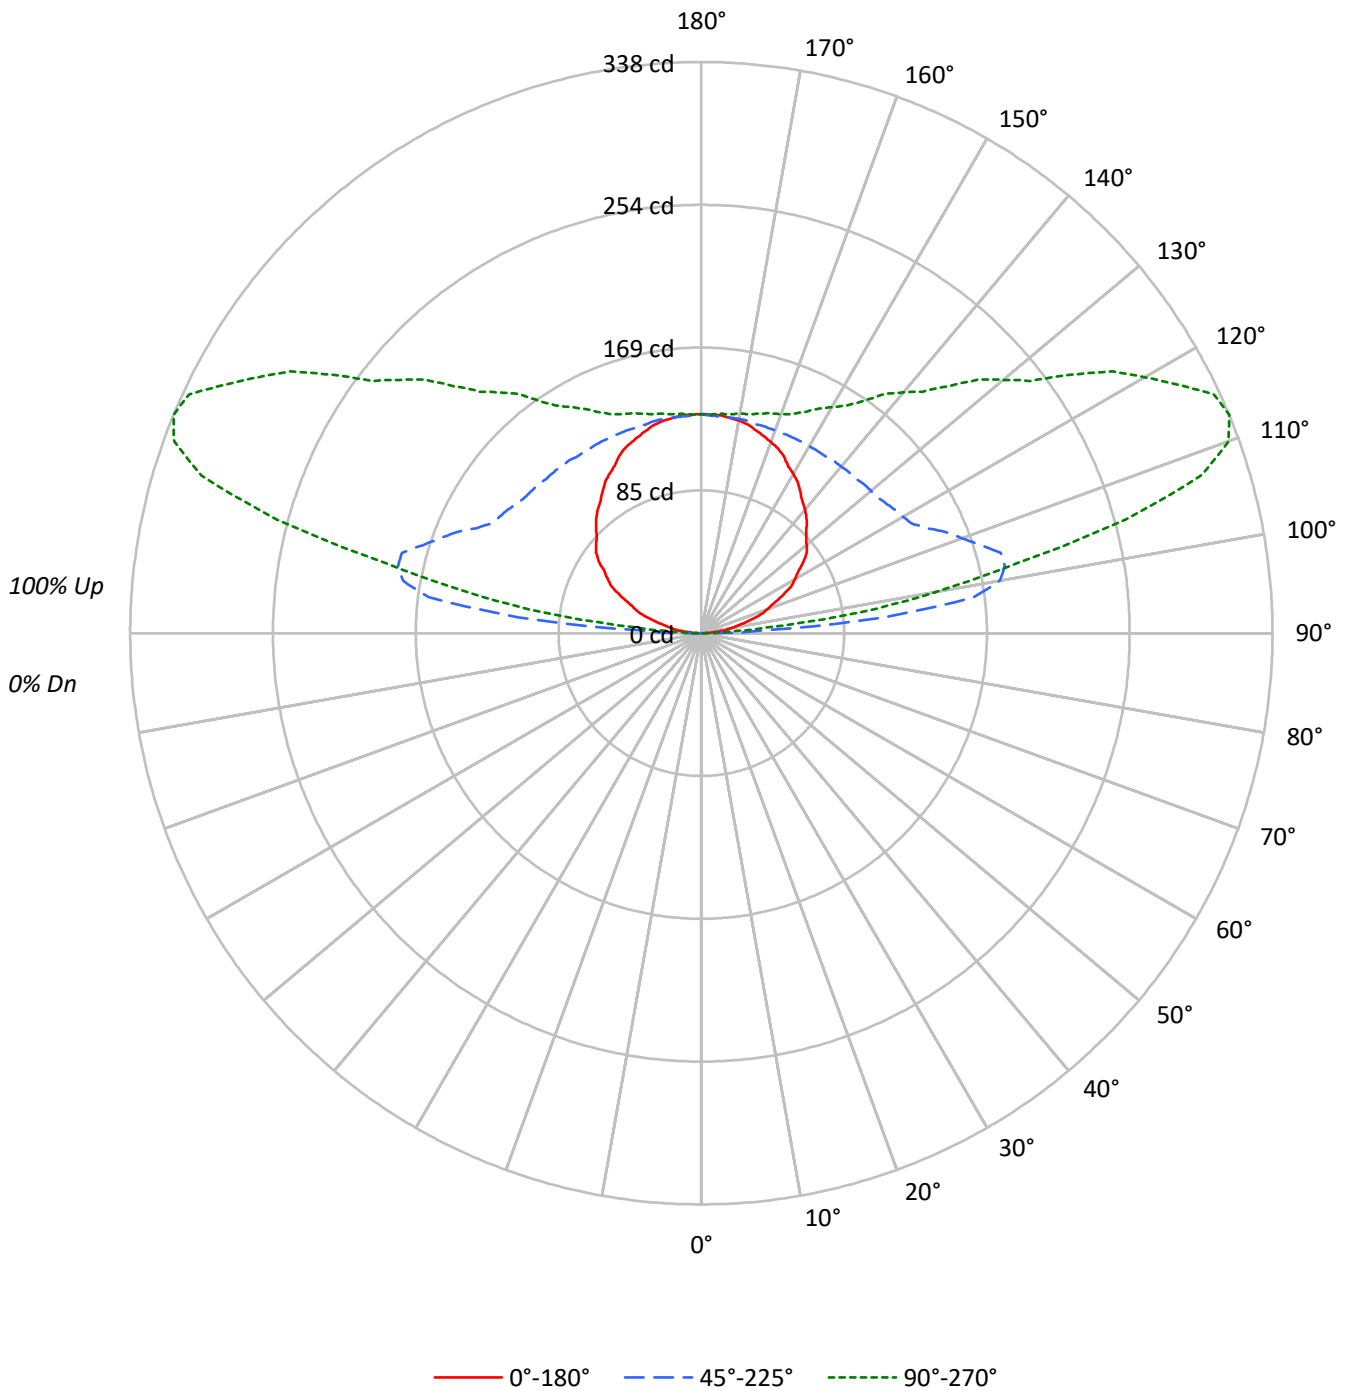



TEST NUMBER: P519660

CATALOG NUMBER: SQ4-025U-0D-935-1D-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20								20				20				20				20
RC	80								50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10				0
RCR																					
0	95	95	95	95	81	81	81	81	56	56	56	32	32	32	10	10	10				0
1	87	83	79	76	74	71	68	65	48	47	45	28	27	26	9	9	8				0
2	79	72	66	62	67	62	57	53	42	40	37	24	23	22	8	7	7				0
3	72	63	57	51	61	54	49	44	37	34	31	21	20	18	7	6	6				0
4	65	56	48	43	56	48	42	37	33	29	26	19	17	16	6	6	5				0
5	60	49	42	36	51	42	36	32	29	25	22	17	15	13	5	5	4				0
6	55	44	36	31	47	38	32	27	26	22	19	15	13	11	5	4	4				0
7	50	39	32	27	43	34	28	23	23	19	17	14	11	10	4	4	3				0
8	47	35	28	23	40	30	24	20	21	17	14	12	10	9	4	3	3				0
9	43	32	25	20	37	27	22	18	19	15	13	11	9	8	4	3	3				0
10	40	29	22	18	34	25	19	16	17	14	11	10	8	7	3	3	2				0

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
95°	879	11507	4044
100°	1015	9526	7497
105°	1066	6538	9261
110°	1119	4432	8956
115°	1159	3207	7302
120°	1179	2543	5591
125°	1189	2149	4285
130°	1167	1882	3347
135°	1148	1690	2697
140°	1150	1550	2239
145°	1150	1439	1889
150°	1158	1362	1645
155°	1175	1301	1470
160°	1182	1255	1353
165°	1189	1221	1285
170°	1197	1206	1237
175°	1199	1192	1207



TEST NUMBER: P519660

CATALOG NUMBER: SQ4-025U-0D-935-1D-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	0.0	0.0
10°-20°	0.0	0.0
20°-30°	0.0	0.0
30°-40°	0.0	0.0
40°-50°	0.0	0.0
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	63.1	7.5
100°-110°	165.9	19.8
110°-120°	172.0	20.5
120°-130°	138.0	16.4
130°-140°	108.3	12.9
140°-150°	83.1	9.9
150°-160°	59.9	7.1
160°-170°	36.6	4.4
170°-180°	12.4	1.5
0°-30°	0.0	0.0
0°-40°	0.0	0.0
0°-60°	0.0	0.0
0°-90°	0.0	0.0
90°-120°	401.1	47.8
90°-150°	730.4	87.0
90°-180°	839.0	100.0
0°-180°	839.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
90°	1	2	7	3	3	
95°	8	33	109	56	38	10
105°	30	45	183	278	260	32
115°	53	64	147	293	334	52
125°	74	83	134	226	266	66
135°	88	97	130	182	207	68
145°	102	109	128	156	168	64
155°	115	119	128	140	144	53
165°	124	126	128	133	134	35
175°	130	130	129	130	130	12
180°	130	130	130	130	130	



TEST NUMBER: P519660

CATALOG NUMBER: SQ4-025U-0D-935-1D-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
90°	0.8	2.5	6.6	3.3	3.3
92.5°	3.5	16.8	37.2	16.5	10.6
95°	8.3	32.6	108.7	56.0	38.2
97.5°	14.4	35.9	162.7	129.4	95.3
100°	19.1	38.6	179.3	181.7	141.1
102.5°	23.1	41.3	183.9	226.3	191.6
105°	29.9	45.3	183.4	278.5	259.8
107.5°	36.9	51.1	173.0	305.6	310.1
110°	41.5	54.5	164.3	312.5	332.0
112.5°	46.2	58.5	156.4	308.1	338.0
115°	53.1	64.5	146.9	293.1	334.5
117.5°	59.9	70.3	140.4	272.3	318.2
120°	63.9	73.7	137.8	258.3	303.0
122.5°	67.9	77.6	135.8	244.4	288.4
125°	73.9	82.8	133.6	225.9	266.4
127.5°	78.7	87.8	131.8	210.9	245.2
130°	81.3	91.1	131.1	201.6	233.2
132.5°	84.0	93.7	130.5	193.5	222.0
135°	88.0	96.9	129.5	182.3	206.7
137.5°	92.1	100.9	129.3	173.9	193.9
140°	95.5	103.6	128.7	167.3	185.9
142.5°	98.1	105.6	128.7	162.6	178.6
145°	102.1	108.6	127.8	155.5	167.7
147.5°	106.1	112.4	127.8	149.6	159.7
150°	108.7	114.4	127.8	146.3	154.4
152.5°	111.4	115.8	127.8	143.6	149.7
155°	115.4	118.6	127.8	140.4	144.4
157.5°	118.4	121.4	127.8	137.5	140.4
160°	120.4	122.8	127.8	136.2	137.8
162.5°	122.3	124.1	127.8	134.8	136.5
165°	124.5	126.1	127.8	132.8	134.5
167.5°	126.5	127.3	128.7	132.0	132.6
170°	127.8	128.6	128.7	132.0	132.0
172.5°	128.5	128.7	128.7	131.3	130.6
175°	129.5	129.5	128.7	130.3	130.3
177.5°	129.5	129.5	128.8	130.1	129.5
180°	129.5	129.5	129.5	129.5	129.5

(END OF REPORT)