

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P937270

Luminaire Tested: SQ4-FB-075U-100D-935-1D-UNV-STD-W-4

Issue Date: 12/17/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P937270  
REPORT IS A COMBINATION OF REPORTS P933503 AND P933786  
Test Lab: INNOVATION CENTER  
Issue Date: 12/17/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ4-FB-075U-100D-935-1D-UNV-STD-W-4  
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5261.1 lumens  
Efficiency: N/A  
Efficacy: 102.8 lumens/watt  
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33  
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 4' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 51.2  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P937270  
CATALOG NUMBER: SQ4-FB-075U-100D-935-1D-UNV-STD-W-4

### Luminous Intensity Polar Plot

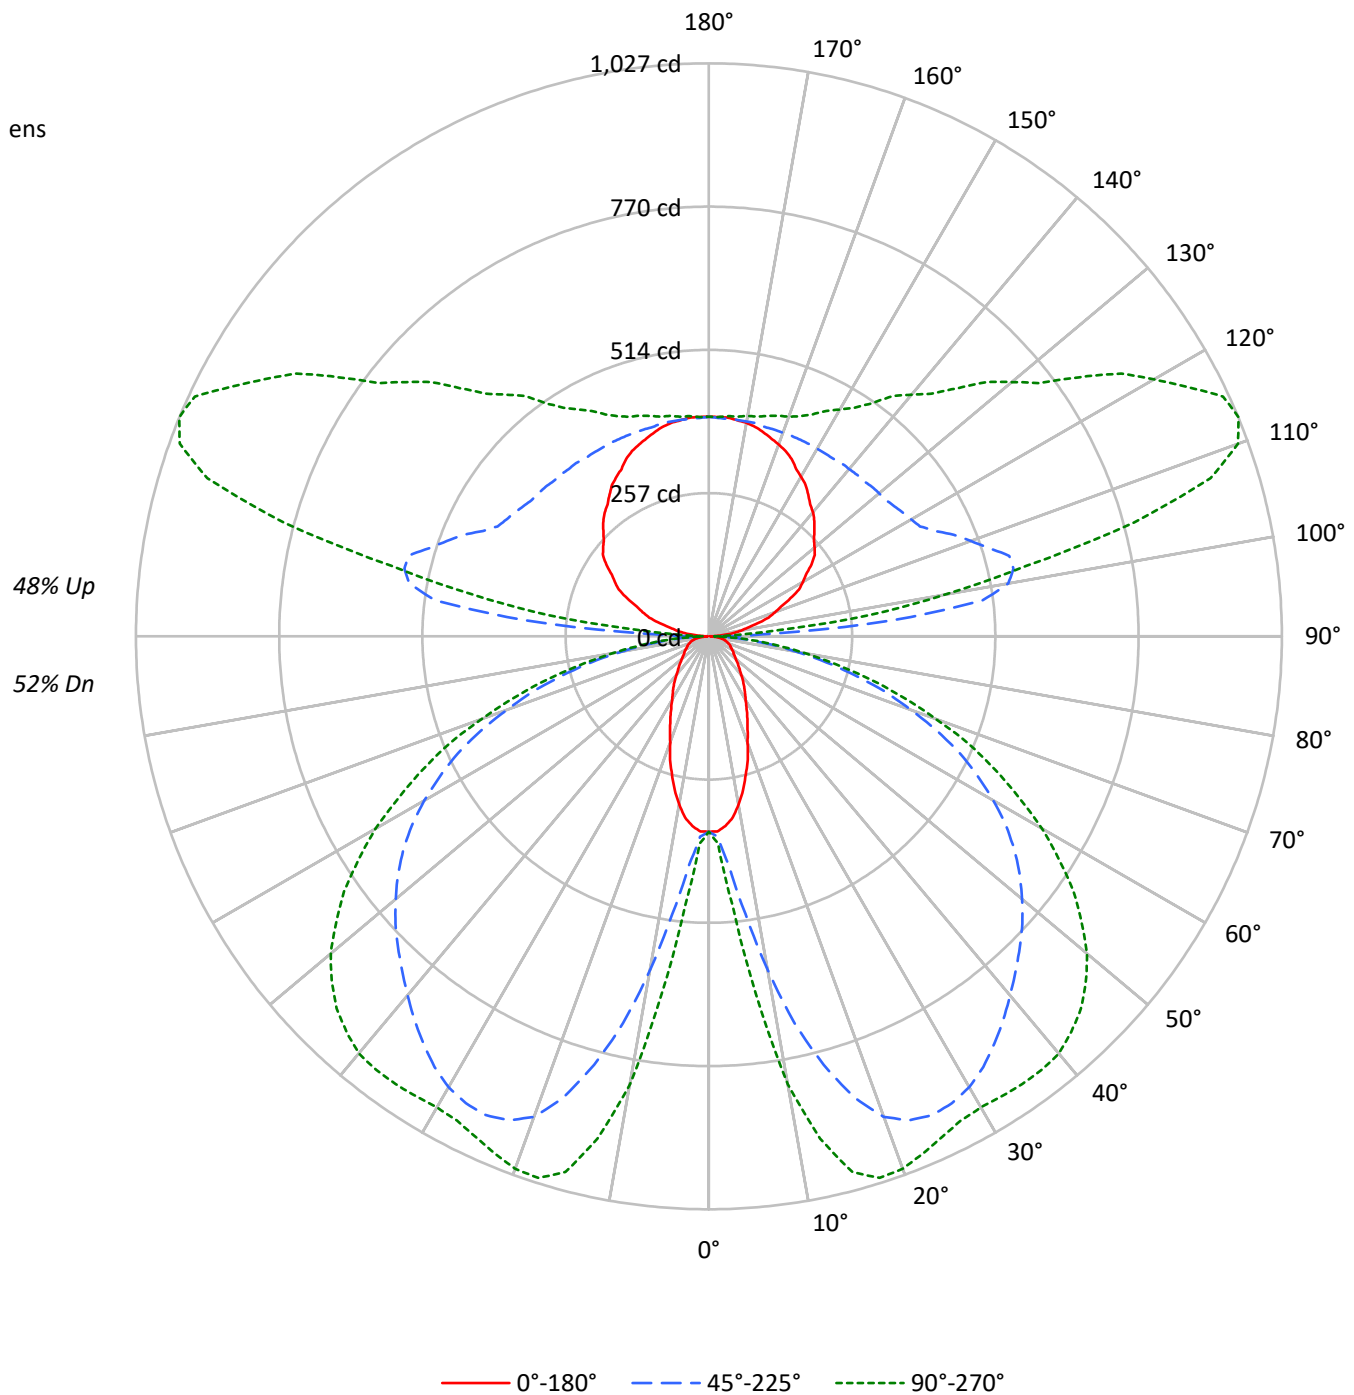



TEST NUMBER: P937270

CATALOG NUMBER: SQ4-FB-075U-100D-935-1D-UNV-STD-W-4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	108	108	108	108	99	99	99	99	84	84	84	70	70	70	58	58	58	58	58	58	52
1	98	93	89	85	90	86	82	79	73	70	68	61	59	57	50	49	47	50	49	47	42
2	88	80	74	69	81	74	69	64	63	59	55	53	50	47	43	41	39	43	41	39	34
3	80	70	62	56	74	65	58	53	55	50	46	46	42	39	38	35	32	38	35	32	28
4	73	62	53	47	67	57	50	44	49	43	38	41	36	33	33	30	27	33	30	27	24
5	67	55	46	40	61	51	43	37	43	37	33	36	32	28	30	26	23	30	26	23	20
6	61	49	40	34	56	45	38	32	39	33	28	32	28	24	27	23	20	27	23	20	17
7	56	44	35	30	52	41	33	28	35	29	24	29	25	21	24	20	18	24	20	18	15
8	52	39	31	26	48	37	29	24	31	26	21	27	22	19	22	18	16	22	18	16	13
9	49	36	28	23	45	33	26	22	29	23	19	24	20	16	20	17	14	20	17	14	12
10	45	33	25	20	42	31	24	19	26	21	17	22	18	15	19	15	12	19	15	12	10

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3249	3249	3249
5°	3170	3752	4367
10°	2872	5465	7239
15°	2438	7135	8741
20°	1983	8263	8909
25°	1652	8639	8729
30°	1391	8688	8711
35°	1228	8537	8938
40°	1069	8342	9170
45°	965	8197	9206
50°	883	8066	9054
55°	843	7876	8652
60°	861	7521	8018
65°	892	6984	7147
70°	942	6078	6038
75°	1033	4944	4713
80°	1105	3415	3175
85°	927	1804	1625

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 45°  
 Luminance: 9206 cd/sqm



TEST NUMBER: P937270

CATALOG NUMBER: SQ4-FB-075U-100D-935-1D-UNV-STD-W-4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	45.3	0.9
10°-20°	200.7	3.8
20°-30°	351.1	6.7
30°-40°	452.0	8.6
40°-50°	504.8	9.6
50°-60°	483.5	9.2
60°-70°	383.2	7.3
70°-80°	225.3	4.3
80°-90°	64.1	1.2
90°-100°	191.8	3.6
100°-110°	504.3	9.6
110°-120°	522.9	9.9
120°-130°	419.5	8.0
130°-140°	329.1	6.3
140°-150°	252.6	4.8
150°-160°	181.9	3.5
160°-170°	111.3	2.1
170°-180°	37.6	0.7
0°-30°	597.1	11.3
0°-40°	1049.1	19.9
0°-60°	2037.4	38.7
0°-90°	2710.0	51.5
90°-120°	1219.1	23.2
90°-150°	2220.3	42.2
90°-180°	2551.0	48.5
0°-180°	5261.1	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	350	350	350	350	350	
5°	341	366	412	466	483	31
15°	256	472	795	964	994	71
25°	163	535	947	988	990	75
35°	110	511	892	942	980	69
45°	75	408	788	903	943	58
55°	54	259	669	777	798	49
65°	43	137	496	558	566	42
75°	32	84	272	300	301	33
85°	11	26	68	74	75	12
90°	3	7	20	10	10	3
95°	25	99	330	170	116	28
105°	91	138	558	846	790	96
115°	161	196	447	891	1017	159
125°	224	252	406	686	810	199
135°	268	294	394	554	628	207
145°	310	330	388	473	510	194
155°	351	360	388	426	439	161
165°	378	384	388	404	409	107
175°	394	394	391	396	396	37
180°	394	394	394	394	394	



TEST NUMBER: P937270

CATALOG NUMBER: SQ4-FB-075U-100D-935-1D-UNV-STD-W-4

**CANDELA DISTRIBUTION (FULL):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	350.1	350.1	350.1	350.1	350.1	350.1	350.1	350.1	350.1	350.1	350.1
2.5°	350.1	350.1	352.4	353.5	355.7	356.9	359.1	361.3	368.1	369.3	371.5
5°	341.1	345.7	360.2	365.8	381.6	403.0	412.0	426.7	457.1	466.0	471.7
7.5°	327.6	337.7	373.8	382.8	422.2	478.5	502.1	533.6	582.0	605.7	624.8
10°	306.2	327.6	391.7	413.1	477.3	562.9	606.8	650.7	723.9	756.5	768.9
12.5°	282.6	317.5	410.9	440.1	532.5	657.5	710.4	758.8	842.1	886.0	892.7
15°	255.5	302.8	428.9	471.7	591.0	736.3	794.8	854.5	932.2	963.7	971.5
17.5°	231.9	291.6	445.8	490.8	636.1	807.2	866.8	916.4	979.5	1000.8	1006.5
20°	202.6	273.6	457.1	515.6	683.4	859.0	916.4	954.7	997.4	1011.0	1013.2
22.5°	181.2	254.4	463.8	524.6	714.8	890.5	938.9	969.3	998.5	1003.1	1004.2
25°	163.2	233.0	462.7	534.7	741.9	909.6	946.7	969.3	986.2	988.4	988.4
27.5°	146.4	209.4	458.2	537.0	762.1	914.1	943.4	959.2	967.0	971.5	971.5
30°	131.7	186.8	447.0	532.5	771.1	909.6	933.3	941.1	949.0	955.8	959.2
32.5°	120.5	165.5	430.1	523.5	772.3	898.3	915.2	919.7	931.0	946.7	952.5
35°	110.3	144.1	410.9	511.1	765.5	880.4	891.6	896.1	918.6	942.3	950.2
37.5°	100.2	128.3	386.1	489.7	755.4	859.0	866.8	874.7	909.6	937.8	946.7
40°	90.1	114.8	356.9	466.0	739.6	833.1	839.8	852.3	898.3	931.0	940.0
42.5°	82.2	103.6	325.4	441.3	719.3	803.8	813.9	832.0	884.9	919.7	929.9
45°	75.4	92.3	291.6	407.5	693.4	773.4	788.0	812.8	869.1	902.9	911.9
47.5°	68.7	84.4	256.7	372.7	665.3	743.0	762.1	790.3	847.7	880.4	888.2
50°	63.0	76.6	221.8	335.5	634.9	710.4	732.9	762.1	820.7	851.1	861.2
52.5°	58.5	69.8	189.1	298.4	600.1	676.6	702.5	732.9	788.0	817.3	824.1
55°	54.0	64.2	161.0	258.9	564.0	640.5	668.7	698.0	752.1	776.8	781.3
57.5°	51.8	59.6	137.3	221.8	525.8	600.1	631.6	658.6	709.2	728.4	732.9
60°	48.4	56.3	119.4	190.3	484.1	561.7	588.8	615.8	658.6	674.4	677.7
62.5°	45.1	54.0	105.8	159.8	441.3	516.7	543.7	568.5	604.6	615.8	620.3
65°	42.8	51.8	95.7	137.3	397.4	469.5	496.5	517.8	547.2	558.4	560.6
67.5°	40.6	49.5	87.8	118.2	353.5	422.2	442.4	462.7	485.2	496.5	497.6
70°	37.1	47.3	81.0	104.7	308.4	368.1	385.0	406.4	424.4	430.1	433.4
72.5°	34.9	43.9	76.6	94.6	262.3	316.3	332.1	344.5	360.2	365.8	365.8
75°	31.5	39.4	72.1	84.4	215.0	258.9	272.5	284.8	297.2	299.5	296.1
77.5°	28.1	34.9	61.9	70.9	167.8	204.9	216.2	222.9	233.0	235.3	236.4
80°	23.6	30.4	48.4	55.1	121.6	150.9	158.7	164.4	173.4	173.4	175.6
82.5°	18.0	23.6	34.9	39.4	82.2	103.6	110.3	113.7	119.4	119.4	119.4
85°	11.2	14.7	22.5	25.9	49.5	63.0	67.6	68.7	73.2	74.3	74.3
87.5°	5.6	7.8	14.7	15.8	25.9	32.6	32.6	34.9	34.9	33.7	32.6
90°	2.6	4.8	6.9	7.4	11.7	17.3	20.1	17.9	13.4	10.1	10.1
92.5°	10.6	28.5	46.4	50.9	71.7	99.3	113.1	99.1	71.1	50.2	48.2
95°	25.4	58.3	91.2	99.3	176.4	279.0	330.4	294.8	223.6	170.3	164.3
97.5°	43.9	72.8	101.8	109.1	237.5	408.8	494.4	471.9	427.0	393.3	381.8
100°	58.1	84.3	110.7	117.2	259.8	449.9	544.9	546.5	549.8	552.3	538.5
102.5°	70.3	94.8	119.3	125.4	270.0	462.8	559.2	587.8	645.0	688.0	676.2
105°	90.8	111.6	132.4	137.6	277.6	464.3	557.5	621.8	750.2	846.5	840.2
107.5°	112.0	131.4	150.7	155.6	279.0	443.6	525.9	615.4	794.5	928.9	930.4
110°	126.3	143.7	161.3	165.6	276.9	425.2	499.4	599.6	799.8	950.0	956.5



TEST NUMBER: P937270

CATALOG NUMBER: SQ4-FB-075U-100D-935-1D-UNV-STD-W-4

**CANDELA DISTRIBUTION (continued):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	140.2	156.9	173.6	177.7	277.0	409.3	475.4	577.9	782.8	936.5	946.7
115°	161.4	176.7	192.1	196.0	279.5	390.9	446.6	545.4	742.8	890.9	904.8
117.5°	182.2	196.2	210.2	213.7	284.7	379.4	426.8	515.9	694.0	827.7	843.2
120°	194.4	207.5	220.7	224.0	288.9	375.6	418.8	500.3	663.1	785.2	800.3
122.5°	206.3	219.6	232.8	236.1	295.0	373.5	412.8	486.1	632.7	742.7	757.6
125°	224.5	236.6	248.7	251.7	303.2	371.9	406.2	468.5	593.1	686.5	700.2
127.5°	239.3	251.5	263.7	266.8	311.4	371.0	400.7	454.2	561.1	641.3	652.9
130°	247.3	260.4	273.5	276.8	317.4	371.5	398.6	446.2	541.4	612.8	623.4
132.5°	255.4	268.6	281.7	285.0	322.2	371.9	396.7	439.3	524.6	588.5	598.0
135°	267.5	279.5	291.5	294.5	327.5	371.6	393.5	429.2	500.6	554.1	562.4
137.5°	280.0	291.8	303.7	306.6	335.4	373.9	393.0	423.2	483.5	528.8	535.5
140°	290.3	301.2	312.1	314.8	340.3	374.2	391.2	417.2	469.3	508.4	514.7
142.5°	298.2	308.3	318.3	320.9	344.3	375.6	391.2	414.1	459.8	494.2	499.6
145°	310.3	319.2	327.9	330.2	349.6	375.6	388.5	407.3	444.7	472.8	476.9
147.5°	322.5	331.0	339.6	341.7	357.3	378.1	388.5	403.3	432.7	454.8	458.2
150°	330.4	338.2	345.9	347.9	361.4	379.5	388.5	401.0	425.8	444.5	447.2
152.5°	338.6	344.5	350.3	351.8	364.1	380.3	388.5	399.2	420.4	436.3	438.4
155°	350.8	355.1	359.4	360.5	369.9	382.3	388.5	396.9	413.8	426.5	427.9
157.5°	359.7	364.0	368.2	369.3	375.6	384.3	388.5	395.1	408.2	418.1	419.0
160°	365.8	369.1	372.3	373.2	378.3	385.1	388.5	394.1	405.5	413.9	414.4
162.5°	371.9	374.4	376.8	377.4	381.1	386.0	388.5	393.3	402.7	409.9	410.4
165°	378.5	380.7	382.9	383.5	385.2	387.4	388.5	391.9	398.7	403.8	404.4
167.5°	384.5	385.5	386.6	386.9	388.3	390.2	391.2	393.4	397.9	401.2	401.5
170°	388.5	389.5	390.6	390.9	391.0	391.1	391.2	393.4	397.9	401.2	401.2
172.5°	390.6	390.9	391.1	391.2	391.2	391.2	391.2	392.9	396.4	399.1	398.9
175°	393.5	393.5	393.5	393.5	392.8	391.7	391.2	392.3	394.5	396.2	396.2
177.5°	393.5	393.5	393.5	393.5	392.9	392.1	391.7	392.5	394.3	395.7	395.4
180°	393.5	393.5	393.5	393.5	393.5	393.5	393.5	393.5	393.5	393.5	393.5



TEST NUMBER: P937270

CATALOG NUMBER: SQ4-FB-075U-100D-935-1D-UNV-STD-W-4

**CANDELA DISTRIBUTION (continued):**

	80°	90°
0°	350.1	350.1
2.5°	373.8	371.5
5°	480.7	483.0
7.5°	647.3	646.2
10°	805.0	815.0
12.5°	919.7	922.0
15°	989.6	994.0
17.5°	1016.6	1017.7
20°	1017.7	1015.4
22.5°	1005.4	1003.1
25°	990.7	989.6
27.5°	977.2	978.3
30°	971.5	974.9
32.5°	971.5	977.2
35°	973.8	979.5
37.5°	972.6	979.5
40°	968.2	976.1
42.5°	955.8	961.4
45°	936.7	943.4
47.5°	911.9	916.4
50°	880.4	884.9
52.5°	840.9	842.1
55°	793.6	798.2
57.5°	743.0	744.1
60°	686.7	690.1
62.5°	627.1	627.1
65°	564.0	566.2
67.5°	498.8	504.4
70°	432.3	433.4
72.5°	367.0	367.0
75°	299.5	300.6
77.5°	235.3	235.3
80°	174.5	175.6
82.5°	120.5	122.7
85°	75.4	75.4
87.5°	34.9	31.5
90°	10.1	10.1
92.5°	40.2	32.2
95°	140.2	116.0
97.5°	335.8	289.8
100°	483.8	428.9
102.5°	629.3	582.3
105°	814.9	789.7
107.5°	936.5	942.7
110°	982.9	1009.2





TEST NUMBER: P937270

CATALOG NUMBER: SQ4-FB-075U-100D-935-1D-UNV-STD-W-4

**CANDELA DISTRIBUTION (continued):**

	80°	90°
112.5°	987.0	1027.4
115°	960.9	1016.9
117.5°	905.3	967.4
120°	860.6	920.9
122.5°	817.1	876.6
125°	755.0	809.7
127.5°	699.1	745.3
130°	666.2	708.9
132.5°	636.3	674.5
135°	595.4	628.4
137.5°	562.5	589.5
140°	540.0	565.2
142.5°	521.3	543.0
145°	493.3	509.8
147.5°	471.8	485.5
150°	458.3	469.4
152.5°	446.7	455.1
155°	433.4	439.0
157.5°	422.9	426.8
160°	416.6	418.8
162.5°	412.5	414.7
165°	406.7	408.9
167.5°	402.4	403.3
170°	401.2	401.2
172.5°	398.1	397.2
175°	396.2	396.2
177.5°	394.5	393.5
180°	393.5	393.5



TEST NUMBER: P937270  
 CATALOG NUMBER: SQ4-FB-075U-100D-935-1D-UNV-STD-W-4

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.22	6.13	6.16	7.09	8.34	18.36	19.28	19.30	20.23	21.48
	3H	5.93	6.75	6.88	7.72	8.99	20.19	21.01	21.14	21.98	23.25
	4H	6.23	7.01	7.19	7.98	9.26	20.83	21.61	21.79	22.58	23.86
	6H	6.49	7.20	7.46	8.18	9.47	21.25	21.97	22.22	22.94	24.24
	8H	6.55	7.24	7.53	8.24	9.52	21.36	22.05	22.34	23.04	24.33
	12H	6.57	7.23	7.56	8.22	9.53	21.43	22.08	22.41	23.07	24.38
4H	2H	12.42	13.20	13.39	14.17	15.45	18.64	19.42	19.61	20.40	21.67
	3H	13.99	14.65	14.97	15.65	16.94	20.68	21.33	21.66	22.33	23.63
	4H	14.09	14.69	15.08	15.68	17.00	21.44	22.04	22.42	23.03	24.35
	6H	14.11	14.62	15.10	15.64	16.95	21.97	22.48	22.97	23.50	24.82
	8H	14.08	14.57	15.08	15.58	16.91	22.12	22.61	23.13	23.62	24.95
	12H	14.04	14.48	15.06	15.51	16.84	22.21	22.65	23.23	23.68	25.01
8H	4H	15.53	16.01	16.53	17.03	18.35	21.50	21.99	22.50	23.00	24.33
	6H	15.78	16.18	16.80	17.23	18.56	22.12	22.52	23.15	23.58	24.90
	8H	15.79	16.15	16.83	17.19	18.53	22.34	22.69	23.37	23.73	25.07
	12H	15.77	16.08	16.80	17.11	18.50	22.47	22.79	23.51	23.82	25.21
12H	4H	15.67	16.11	16.69	17.14	18.47	21.46	21.90	22.48	22.92	24.26
	6H	16.03	16.39	17.06	17.42	18.77	22.11	22.46	23.14	23.50	24.85
	8H	16.10	16.41	17.14	17.45	18.84	22.33	22.64	23.37	23.68	25.07