

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P936469

Luminaire Tested: SQ4-FB-025U-100D-935-1D-UNV-STD-W-12

Issue Date: 12/17/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P936469  
REPORT IS A COMBINATION OF REPORTS P933431 AND P933786  
Test Lab: INNOVATION CENTER  
Issue Date: 12/17/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ4-FB-025U-100D-935-1D-UNV-STD-W-12  
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 10598.9 lumens  
Efficiency: N/A  
Efficacy: 91.1 lumens/watt  
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33  
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 12' x H: 0.1')  
CIE Type: Semi-Direct  
  
Input Watts (W): 116.4  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P936469  
CATALOG NUMBER: SQ4-FB-025U-100D-935-1D-UNV-STD-W-12

### Luminous Intensity Polar Plot

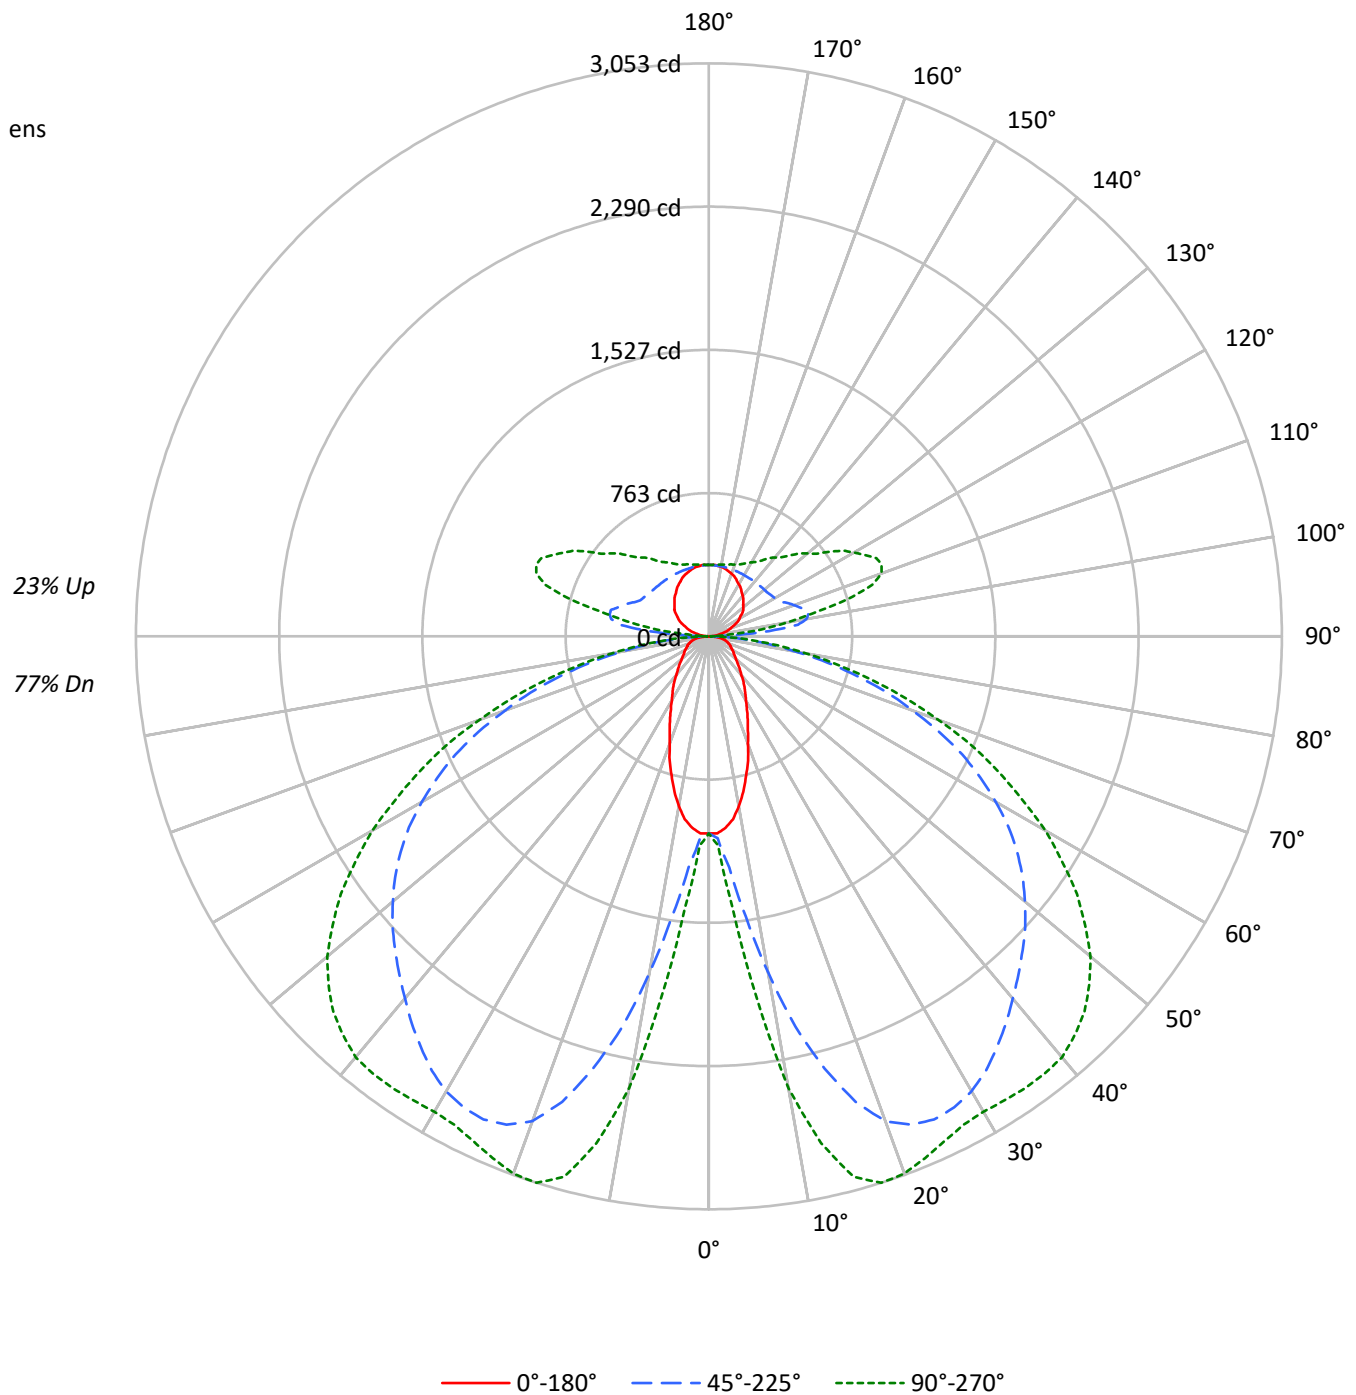



TEST NUMBER: P936469

CATALOG NUMBER: SQ4-FB-025U-100D-935-1D-UNV-STD-W-12

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	113	113	113	113	108	108	108	108	98	98	98	89	89	89	81	81	81	77				77
1	103	98	94	90	98	94	90	86	85	82	79	77	75	73	70	68	66	63				63
2	93	85	78	72	88	81	75	69	73	68	64	67	63	59	61	57	55	51				51
3	84	74	65	59	80	70	63	57	64	58	53	58	53	49	53	49	45	42				42
4	77	65	56	49	73	62	54	47	56	50	44	51	46	41	47	42	38	35				35
5	70	57	48	42	66	55	46	40	50	43	38	46	40	35	41	37	33	30				30
6	64	51	42	36	61	49	41	35	45	38	32	41	35	30	37	32	28	26				26
7	59	46	37	31	56	44	36	30	40	33	28	37	31	27	34	29	25	22				22
8	55	42	33	27	52	40	32	26	37	30	25	34	28	23	31	26	22	20				20
9	51	38	30	24	49	36	29	23	33	27	22	31	25	21	28	23	19	17				17
10	48	35	27	21	45	33	26	21	31	24	20	28	23	19	26	21	17	16				16

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3249	3249	3249
5°	3175	3756	4366
10°	2881	5476	7239
15°	2449	7156	8741
20°	1995	8294	8908
25°	1664	8682	8727
30°	1404	8739	8711
35°	1242	8596	8936
40°	1083	8410	9169
45°	982	8274	9205
50°	901	8152	9052
55°	864	7973	8651
60°	885	7627	8017
65°	923	7098	7147
70°	985	6195	6038
75°	1096	5055	4712
80°	1206	3510	3175
85°	1092	1865	1625

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 45°  
 Luminance: 9205 cd/sqm



TEST NUMBER: P936469

CATALOG NUMBER: SQ4-FB-025U-100D-935-1D-UNV-STD-W-12

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	135.9	1.3
10°-20°	602.1	5.7
20°-30°	1053.2	9.9
30°-40°	1355.8	12.8
40°-50°	1514.3	14.3
50°-60°	1450.4	13.7
60°-70°	1149.4	10.8
70°-80°	675.9	6.4
80°-90°	189.2	1.8
90°-100°	185.9	1.8
100°-110°	488.8	4.6
110°-120°	506.9	4.8
120°-130°	406.6	3.8
130°-140°	319.0	3.0
140°-150°	244.9	2.3
150°-160°	176.3	1.7
160°-170°	107.9	1.0
170°-180°	36.5	0.3
0°-30°	1791.1	16.9
0°-40°	3146.9	29.7
0°-60°	6111.6	57.7
0°-90°	8126.1	76.7
90°-120°	1181.6	11.1
90°-150°	2152.0	20.3
90°-180°	2473.0	23.3
0°-180°	10598.9	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1050	1050	1050	1050	1050	
5°	1023	1098	1236	1398	1449	94
15°	766	1415	2384	2891	2982	213
25°	490	1604	2840	2965	2968	226
35°	331	1533	2675	2826	2938	207
45°	226	1222	2364	2708	2830	175
55°	162	777	2006	2330	2394	148
65°	128	412	1489	1675	1699	127
75°	95	253	817	898	902	99
85°	34	78	203	223	226	36
90°	3	7	19	10	10	4
95°	24	96	320	165	112	27
105°	88	133	540	820	765	93
115°	156	190	433	864	986	154
125°	218	244	394	665	785	193
135°	259	285	381	537	609	201
145°	301	320	377	458	494	188
155°	340	349	377	414	426	156
165°	367	372	377	391	396	104
175°	381	381	379	384	384	36
180°	381	381	381	381	381	



TEST NUMBER: P936469  
 CATALOG NUMBER: SQ4-FB-025U-100D-935-1D-UNV-STD-W-12

**CANDELA DISTRIBUTION (FULL):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	1050.3	1050.3	1050.3	1050.3	1050.3	1050.3	1050.3	1050.3	1050.3	1050.3	1050.3
2.5°	1050.3	1050.3	1057.0	1060.4	1067.1	1070.5	1077.3	1084.0	1104.3	1107.7	1114.4
5°	1023.3	1036.7	1080.7	1097.5	1144.8	1209.0	1236.0	1279.9	1371.0	1398.0	1414.9
7.5°	982.7	1013.1	1121.1	1148.2	1266.3	1435.2	1506.2	1600.7	1745.9	1816.8	1874.2
10°	918.5	982.7	1175.2	1239.3	1431.9	1688.5	1820.2	1951.9	2171.4	2269.3	2306.4
12.5°	847.7	952.3	1232.6	1320.4	1597.3	1972.1	2130.9	2276.1	2526.0	2657.7	2677.9
15°	766.5	908.4	1286.6	1414.9	1772.9	2208.6	2384.2	2563.2	2796.2	2890.7	2914.4
17.5°	695.7	874.7	1337.3	1472.3	1908.0	2421.3	2600.3	2748.9	2938.0	3002.1	3019.1
20°	607.8	820.6	1371.0	1546.6	2049.8	2576.6	2748.9	2863.7	2992.0	3032.5	3039.3
22.5°	543.7	763.2	1391.3	1573.6	2144.4	2671.2	2816.4	2907.6	2995.4	3008.9	3012.2
25°	489.6	699.1	1387.9	1604.1	2225.4	2728.6	2840.1	2907.6	2958.2	2965.0	2965.0
27.5°	439.0	628.1	1374.4	1610.8	2286.3	2742.1	2829.9	2877.2	2900.8	2914.4	2914.4
30°	395.1	560.6	1340.6	1597.3	2313.3	2728.6	2799.5	2823.2	2846.8	2867.1	2877.2
32.5°	361.3	496.4	1290.0	1570.3	2316.6	2694.9	2745.5	2759.0	2792.8	2840.1	2856.9
35°	330.9	432.2	1232.6	1533.2	2296.3	2640.8	2674.6	2688.1	2755.6	2826.5	2850.2
37.5°	300.6	385.0	1158.3	1469.0	2266.0	2576.6	2600.3	2623.9	2728.6	2813.0	2840.1
40°	270.2	344.5	1070.5	1398.0	2218.7	2499.0	2519.2	2556.3	2694.9	2792.8	2819.8
42.5°	246.5	310.7	976.0	1323.8	2157.9	2411.2	2441.6	2495.6	2654.3	2759.0	2789.4
45°	226.3	276.9	874.7	1222.4	2080.2	2320.0	2363.9	2438.2	2607.0	2708.3	2735.3
47.5°	206.0	253.3	770.0	1117.8	1995.8	2228.8	2286.3	2370.6	2542.9	2640.8	2664.5
50°	189.1	229.6	665.2	1006.4	1904.6	2130.9	2198.4	2286.3	2461.9	2553.0	2583.4
52.5°	175.6	209.3	567.3	894.9	1799.9	2029.5	2107.3	2198.4	2363.9	2451.7	2472.0
55°	162.1	192.5	482.9	776.7	1691.9	1921.5	2005.9	2093.7	2255.8	2330.1	2343.6
57.5°	155.3	179.0	412.0	665.2	1577.1	1799.9	1894.5	1975.5	2127.5	2184.9	2198.4
60°	145.2	168.9	357.9	570.7	1452.1	1685.1	1766.2	1847.2	1975.5	2022.8	2033.0
62.5°	135.0	162.1	317.5	479.5	1323.8	1550.0	1631.1	1705.4	1813.5	1847.2	1860.7
65°	128.3	155.3	287.0	412.0	1192.1	1408.2	1489.2	1553.5	1641.2	1674.9	1681.8
67.5°	121.6	148.6	263.4	354.6	1060.4	1266.3	1327.2	1387.9	1455.5	1489.2	1492.6
70°	111.4	141.9	243.2	314.0	925.3	1104.3	1155.0	1219.1	1273.1	1290.0	1300.2
72.5°	104.7	131.7	229.6	283.6	786.8	949.0	996.2	1033.4	1080.7	1097.5	1097.5
75°	94.6	118.2	216.2	253.3	645.0	776.7	817.2	854.4	891.5	898.3	888.1
77.5°	84.4	104.7	185.7	212.7	503.2	614.6	648.4	668.6	699.1	705.8	709.2
80°	70.9	91.2	145.2	165.5	364.7	452.5	476.2	493.1	520.1	520.1	526.8
82.5°	54.0	70.9	104.7	118.2	246.5	310.7	330.9	341.1	357.9	357.9	357.9
85°	33.7	43.9	67.6	77.7	148.6	189.1	202.6	206.0	219.5	222.9	222.9
87.5°	16.9	23.6	43.9	47.3	77.7	97.9	97.9	104.7	104.7	101.3	97.9
90°	2.6	4.6	6.6	7.2	11.2	16.7	19.4	17.3	13.0	9.7	9.7
92.5°	10.2	27.6	45.1	49.4	69.4	96.2	109.6	96.0	68.9	48.6	46.7
95°	24.5	56.4	88.3	96.3	170.9	270.5	320.3	285.8	216.8	165.1	159.2
97.5°	42.5	70.6	98.7	105.7	230.2	396.3	479.2	457.4	413.9	381.2	370.0
100°	56.3	81.8	107.3	113.7	251.9	436.1	528.2	529.8	532.9	535.3	522.0
102.5°	68.1	91.8	115.6	121.6	261.7	448.6	542.0	569.7	625.2	666.9	655.4
105°	88.1	108.2	128.3	133.3	269.1	449.9	540.4	602.6	727.1	820.5	814.3
107.5°	108.5	127.3	146.1	150.8	270.4	429.9	509.7	596.5	770.1	900.4	901.8
110°	122.3	139.3	156.3	160.5	268.4	412.2	484.1	581.1	775.2	920.8	927.2



TEST NUMBER: P936469

CATALOG NUMBER: SQ4-FB-025U-100D-935-1D-UNV-STD-W-12

**CANDELA DISTRIBUTION (continued):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	136.0	152.1	168.3	172.3	268.5	396.7	460.8	560.2	758.8	907.8	917.6
115°	156.4	171.3	186.2	190.0	270.9	378.9	432.9	528.6	719.9	863.5	877.0
117.5°	176.6	190.2	203.7	207.1	276.0	367.8	413.7	500.1	672.8	802.3	817.4
120°	188.4	201.2	213.9	217.1	280.1	364.0	406.0	484.9	642.7	761.1	775.7
122.5°	200.0	212.8	225.6	228.8	285.9	362.0	400.1	471.2	613.3	719.9	734.3
125°	217.6	229.4	241.1	244.0	293.9	360.5	393.7	454.0	574.8	665.3	678.6
127.5°	231.9	243.8	255.6	258.6	301.9	359.5	388.3	440.1	543.8	621.5	632.8
130°	239.6	252.4	265.1	268.3	307.7	360.1	386.3	432.5	524.7	593.9	604.3
132.5°	247.6	260.3	273.1	276.2	312.3	360.5	384.5	425.8	508.5	570.4	579.7
135°	259.3	270.9	282.5	285.4	317.5	360.1	381.4	416.0	485.2	537.1	545.1
137.5°	271.4	282.9	294.3	297.2	325.1	362.4	380.9	410.2	468.6	512.5	519.0
140°	281.3	291.9	302.5	305.2	329.8	362.7	379.1	404.4	454.9	492.8	498.9
142.5°	289.0	298.8	308.6	311.1	333.7	364.0	379.1	401.3	445.7	479.0	484.3
145°	300.8	309.4	317.9	320.0	338.8	364.0	376.6	394.7	431.0	458.2	462.2
147.5°	312.6	320.9	329.2	331.3	346.3	366.5	376.6	390.9	419.4	440.8	444.1
150°	320.3	327.8	335.3	337.1	350.3	367.8	376.6	388.7	412.8	430.9	433.5
152.5°	328.2	333.9	339.5	341.0	352.8	368.7	376.6	386.9	407.5	422.9	425.0
155°	339.9	344.1	348.4	349.4	358.4	370.5	376.6	384.8	401.2	413.5	414.8
157.5°	348.6	352.7	356.9	357.9	364.1	372.4	376.6	383.0	395.7	405.2	406.1
160°	354.6	357.8	361.0	361.8	366.7	373.3	376.6	382.0	392.9	401.1	401.6
162.5°	360.5	362.9	365.3	365.8	369.4	374.2	376.6	381.2	390.4	397.3	397.8
165°	366.9	369.0	371.2	371.7	373.3	375.5	376.6	379.9	386.5	391.4	391.9
167.5°	372.8	373.8	374.8	375.1	376.4	378.2	379.1	381.3	385.6	388.9	389.1
170°	376.6	377.6	378.6	378.9	379.0	379.1	379.1	381.3	385.6	388.9	388.9
172.5°	378.6	378.9	379.1	379.1	379.1	379.1	379.1	380.8	384.3	386.8	386.6
175°	381.4	381.4	381.4	381.4	380.7	379.7	379.1	380.2	382.4	384.0	384.0
177.5°	381.4	381.4	381.4	381.4	380.8	380.1	379.7	380.5	382.2	383.5	383.2
180°	381.4	381.4	381.4	381.4	381.4	381.4	381.4	381.4	381.4	381.4	381.4



TEST NUMBER: P936469

CATALOG NUMBER: SQ4-FB-025U-100D-935-1D-UNV-STD-W-12

**CANDELA DISTRIBUTION (continued):**

	80°	90°
0°	1050.3	1050.3
2.5°	1121.1	1114.4
5°	1442.0	1448.7
7.5°	1941.8	1938.4
10°	2414.6	2444.9
12.5°	2759.0	2765.8
15°	2968.4	2981.9
17.5°	3049.4	3052.8
20°	3052.8	3046.1
22.5°	3015.7	3008.9
25°	2971.8	2968.4
27.5°	2931.2	2934.6
30°	2914.4	2924.5
32.5°	2914.4	2931.2
35°	2921.1	2938.0
37.5°	2917.7	2938.0
40°	2904.2	2927.8
42.5°	2867.1	2883.9
45°	2809.6	2829.9
47.5°	2735.3	2748.9
50°	2640.8	2654.3
52.5°	2522.6	2526.0
55°	2380.7	2394.3
57.5°	2228.8	2232.2
60°	2060.0	2070.1
62.5°	1881.0	1881.0
65°	1691.9	1698.6
67.5°	1496.0	1512.9
70°	1296.7	1300.2
72.5°	1100.9	1100.9
75°	898.3	901.7
77.5°	705.8	705.8
80°	523.5	526.8
82.5°	361.3	368.1
85°	226.3	226.3
87.5°	104.7	94.6
90°	9.7	9.7
92.5°	39.0	31.3
95°	135.8	112.4
97.5°	325.5	280.8
100°	468.9	415.8
102.5°	609.9	564.4
105°	789.9	765.4
107.5°	907.8	913.7
110°	952.7	978.2





TEST NUMBER: P936469

CATALOG NUMBER: SQ4-FB-025U-100D-935-1D-UNV-STD-W-12

**CANDELA DISTRIBUTION (continued):**

	80°	90°
112.5°	956.7	995.8
115°	931.3	985.6
117.5°	877.6	937.7
120°	834.2	892.6
122.5°	792.0	849.7
125°	731.7	784.9
127.5°	677.6	722.4
130°	645.7	687.1
132.5°	616.8	653.8
135°	577.1	609.0
137.5°	545.2	571.4
140°	523.4	547.8
142.5°	505.3	526.4
145°	478.1	494.1
147.5°	457.4	470.6
150°	444.2	454.9
152.5°	433.0	441.1
155°	420.1	425.5
157.5°	410.0	413.7
160°	403.8	406.0
162.5°	399.8	401.9
165°	394.1	396.3
167.5°	390.0	390.9
170°	388.9	388.9
172.5°	385.8	385.0
175°	384.0	384.0
177.5°	382.4	381.4
180°	381.4	381.4



TEST NUMBER: P936469  
 CATALOG NUMBER: SQ4-FB-025U-100D-935-1D-UNV-STD-W-12

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.23	8.47	7.91	9.17	10.00	20.43	21.66	21.11	22.37	23.19
	3H	7.97	9.08	8.66	9.80	10.66	22.30	23.41	22.99	24.13	24.99
	4H	8.28	9.34	8.99	10.06	10.93	22.96	24.02	23.68	24.74	25.61
	6H	8.55	9.53	9.28	10.26	11.15	23.42	24.39	24.14	25.13	26.02
	8H	8.63	9.56	9.37	10.32	11.21	23.55	24.48	24.29	25.24	26.13
	12H	8.66	9.55	9.40	10.30	11.22	23.63	24.52	24.38	25.27	26.19
4H	2H	14.50	15.55	15.22	16.28	17.15	20.74	21.80	21.46	22.52	23.40
	3H	16.10	16.99	16.83	17.75	18.64	22.83	23.71	23.56	24.47	25.37
	4H	16.21	17.02	16.96	17.78	18.70	23.61	24.42	24.36	25.18	26.10
	6H	16.24	16.95	17.01	17.73	18.66	24.18	24.88	24.94	25.67	26.60
	8H	16.23	16.89	17.00	17.67	18.61	24.35	25.01	25.12	25.80	26.74
	12H	16.21	16.80	17.00	17.61	18.55	24.47	25.06	25.26	25.87	26.82
8H	4H	17.69	18.35	18.46	19.13	20.07	23.71	24.36	24.47	25.15	26.09
	6H	17.95	18.50	18.75	19.32	20.27	24.36	24.90	25.16	25.73	26.67
	8H	17.98	18.46	18.78	19.29	20.24	24.59	25.07	25.39	25.90	26.86
	12H	17.96	18.39	18.77	19.21	20.22	24.75	25.18	25.56	26.00	27.01
12H	4H	17.86	18.45	18.65	19.26	20.20	23.68	24.27	24.47	25.08	26.02
	6H	18.22	18.70	19.03	19.53	20.49	24.35	24.83	25.15	25.66	26.62
	8H	18.30	18.73	19.12	19.55	20.57	24.60	25.03	25.41	25.84	26.86