

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: CORELITE

Report Number: P519676

Luminaire Tested: **SQ4-050U-0D-840-1D-UNV-STD-W-4**

Issue Date: 4/29/2021

**Test Information**

Test Method: LM-79-2019  
Report Number: P519676  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-536-21)  
Test Lab: INNOVATION CENTER  
Issue Date: 4/29/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: CORELITE  
Catalog Number: SQ4-050U-0D-840-1D-UNV-STD-W-4  
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE  
UPLIGHT 500 LUMENS PER FOOT  
Light Source: 4000K CCT, 80 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 2012.0 lumens  
Efficiency: N/A  
Efficacy: 163.6 lumens/watt  
N/A  
Luminous Opening: Rectangular (W 0.29' x L: 4' x H: 0')  
CIE Type: Indirect

Input Watts (W): 12.3  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P519676  
CATALOG NUMBER: SQ4-050U-0D-840-1D-UNV-STD-W-4

### Luminous Intensity Polar Plot

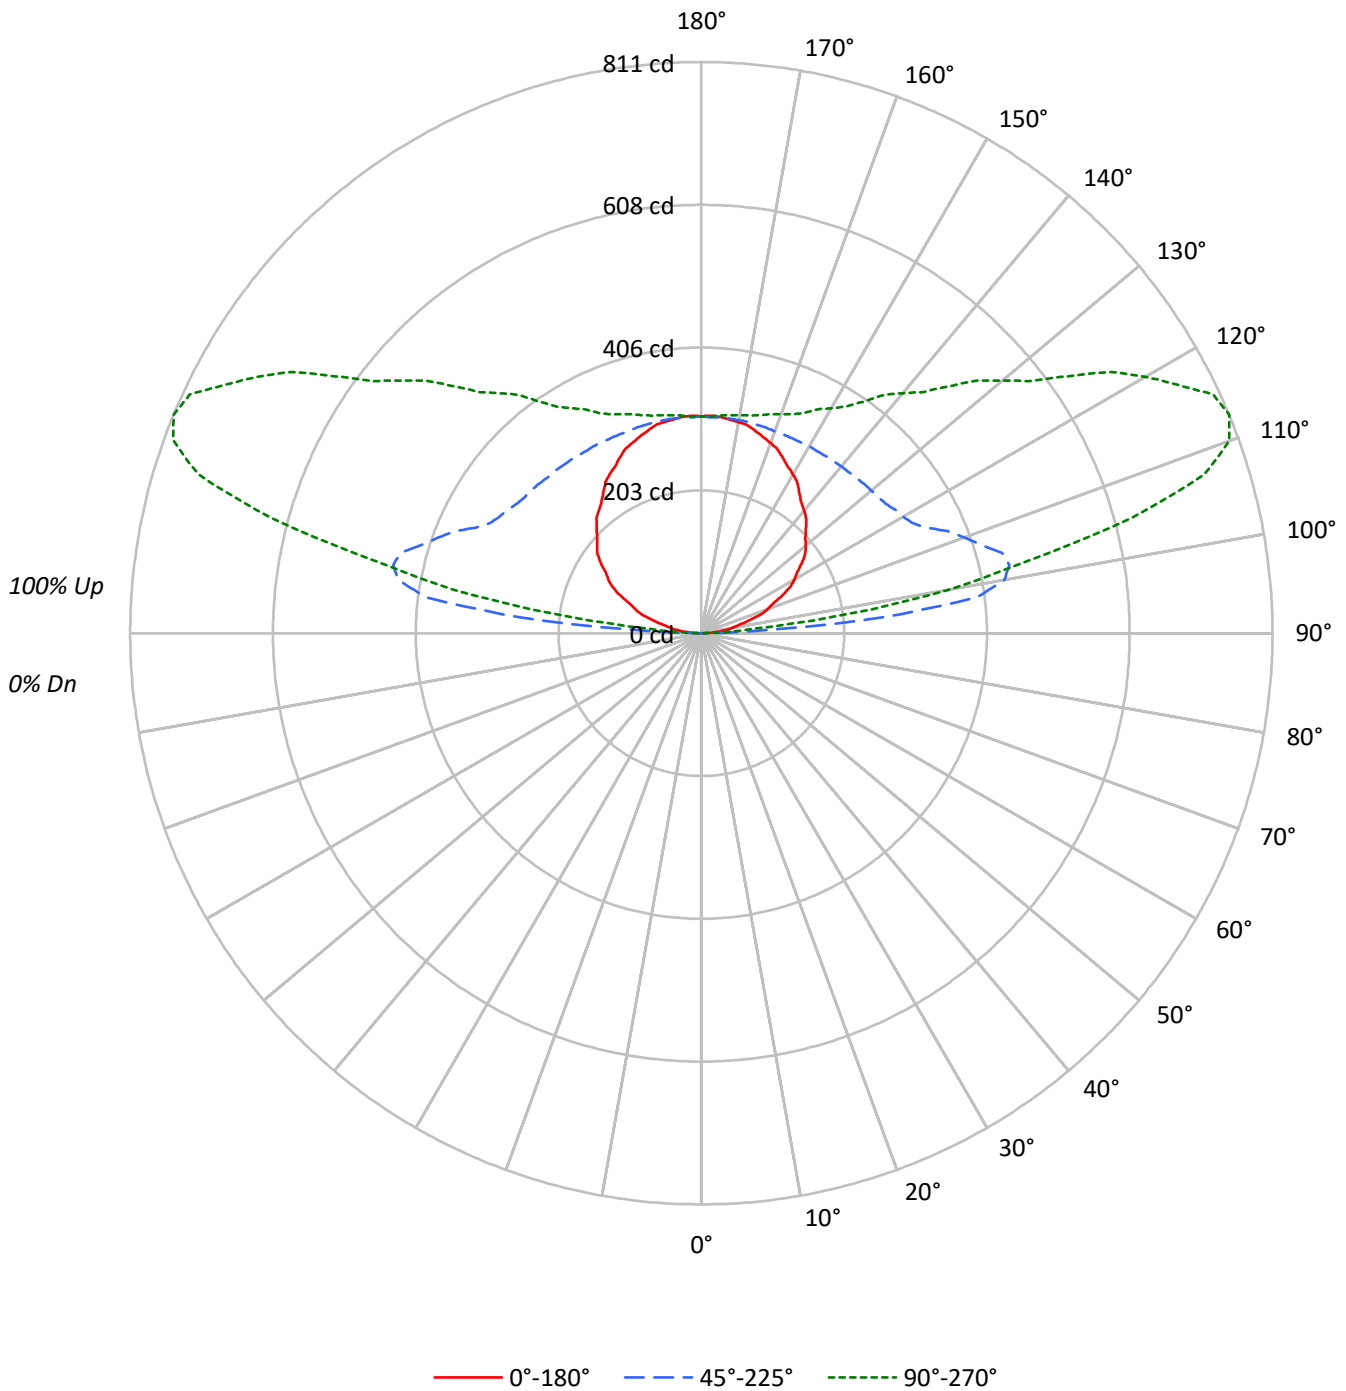



TEST NUMBER: P519676

CATALOG NUMBER: SQ4-050U-0D-840-1D-UNV-STD-W-4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20								20				20				20	
RC	80								50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	95	95	95	95	81	81	81	81	56	56	56	32	32	32	10	10	10	0
1	87	83	79	76	74	71	68	65	48	47	45	28	27	26	9	9	8	0
2	79	72	66	62	67	62	57	53	42	40	37	24	23	22	8	7	7	0
3	72	63	57	51	61	54	49	44	37	34	31	21	20	18	7	6	6	0
4	65	56	48	43	56	48	42	37	33	29	26	19	17	16	6	6	5	0
5	60	49	42	36	51	42	36	32	29	25	22	17	15	13	5	5	4	0
6	55	44	36	31	47	38	32	27	26	22	19	15	13	11	5	4	4	0
7	50	39	32	27	43	34	28	23	23	19	17	14	11	10	4	4	3	0
8	47	35	28	23	40	30	24	20	21	17	14	12	10	9	4	3	3	0
9	43	32	25	20	37	27	22	18	19	15	13	11	9	8	4	3	3	0
10	40	29	22	18	34	25	19	16	17	14	11	10	8	7	3	3	2	0

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
95°	2308	27269	7971
100°	2423	23219	19005
105°	2542	15753	22568
110°	2700	10717	21516
115°	2768	7722	17500
120°	2816	6106	13439
125°	2805	5147	10232
130°	2773	4523	8006
135°	2741	4059	6464
140°	2733	3723	5358
145°	2735	3460	4520
150°	2776	3262	3927
155°	2794	3107	3510
160°	2821	2997	3249
165°	2839	2925	3057
170°	2850	2878	2943
175°	2853	2845	2872



TEST NUMBER: P519676

CATALOG NUMBER: SQ4-050U-0D-840-1D-UNV-STD-W-4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	0.0	0.0
10°-20°	0.0	0.0
20°-30°	0.0	0.0
30°-40°	0.0	0.0
40°-50°	0.0	0.0
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	147.9	7.4
100°-110°	401.8	20.0
110°-120°	413.2	20.5
120°-130°	330.3	16.4
130°-140°	259.5	12.9
140°-150°	199.0	9.9
150°-160°	143.1	7.1
160°-170°	87.5	4.4
170°-180°	29.5	1.5
0°-30°	0.0	0.0
0°-40°	0.0	0.0
0°-60°	0.0	0.0
0°-90°	0.0	0.0
90°-120°	962.9	47.9
90°-150°	1751.8	87.1
90°-180°	2012.0	100.0
0°-180°	2012.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
90°	1	4	7	9	9	
95°	22	81	258	112	75	25
105°	71	111	442	673	633	76
115°	127	154	354	704	802	125
125°	174	199	320	539	636	155
135°	210	233	311	439	495	162
145°	243	260	307	373	401	152
155°	274	284	305	335	345	127
165°	297	301	306	319	320	84
175°	308	309	307	311	310	29
180°	308	308	308	308	308	

TEST NUMBER: P519676

CATALOG NUMBER: SQ4-050U-0D-840-1D-UNV-STD-W-4

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
90°	1.0	3.9	6.9	8.9	8.9
92.5°	8.9	40.5	70.3	30.2	25.6
95°	21.8	80.9	257.6	112.1	75.3
97.5°	36.1	89.3	394.9	307.3	215.8
100°	45.6	95.0	437.0	442.9	357.7
102.5°	55.1	100.6	448.0	547.8	472.6
105°	71.3	111.1	441.9	672.9	633.1
107.5°	88.2	123.3	416.3	737.4	748.5
110°	100.1	132.0	397.3	750.1	797.6
112.5°	110.4	140.8	378.3	739.6	811.1
115°	126.8	154.0	353.7	703.7	801.6
117.5°	142.3	168.2	338.1	652.9	763.1
120°	152.6	177.8	330.9	618.8	728.3
122.5°	161.3	186.5	326.2	584.6	690.2
125°	174.4	198.6	320.0	539.2	636.1
127.5°	186.1	210.1	316.7	504.8	588.0
130°	193.2	216.5	315.1	483.2	557.8
132.5°	200.3	223.6	313.5	464.8	530.9
135°	210.1	233.3	311.1	439.2	495.4
137.5°	220.6	241.7	309.9	416.6	463.9
140°	226.9	247.2	309.1	402.2	444.9
142.5°	233.2	252.0	308.3	391.0	426.6
145°	242.8	260.2	307.2	373.2	401.3
147.5°	253.5	268.4	306.2	359.2	381.3
150°	260.6	273.2	306.2	351.1	368.6
152.5°	266.1	277.2	305.4	343.9	358.3
155°	274.5	284.1	305.2	335.1	344.8
157.5°	282.6	290.1	305.2	329.1	336.5
160°	287.3	294.1	305.2	325.1	330.9
162.5°	292.1	297.3	306.0	321.9	326.2
165°	297.2	301.1	306.2	319.1	320.0
167.5°	302.6	304.5	307.2	315.7	316.5
170°	304.2	306.1	307.2	314.1	314.1
172.5°	305.8	306.9	307.2	312.5	312.5
175°	308.1	309.1	307.2	311.1	310.1
177.5°	308.9	308.9	306.6	309.7	308.1
180°	308.1	308.1	308.1	308.1	308.1

(END OF REPORT)