

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: CORELITE

Report Number: P519653

Luminaire Tested: **SQ4-025U-0D-840-1D-UNV-STD-W-6**

Issue Date: 4/29/2021

Test Information

Test Method: LM-79-2019
Report Number: P519653
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-536-32)
Test Lab: INNOVATION CENTER
Issue Date: 4/29/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: CORELITE
Catalog Number: SQ4-025U-0D-840-1D-UNV-STD-W-6
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE
UPLIGHT 250 LUMENS PER FOOT
Light Source: 4000K CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1463.4 lumens
Efficiency: N/A
Efficacy: 178.5 lumens/watt
N/A
Luminous Opening: Rectangular (W 0.29' x L: 6' x H: 0')
CIE Type: Indirect

Input Watts (W): 8.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P519653
CATALOG NUMBER: SQ4-025U-0D-840-1D-UNV-STD-W-6

Luminous Intensity Polar Plot

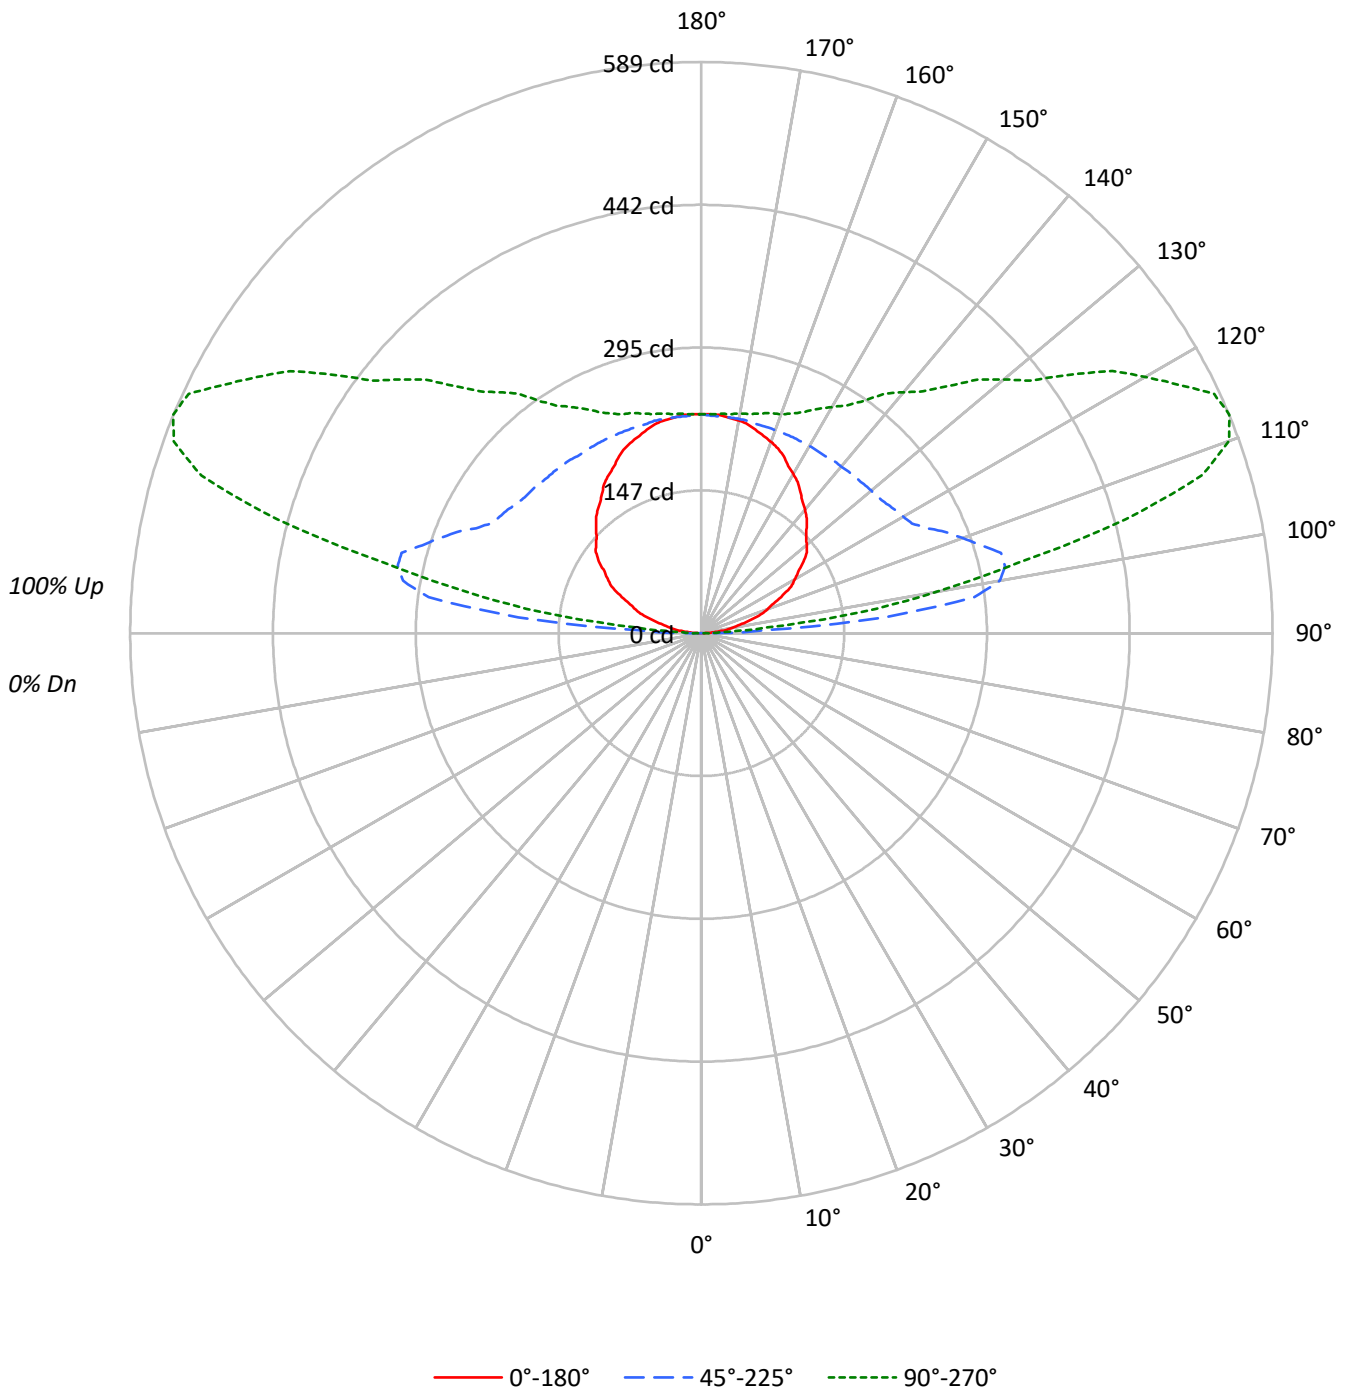



TEST NUMBER: P519653

CATALOG NUMBER: SQ4-025U-0D-840-1D-UNV-STD-W-6

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20				
RC	80					70					50					30				
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	20		
RCR																				
0	95	95	95	95	81	81	81	81	56	56	56	32	32	32	10	10	10	0		
1	87	83	79	76	74	71	68	65	48	47	45	28	27	26	9	9	8	0		
2	79	72	66	62	67	62	57	53	42	40	37	24	23	22	8	7	7	0		
3	72	63	57	51	61	54	49	44	37	34	31	21	20	18	7	6	6	0		
4	65	56	48	43	56	48	42	37	33	29	26	19	17	16	6	6	5	0		
5	60	49	42	36	51	42	36	32	29	25	22	17	15	13	5	5	4	0		
6	55	44	36	31	47	38	32	27	26	22	19	15	13	11	5	4	4	0		
7	50	39	32	27	43	34	28	23	23	19	17	14	11	10	4	4	3	0		
8	47	35	28	23	40	30	24	20	21	17	14	12	10	9	4	3	3	0		
9	43	32	25	20	37	27	22	18	19	15	13	11	9	8	4	3	3	0		
10	40	29	22	18	34	25	19	16	17	14	11	10	8	7	3	3	2	0		

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
95°	1023	13381	4700
100°	1180	11073	8714
105°	1238	7602	10765
110°	1302	5154	10411
115°	1348	3729	8489
120°	1370	2956	6499
125°	1381	2499	4982
130°	1357	2188	3892
135°	1334	1964	3135
140°	1336	1801	2603
145°	1337	1674	2196
150°	1347	1583	1912
155°	1365	1513	1709
160°	1374	1459	1573
165°	1382	1419	1493
170°	1392	1401	1437
175°	1394	1385	1403



TEST NUMBER: P519653

CATALOG NUMBER: SQ4-025U-0D-840-1D-UNV-STD-W-6

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	0.0	0.0
10°-20°	0.0	0.0
20°-30°	0.0	0.0
30°-40°	0.0	0.0
40°-50°	0.0	0.0
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	110.0	7.5
100°-110°	289.3	19.8
110°-120°	300.0	20.5
120°-130°	240.6	16.4
130°-140°	188.8	12.9
140°-150°	144.9	9.9
150°-160°	104.4	7.1
160°-170°	63.9	4.4
170°-180°	21.6	1.5
0°-30°	0.0	0.0
0°-40°	0.0	0.0
0°-60°	0.0	0.0
0°-90°	0.0	0.0
90°-120°	699.3	47.8
90°-150°	1273.6	87.0
90°-180°	1463.0	100.0
0°-180°	1463.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
90°	1	4	12	6	6	
95°	14	57	190	98	67	17
105°	52	79	320	486	453	55
115°	93	112	256	511	583	91
125°	129	144	233	394	465	114
135°	153	169	226	318	360	119
145°	178	189	223	271	292	112
155°	201	207	223	245	252	92
165°	217	220	223	232	234	61
175°	226	226	224	227	227	21
180°	226	226	226	226	226	



TEST NUMBER: P519653

CATALOG NUMBER: SQ4-025U-0D-840-1D-UNV-STD-W-6

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
90°	1.4	4.3	11.6	5.8	5.8
92.5°	6.1	29.3	64.8	28.7	18.5
95°	14.5	56.9	189.6	97.7	66.6
97.5°	25.2	62.5	283.7	225.6	166.2
100°	33.3	67.3	312.6	316.8	246.0
102.5°	40.2	71.9	320.7	394.6	334.0
105°	52.1	79.0	319.9	485.6	453.0
107.5°	64.3	89.2	301.6	532.8	540.7
110°	72.4	95.0	286.6	545.0	578.9
112.5°	80.5	102.0	272.7	537.3	589.4
115°	92.6	112.4	256.2	511.1	583.3
117.5°	104.5	122.6	244.9	474.8	554.9
120°	111.4	128.4	240.3	450.4	528.3
122.5°	118.4	135.4	236.8	426.1	502.8
125°	128.8	144.4	233.0	393.8	464.6
127.5°	137.2	153.1	229.8	367.8	427.5
130°	141.8	158.8	228.7	351.5	406.7
132.5°	146.5	163.5	227.5	337.5	387.0
135°	153.4	169.0	225.8	317.9	360.4
137.5°	160.7	175.9	225.5	303.3	338.1
140°	166.4	180.6	224.3	291.7	324.2
142.5°	171.1	184.1	224.3	283.4	311.5
145°	178.0	189.3	222.9	271.1	292.4
147.5°	185.0	196.0	222.9	260.9	278.5
150°	189.6	199.5	222.9	255.1	269.2
152.5°	194.2	201.9	222.9	250.3	261.1
155°	201.2	206.8	222.9	244.8	251.8
157.5°	206.4	211.8	222.9	239.8	244.9
160°	209.9	214.1	222.9	237.4	240.3
162.5°	213.3	216.5	222.9	235.1	237.9
165°	217.1	219.9	222.9	231.6	234.5
167.5°	220.6	222.0	224.3	230.2	231.3
170°	222.9	224.3	224.3	230.1	230.1
172.5°	224.0	224.3	224.3	228.9	227.8
175°	225.8	225.8	224.3	227.2	227.2
177.5°	225.8	225.8	224.6	226.9	225.8
180°	225.8	225.8	225.8	225.8	225.8

(END OF REPORT)