

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: CORELITE

Report Number: P519773

Luminaire Tested: **SQ4-150U-0D-840-1D-UNV-STD-W-6**

Issue Date: 4/29/2021

**Test Information**

Test Method: LM-79-2019  
Report Number: P519773  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-536-25)  
Test Lab: INNOVATION CENTER  
Issue Date: 4/29/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: CORELITE  
Catalog Number: SQ4-150U-0D-840-1D-UNV-STD-W-6  
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE  
UPLIGHT 1500 LUMENS PER FOOT  
Light Source: 4000K CCT, 80 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 9126.9 lumens  
Efficiency: N/A  
Efficacy: 159.0 lumens/watt  
N/A  
Luminous Opening: Rectangular (W 0.29' x L: 6' x H: 0')  
CIE Type: Indirect

Input Watts (W): 57.4  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P519773  
CATALOG NUMBER: SQ4-150U-0D-840-1D-UNV-STD-W-6

### Luminous Intensity Polar Plot

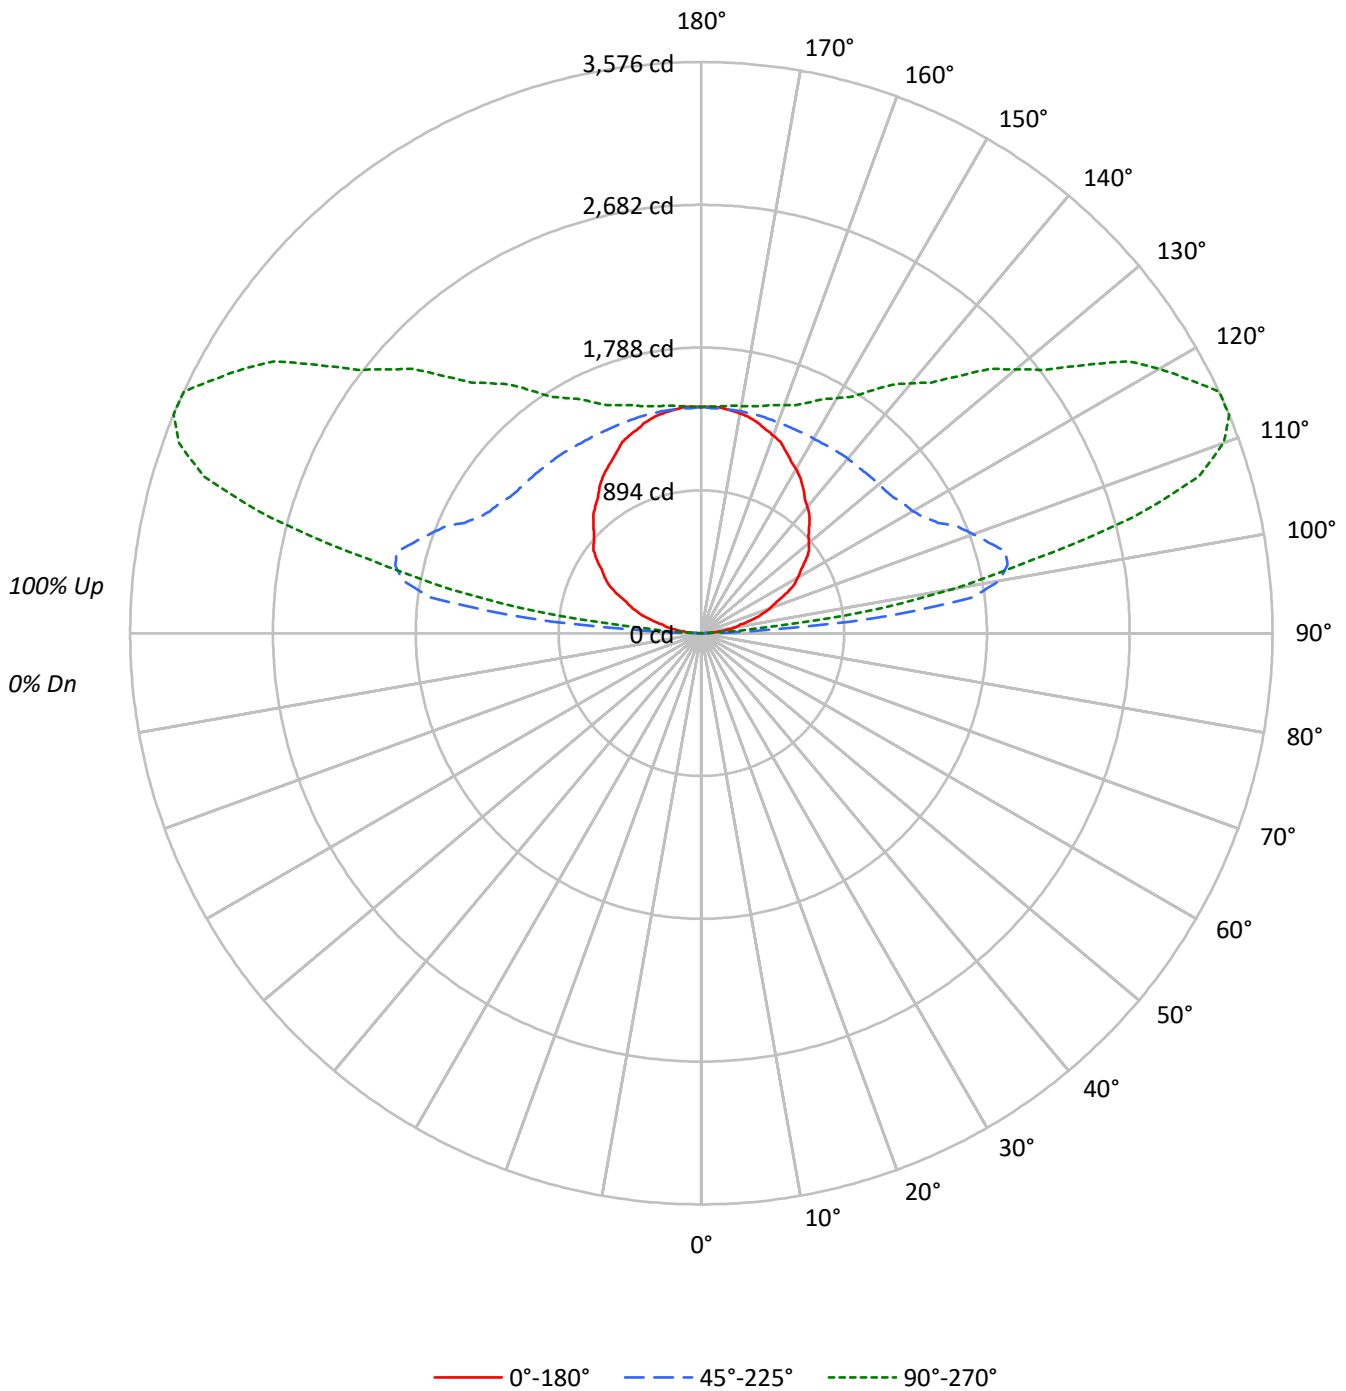



TEST NUMBER: P519773

CATALOG NUMBER: SQ4-150U-0D-840-1D-UNV-STD-W-6

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	95	95	95	95	81	81	81	81	56	56	56	32	32	32	10	10	10	10	10	10	0																
1	87	83	79	76	74	71	68	65	48	47	45	28	27	26	9	9	8	8	8	8	0																
2	79	72	66	62	67	62	57	53	42	40	37	24	23	22	8	7	7	7	7	7	0																
3	72	63	57	51	61	54	49	44	37	34	31	21	20	18	7	6	6	6	6	6	0																
4	65	56	48	43	56	48	42	37	33	29	26	19	17	16	6	6	5	5	5	5	0																
5	60	49	42	36	51	42	36	32	29	25	22	17	15	13	5	5	4	4	4	4	0																
6	55	44	36	31	47	38	32	27	26	22	19	15	13	11	5	4	4	4	4	4	0																
7	50	39	32	27	43	34	28	23	23	19	17	14	11	10	4	4	3	3	3	3	0																
8	47	35	28	23	40	30	24	20	21	17	14	12	10	9	4	3	3	3	3	3	0																
9	43	32	25	20	37	27	22	18	19	15	13	11	9	8	4	3	3	3	3	3	0																
10	40	29	22	18	34	25	19	16	17	14	11	10	8	7	3	3	2	2	2	2	0																

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
95°	7205	77213	23769
100°	7449	67144	56617
105°	7859	46895	66342
110°	8249	32556	62562
115°	8472	23818	52050
120°	8585	18802	40733
125°	8546	15817	31357
130°	8413	13881	24569
135°	8311	12486	19789
140°	8295	11452	16395
145°	8341	10629	13902
150°	8420	9989	12067
155°	8511	9524	10817
160°	8628	9196	9944
165°	8694	8975	9373
170°	8727	8813	9022
175°	8750	8712	8806



TEST NUMBER: P519773

CATALOG NUMBER: SQ4-150U-0D-840-1D-UNV-STD-W-6

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	0.0	0.0
10°-20°	0.0	0.0
20°-30°	0.0	0.0
30°-40°	0.0	0.0
40°-50°	0.0	0.0
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	657.9	7.2
100°-110°	1778.8	19.5
110°-120°	1870.1	20.5
120°-130°	1519.0	16.6
130°-140°	1191.6	13.1
140°-150°	914.5	10.0
150°-160°	657.7	7.2
160°-170°	401.8	4.4
170°-180°	135.5	1.5
0°-30°	0.0	0.0
0°-40°	0.0	0.0
0°-60°	0.0	0.0
0°-90°	0.0	0.0
90°-120°	4306.8	47.2
90°-150°	7931.9	86.9
90°-180°	9127.0	100.0
0°-180°	9126.9	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
90°	3	9	20	21	20	
95°	102	358	1094	566	337	113
105°	331	511	1973	2911	2792	348
115°	582	712	1636	3168	3576	575
125°	797	913	1475	2489	2924	710
135°	955	1069	1435	2010	2275	738
145°	1111	1194	1416	1720	1851	695
155°	1254	1303	1403	1543	1594	578
165°	1365	1379	1410	1464	1472	385
175°	1417	1416	1411	1429	1426	135
180°	1416	1416	1416	1416	1416	



TEST NUMBER: P519773

CATALOG NUMBER: SQ4-150U-OD-840-1D-UNV-STD-W-6

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
90°	3.0	9.0	19.8	21.3	19.8
92.5°	43.3	157.7	311.2	135.1	97.8
95°	102.1	358.4	1094.1	566.2	336.8
97.5°	164.0	411.0	1705.4	1411.3	1036.5
100°	210.3	432.3	1895.6	1976.9	1598.4
102.5°	252.9	461.8	1962.6	2405.7	2122.6
105°	330.7	510.9	1973.3	2910.8	2791.6
107.5°	402.6	567.1	1887.1	3225.8	3265.5
110°	458.7	607.7	1810.3	3310.4	3478.8
112.5°	508.6	648.1	1739.5	3293.5	3576.3
115°	582.1	711.7	1636.5	3168.1	3576.3
117.5°	654.0	775.6	1568.6	2976.4	3439.2
120°	697.9	817.1	1528.4	2838.9	3311.2
122.5°	739.3	856.1	1504.0	2691.5	3167.3
125°	796.9	913.2	1475.0	2489.1	2924.1
127.5°	850.0	964.1	1458.0	2323.9	2706.5
130°	879.2	996.9	1450.6	2221.9	2567.6
132.5°	909.7	1026.2	1443.3	2129.9	2448.1
135°	955.4	1068.6	1435.4	2009.8	2275.0
137.5°	1001.4	1108.4	1428.7	1912.4	2128.4
140°	1033.1	1132.9	1426.3	1849.7	2041.9
142.5°	1063.6	1157.5	1421.4	1793.1	1961.4
145°	1110.8	1194.3	1415.6	1720.3	1851.4
147.5°	1153.8	1227.7	1408.9	1654.4	1755.1
150°	1185.5	1251.1	1406.5	1618.6	1699.0
152.5°	1214.8	1272.0	1405.2	1585.3	1651.5
155°	1254.1	1303.2	1403.4	1543.2	1593.9
157.5°	1294.9	1329.2	1403.7	1513.9	1547.2
160°	1318.1	1346.4	1404.9	1495.4	1519.2
162.5°	1336.4	1359.9	1406.1	1480.6	1498.5
165°	1365.3	1378.7	1409.5	1464.5	1472.0
167.5°	1385.1	1394.4	1409.8	1450.7	1454.3
170°	1397.3	1401.8	1411.0	1444.5	1444.5
172.5°	1407.1	1408.0	1411.0	1437.2	1436.0
175°	1417.1	1415.6	1411.0	1429.2	1426.3
177.5°	1420.5	1416.9	1410.7	1422.8	1419.3
180°	1415.6	1415.6	1415.6	1415.6	1415.6

(END OF REPORT)