

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: CORELITE

Report Number: P519678

Luminaire Tested: **SQ4-050U-0D-840-1D-UNV-STD-W-8**

Issue Date: 4/29/2021

Test Information

Test Method: LM-79-2019
Report Number: P519678
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-536-21)
Test Lab: INNOVATION CENTER
Issue Date: 4/29/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: CORELITE
Catalog Number: SQ4-050U-0D-840-1D-UNV-STD-W-8
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE
UPLIGHT 500 LUMENS PER FOOT
Light Source: 4000K CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4023.9 lumens
Efficiency: N/A
Efficacy: 169.8 lumens/watt
N/A
Luminous Opening: Rectangular (W 0.29' x L: 8' x H: 0')
CIE Type: Indirect

Input Watts (W): 23.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P519678
CATALOG NUMBER: SQ4-050U-0D-840-1D-UNV-STD-W-8

Luminous Intensity Polar Plot

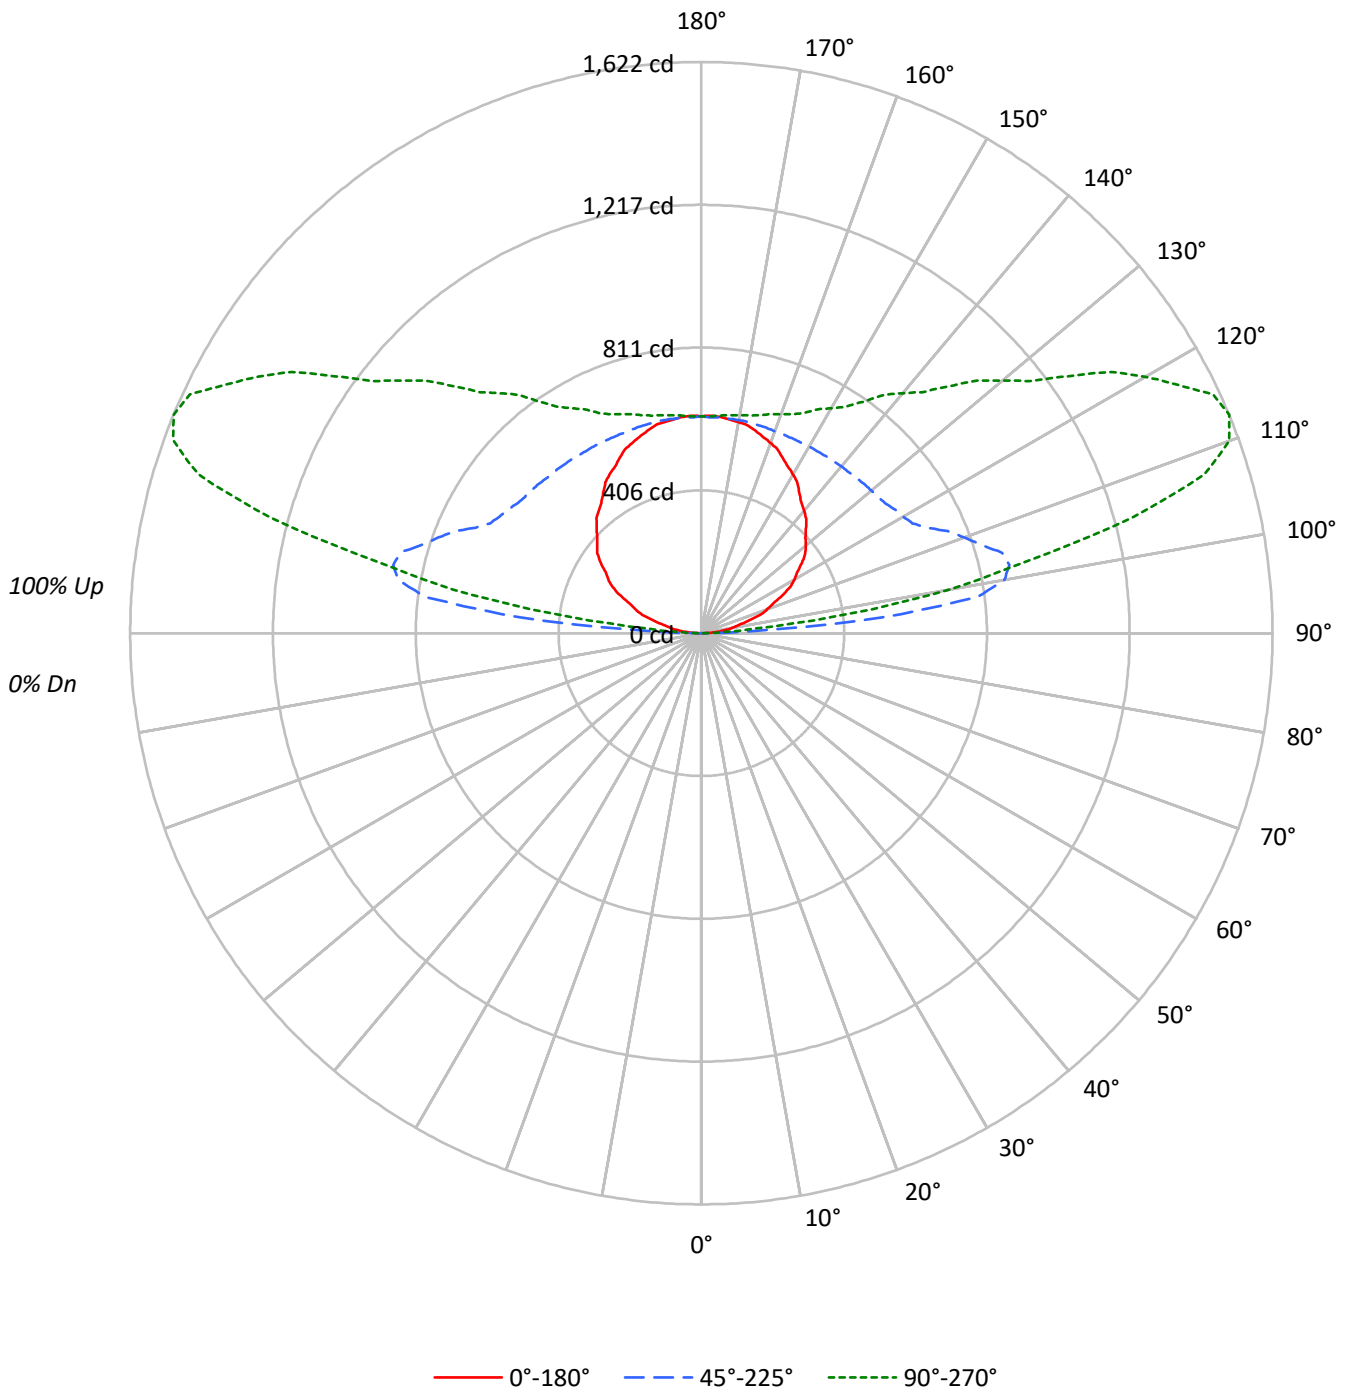



TEST NUMBER: P519678

CATALOG NUMBER: SQ4-050U-0D-840-1D-UNV-STD-W-8

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	95	95	95	95	81	81	81	81	56	56	56	32	32	32	10	10	10	10	10	10	0																
1	87	83	79	76	74	71	68	65	48	47	45	28	27	26	9	9	8	8	8	8	0																
2	79	72	66	62	67	62	57	53	42	40	37	24	23	22	8	7	7	7	7	7	0																
3	72	63	57	51	61	54	49	44	37	34	31	21	20	18	7	6	6	6	6	6	0																
4	65	56	48	43	56	48	42	37	33	29	26	19	17	16	6	6	5	5	5	5	0																
5	60	49	42	36	51	42	36	32	29	25	22	17	15	13	5	5	4	4	4	4	0																
6	55	44	36	31	47	38	32	27	26	22	19	15	13	11	5	4	4	4	4	4	0																
7	50	39	32	27	43	34	28	23	23	19	17	14	11	10	4	4	3	3	3	3	0																
8	47	35	28	23	40	30	24	20	21	17	14	12	10	9	4	3	3	3	3	3	0																
9	43	32	25	20	37	27	22	18	19	15	13	11	9	8	4	3	3	3	3	3	0																
10	40	29	22	18	34	25	19	16	17	14	11	10	8	7	3	3	2	2	2	2	0																

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
95°	2308	27269	7971
100°	2423	23216	19005
105°	2543	15753	22570
110°	2699	10717	21516
115°	2768	7722	17499
120°	2816	6107	13438
125°	2805	5148	10232
130°	2773	4523	8007
135°	2741	4059	6464
140°	2733	3723	5358
145°	2734	3459	4520
150°	2776	3262	3927
155°	2794	3106	3510
160°	2821	2996	3249
165°	2839	2924	3057
170°	2850	2878	2943
175°	2854	2845	2872



TEST NUMBER: P519678

CATALOG NUMBER: SQ4-050U-0D-840-1D-UNV-STD-W-8

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	0.0	0.0
10°-20°	0.0	0.0
20°-30°	0.0	0.0
30°-40°	0.0	0.0
40°-50°	0.0	0.0
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	295.8	7.4
100°-110°	803.7	20.0
110°-120°	826.3	20.5
120°-130°	660.7	16.4
130°-140°	519.1	12.9
140°-150°	398.0	9.9
150°-160°	286.2	7.1
160°-170°	175.1	4.4
170°-180°	59.0	1.5
0°-30°	0.0	0.0
0°-40°	0.0	0.0
0°-60°	0.0	0.0
0°-90°	0.0	0.0
90°-120°	1925.8	47.9
90°-150°	3503.7	87.1
90°-180°	4024.0	100.0
0°-180°	4023.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
90°	2	8	14	18	18	
95°	44	162	515	224	151	49
105°	143	222	884	1346	1266	152
115°	254	308	707	1407	1603	250
125°	349	397	640	1078	1272	311
135°	420	467	622	878	991	325
145°	486	520	614	746	803	305
155°	549	568	610	670	690	253
165°	594	602	612	638	640	168
175°	616	618	614	622	620	59
180°	616	616	616	616	616	



TEST NUMBER: P519678

CATALOG NUMBER: SQ4-050U-0D-840-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
90°	2.0	7.8	13.9	17.8	17.8
92.5°	17.8	81.0	140.7	60.4	51.1
95°	43.6	161.8	515.2	224.2	150.6
97.5°	72.1	178.7	789.9	614.5	431.6
100°	91.2	190.0	873.9	885.9	715.4
102.5°	110.2	201.2	896.1	1095.6	945.2
105°	142.7	222.1	883.8	1345.7	1266.3
107.5°	176.4	246.5	832.7	1474.8	1496.9
110°	200.1	264.1	794.6	1500.3	1595.2
112.5°	220.8	281.6	756.6	1479.2	1622.2
115°	253.6	307.9	707.4	1407.4	1603.1
117.5°	284.6	336.5	676.1	1305.8	1526.3
120°	305.2	355.5	661.9	1237.6	1456.5
122.5°	322.6	373.0	652.4	1169.2	1380.4
125°	348.8	397.2	640.1	1078.4	1272.2
127.5°	372.2	420.2	633.3	1009.7	1175.9
130°	386.4	432.9	630.2	966.5	1115.7
132.5°	400.7	447.2	627.0	929.6	1061.8
135°	420.1	466.6	622.2	878.4	990.8
137.5°	441.1	483.4	619.9	833.2	927.8
140°	453.8	494.5	618.3	804.5	889.8
142.5°	466.5	504.1	616.7	782.0	853.3
145°	485.5	520.4	614.3	746.4	802.6
147.5°	506.9	536.7	612.3	718.4	762.5
150°	521.2	546.4	612.3	702.3	737.2
152.5°	532.3	554.4	610.7	687.9	716.6
155°	548.9	568.3	610.3	670.2	689.6
157.5°	565.2	580.3	610.3	658.2	673.0
160°	574.7	588.2	610.3	650.2	661.9
162.5°	584.2	594.6	611.9	643.8	652.4
165°	594.5	602.2	612.3	638.1	640.1
167.5°	605.2	609.1	614.3	631.4	632.9
170°	608.4	612.2	614.3	628.2	628.2
172.5°	611.5	613.9	614.3	625.0	625.0
175°	616.3	618.2	614.3	622.2	620.3
177.5°	617.9	617.9	613.1	619.4	616.3
180°	616.3	616.3	616.3	616.3	616.3

(END OF REPORT)