

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: CORELITE

Report Number: P520278

Luminaire Tested: **SQ4-F-125U-050D-840-1D-UNV-STD-W-8**

Issue Date: 4/29/2021

**Test Information**

Test Method: LM-79-2019  
Report Number: P520278  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-536-24, G3-1910-536-17)  
Test Lab: INNOVATION CENTER  
Issue Date: 4/29/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: CORELITE  
Catalog Number: SQ4-F-125U-050D-840-1D-UNV-STD-W-8  
Description: CORELITE SQ4 SUSPENDED LED LUMINAIRE  
DOWNLIGHT 500 LUMENS PER FOOT  
UPLIGHT 1250 LUMENS PER FOOT  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 14164.1 lumens  
Efficiency: N/A  
Efficacy: 159.0 lumens/watt  
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.35  
Luminous Opening: Rectangular (W 0.29' x L: 8' x H: 0')  
CIE Type: Semi-Indirect

Input Watts (W): 89.1  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P520278  
CATALOG NUMBER: SQ4-F-125U-050D-840-1D-UNV-STD-W-8

### Luminous Intensity Polar Plot

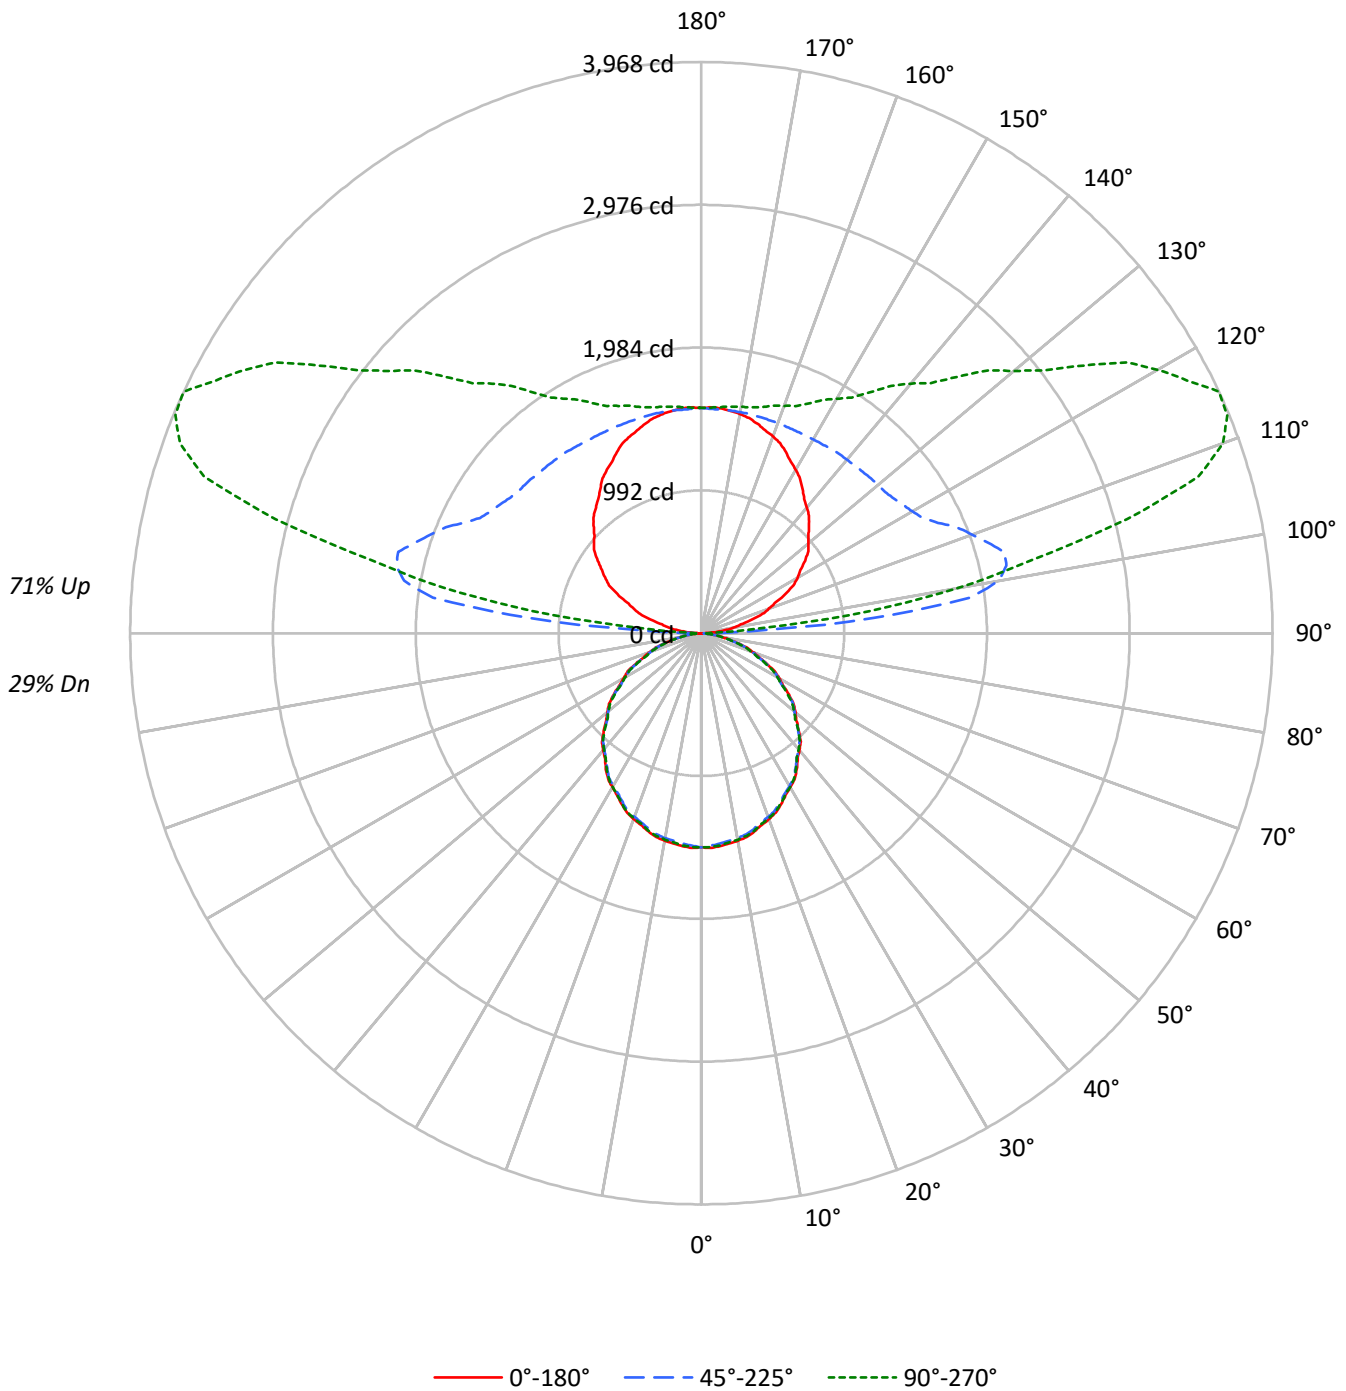



TEST NUMBER: P520278

CATALOG NUMBER: SQ4-F-125U-050D-840-1D-UNV-STD-W-8

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	102	102	102	102	91	91	91	91	71	71	71	53	53	53	37	37	37	29
1	93	89	85	82	83	80	77	74	63	60	58	47	45	44	32	31	31	24
2	85	77	72	67	76	70	65	60	55	51	48	41	39	37	28	27	26	20
3	77	68	61	55	69	61	55	50	48	44	40	36	33	31	25	23	22	17
4	70	60	52	47	63	54	47	42	43	38	34	32	29	26	22	20	19	15
5	64	53	45	40	57	48	41	36	38	33	29	29	25	23	20	18	16	13
6	59	48	40	34	53	43	36	31	34	29	25	26	22	20	18	16	14	11
7	55	43	35	30	49	39	32	27	31	26	22	23	20	17	16	14	13	10
8	51	39	31	26	45	35	28	24	28	23	20	21	18	15	15	13	11	9
9	47	35	28	23	42	32	26	21	26	21	17	20	16	14	14	12	10	8
10	44	32	25	21	39	29	23	19	23	19	16	18	15	12	13	11	9	7

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	6864	6864	6864
5°	6881	6798	6854
10°	6858	6774	6821
15°	6811	6726	6783
20°	6748	6669	6718
25°	6671	6591	6651
30°	6579	6526	6568
35°	6507	6428	6462
40°	6381	6322	6333
45°	6251	6199	6199
50°	6118	6061	6033
55°	5976	5895	5864
60°	5753	5660	5624
65°	5480	5370	5305
70°	5104	4997	4891
75°	4581	4438	4333
80°	3703	3653	3544
85°	2212	2530	2636



TEST NUMBER: P520278

CATALOG NUMBER: SQ4-F-125U-050D-840-1D-UNV-STD-W-8

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	140.4	1.0
10°-20°	399.8	2.8
20°-30°	600.5	4.2
30°-40°	716.8	5.1
40°-50°	734.5	5.2
50°-60°	655.1	4.6
60°-70°	487.9	3.4
70°-80°	264.8	1.9
80°-90°	65.0	0.5
90°-100°	731.8	5.2
100°-110°	1971.4	13.9
110°-120°	2068.9	14.6
120°-130°	1678.9	11.9
130°-140°	1316.7	9.3
140°-150°	1010.9	7.1
150°-160°	726.8	5.1
160°-170°	444.1	3.1
170°-180°	149.7	1.1
0°-30°	1140.7	8.1
0°-40°	1857.5	13.1
0°-60°	3247.1	22.9
0°-90°	4064.8	28.7
90°-120°	4772.2	33.7
90°-150°	8778.6	62.0
90°-180°	10099.0	71.3
0°-180°	14164.1	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1488	1488	1488	1488	1488	
5°	1486	1484	1468	1482	1480	141
15°	1426	1422	1408	1420	1420	402
25°	1311	1307	1295	1303	1307	604
35°	1155	1151	1141	1142	1147	721
45°	958	960	950	948	950	739
55°	743	743	733	727	729	662
65°	502	500	492	486	486	497
75°	257	255	249	245	243	272
85°	42	46	48	50	50	59
90°	4	12	24	26	26	9
95°	112	398	1200	614	424	117
105°	365	567	2180	3262	3061	383
115°	644	788	1816	3508	3968	633
125°	879	1009	1630	2755	3242	785
135°	1058	1181	1584	2223	2517	817
145°	1224	1319	1564	1900	2041	767
155°	1389	1440	1550	1705	1760	639
165°	1507	1524	1556	1618	1626	425
175°	1566	1564	1558	1580	1576	149
180°	1564	1564	1564	1564	1564	

TEST NUMBER: P520278

CATALOG NUMBER: SQ4-F-125U-050D-840-1D-UNV-STD-W-8

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1488.0	1488.0	1488.0	1488.0	1488.0
2.5°	1492.8	1489.6	1476.8	1488.0	1486.4
5°	1486.0	1484.0	1468.0	1481.9	1480.1
7.5°	1475.2	1471.4	1455.7	1469.2	1467.3
10°	1464.1	1460.2	1446.2	1458.1	1456.1
12.5°	1449.7	1447.4	1431.9	1443.8	1443.4
15°	1426.2	1422.4	1408.3	1420.2	1420.2
17.5°	1395.2	1392.8	1379.2	1390.7	1389.2
20°	1374.5	1370.5	1358.5	1368.4	1368.4
22.5°	1348.9	1346.7	1334.6	1343.0	1344.6
25°	1310.7	1306.8	1294.8	1302.8	1306.7
27.5°	1268.5	1265.4	1255.3	1260.6	1263.3
30°	1235.0	1235.0	1225.1	1227.1	1233.1
32.5°	1204.8	1204.8	1193.2	1195.2	1198.0
35°	1155.4	1151.4	1141.4	1141.6	1147.4
37.5°	1098.0	1096.0	1089.6	1088.4	1090.0
40°	1059.7	1057.7	1049.8	1051.7	1051.7
42.5°	1021.5	1019.5	1011.5	1008.8	1011.9
45°	958.2	960.1	950.2	948.2	950.2
47.5°	895.5	895.5	887.6	882.1	885.2
50°	852.5	852.5	844.6	840.6	840.6
52.5°	808.0	809.5	800.0	794.5	795.9
55°	743.0	743.0	733.0	727.1	729.1
57.5°	671.3	671.3	661.3	655.4	659.0
60°	623.5	623.5	613.5	607.6	609.6
62.5°	575.7	575.7	565.7	559.8	560.2
65°	502.0	500.0	492.0	486.0	486.0
67.5°	431.1	426.0	419.9	412.0	412.0
70°	378.4	376.5	370.5	362.6	362.6
72.5°	330.6	327.2	321.1	314.7	314.7
75°	257.0	255.0	249.0	244.9	243.1
77.5°	184.1	182.5	182.0	176.5	178.1
80°	139.4	139.4	137.5	133.4	133.4
82.5°	99.6	101.2	97.6	96.7	95.3
85°	41.8	45.8	47.8	49.8	49.8
87.5°	8.8	15.0	16.0	17.9	17.9
90°	3.9	11.7	23.9	26.0	26.0
92.5°	48.6	171.8	339.6	163.5	113.6
95°	111.6	398.0	1199.7	613.5	424.5
97.5°	178.2	455.7	1881.7	1571.9	1185.3
100°	229.2	478.6	2098.5	2195.6	1821.5
102.5°	278.6	510.9	2170.3	2662.7	2355.6
105°	364.7	567.4	2180.2	3261.8	3061.1
107.5°	446.0	626.9	2087.4	3569.6	3621.4
110°	500.3	671.7	2002.8	3665.3	3854.2



TEST NUMBER: P520278

CATALOG NUMBER: SQ4-F-125U-050D-840-1D-UNV-STD-W-8

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	557.6	716.7	1921.5	3644.1	3954.7
115°	643.7	787.9	1815.6	3508.0	3967.9
117.5°	722.2	857.5	1733.5	3290.7	3802.8
120°	773.3	903.8	1691.9	3134.8	3660.9
122.5°	817.9	946.9	1661.6	2975.3	3499.9
125°	878.9	1009.4	1630.2	2755.3	3242.4
127.5°	937.5	1066.0	1610.2	2561.2	2996.2
130°	972.5	1101.2	1602.3	2450.0	2831.9
132.5°	1007.6	1134.6	1594.3	2352.0	2702.7
135°	1058.3	1181.0	1584.4	2222.8	2517.0
137.5°	1106.5	1224.1	1579.1	2113.2	2354.8
140°	1140.0	1252.9	1574.4	2045.7	2263.9
142.5°	1175.0	1280.3	1571.2	1982.7	2166.6
145°	1223.6	1319.1	1564.4	1900.4	2040.7
147.5°	1276.2	1359.3	1557.6	1831.1	1941.5
150°	1311.3	1383.4	1554.5	1787.7	1879.3
152.5°	1343.2	1406.0	1552.9	1752.2	1826.7
155°	1389.0	1439.7	1550.4	1705.1	1759.7
157.5°	1429.3	1468.6	1550.8	1672.1	1708.7
160°	1454.8	1488.0	1552.5	1652.7	1680.0
162.5°	1477.1	1504.1	1554.1	1636.6	1656.1
165°	1506.6	1524.2	1556.4	1618.4	1626.2
167.5°	1530.5	1540.7	1558.4	1604.3	1607.5
170°	1546.5	1550.4	1558.4	1596.3	1596.3
172.5°	1556.1	1556.8	1560.0	1588.3	1588.3
175°	1566.4	1564.4	1558.4	1580.3	1576.4
177.5°	1570.8	1567.7	1559.6	1572.3	1569.2
180°	1564.4	1564.4	1564.4	1564.4	1564.4

(END OF REPORT)