

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P937520

Luminaire Tested: SQ4-FB-100U-075D-840-1D-UNV-STD-W-8

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P937520
REPORT IS A COMBINATION OF REPORTS P933582 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-100U-075D-840-1D-UNV-STD-W-8
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 12697.8 lumens
Efficiency: N/A
Efficacy: 129.0 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 8' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 98.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P937520
CATALOG NUMBER: SQ4-FB-100U-075D-840-1D-UNV-STD-W-8

Luminous Intensity Polar Plot

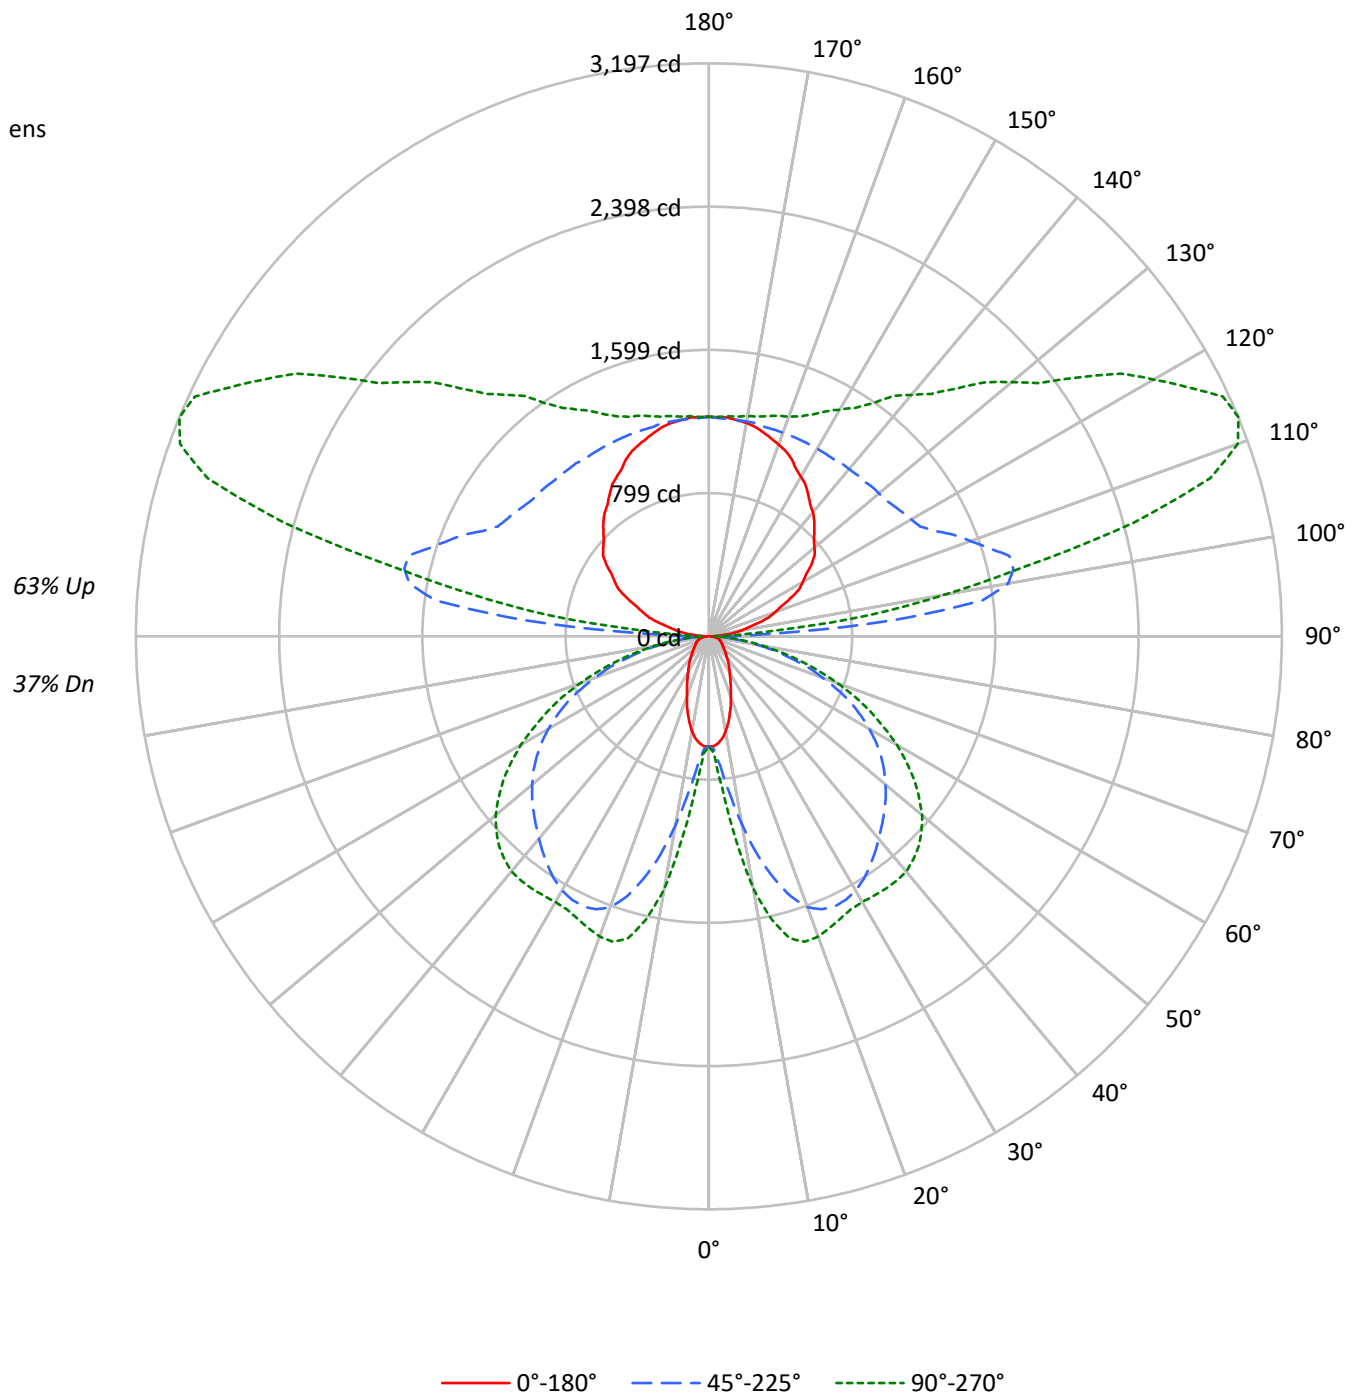



TEST NUMBER: P937520

CATALOG NUMBER: SQ4-FB-100U-075D-840-1D-UNV-STD-W-8

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	104	104	104	104	94	94	94	94	76	76	76	60	60	60	45	45	45	37				37
1	95	90	86	83	86	82	78	75	66	64	62	52	50	49	39	38	37	31				31
2	86	78	72	67	77	71	66	61	58	54	50	45	42	40	34	32	30	25				25
3	78	68	61	55	70	62	56	50	50	46	42	39	36	33	29	27	25	21				21
4	71	60	52	46	64	55	48	42	44	39	35	35	31	28	26	23	21	17				17
5	65	53	45	39	58	48	41	36	39	34	30	31	27	24	23	20	18	15				15
6	60	47	39	33	54	43	36	31	35	30	26	28	24	21	21	18	16	13				13
7	55	42	34	29	49	39	32	27	32	26	22	25	21	18	19	16	14	11				11
8	51	38	31	25	46	35	28	23	29	23	20	23	19	16	17	14	12	10				10
9	47	35	27	22	42	32	25	21	26	21	17	21	17	14	16	13	11	9				9
10	44	32	24	20	40	29	23	18	24	19	15	19	15	12	14	12	10	8				8

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2851	2851	2851
5°	2785	3295	3832
10°	2527	4804	6354
15°	2148	6277	7672
20°	1748	7273	7819
25°	1458	7611	7660
30°	1230	7659	7646
35°	1087	7532	7844
40°	948	7367	8048
45°	858	7246	8080
50°	787	7137	7946
55°	753	6977	7594
60°	772	6670	7038
65°	803	6205	6273
70°	855	5411	5300
75°	947	4412	4136
80°	1035	3060	2787
85°	922	1624	1426

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 8080 cd/sqm



TEST NUMBER: P937520

CATALOG NUMBER: SQ4-FB-100U-075D-840-1D-UNV-STD-W-8

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	79.5	0.6
10°-20°	352.3	2.8
20°-30°	616.3	4.9
30°-40°	793.3	6.2
40°-50°	886.1	7.0
50°-60°	848.7	6.7
60°-70°	672.6	5.3
70°-80°	395.5	3.1
80°-90°	114.5	0.9
90°-100°	597.0	4.7
100°-110°	1569.4	12.4
110°-120°	1627.3	12.8
120°-130°	1305.3	10.3
130°-140°	1024.2	8.1
140°-150°	786.1	6.2
150°-160°	566.1	4.5
160°-170°	346.4	2.7
170°-180°	117.0	0.9
0°-30°	1048.1	8.3
0°-40°	1841.5	14.5
0°-60°	3576.3	28.2
0°-90°	4758.9	37.5
90°-120°	3793.7	29.9
90°-150°	6909.3	54.4
90°-180°	7939.0	62.5
0°-180°	12697.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	614	614	614	614	614	
5°	599	642	723	818	848	55
15°	449	828	1395	1692	1745	125
25°	286	939	1662	1735	1737	132
35°	194	897	1565	1654	1719	121
45°	132	715	1383	1585	1656	102
55°	95	454	1174	1364	1401	86
65°	75	241	871	980	994	74
75°	55	148	478	526	528	58
85°	20	45	119	130	132	21
90°	8	23	62	31	31	8
95°	79	309	1028	530	361	88
105°	283	428	1735	2634	2458	300
115°	502	610	1390	2772	3164	496
125°	699	783	1264	2136	2520	620
135°	833	916	1225	1724	1955	644
145°	966	1027	1209	1471	1586	605
155°	1091	1122	1209	1327	1366	502
165°	1178	1193	1209	1257	1272	332
175°	1225	1225	1217	1233	1233	116
180°	1225	1225	1225	1225	1225	



TEST NUMBER: P937520

CATALOG NUMBER: SQ4-FB-100U-075D-840-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	614.5	614.5	614.5	614.5	614.5	614.5	614.5	614.5	614.5	614.5	614.5
2.5°	614.5	614.5	618.5	620.5	624.4	626.4	630.3	634.3	646.2	648.1	652.1
5°	598.7	606.6	632.3	642.2	669.9	707.4	723.2	748.9	802.3	818.1	827.9
7.5°	575.0	592.8	656.0	671.8	741.0	839.8	881.3	936.6	1021.6	1063.1	1096.7
10°	537.5	575.0	687.6	725.2	837.8	988.0	1065.1	1142.2	1270.7	1328.0	1349.7
12.5°	496.0	557.2	721.2	772.6	934.6	1154.1	1247.0	1331.9	1478.1	1555.2	1567.1
15°	448.6	531.5	752.9	827.9	1037.4	1292.4	1395.2	1499.9	1636.2	1691.6	1705.4
17.5°	407.1	511.8	782.5	861.5	1116.4	1416.9	1521.6	1608.6	1719.2	1756.8	1766.6
20°	355.7	480.2	802.3	905.0	1199.5	1507.8	1608.6	1675.7	1750.8	1774.5	1778.5
22.5°	318.1	446.6	814.1	920.8	1254.9	1563.1	1648.1	1701.4	1752.8	1760.7	1762.7
25°	286.5	409.0	812.1	938.6	1302.3	1596.7	1661.9	1701.4	1731.1	1735.0	1735.0
27.5°	256.9	367.5	804.2	942.6	1337.9	1604.6	1656.0	1683.7	1697.5	1705.4	1705.4
30°	231.2	328.0	784.5	934.6	1353.7	1596.7	1638.2	1652.0	1665.9	1677.7	1683.7
32.5°	211.4	290.5	754.8	918.8	1355.6	1576.9	1606.6	1614.5	1634.3	1661.9	1671.8
35°	193.6	252.9	721.2	897.1	1343.8	1545.3	1565.1	1573.0	1612.5	1654.0	1667.8
37.5°	175.9	225.3	677.8	859.6	1326.0	1507.8	1521.6	1535.5	1596.7	1646.1	1661.9
40°	158.1	201.6	626.4	818.1	1298.3	1462.3	1474.2	1495.9	1576.9	1634.3	1650.1
42.5°	144.2	181.8	571.1	774.6	1262.8	1411.0	1428.7	1460.4	1553.2	1614.5	1632.3
45°	132.4	162.0	511.8	715.3	1217.3	1357.6	1383.3	1426.8	1525.6	1584.9	1600.7
47.5°	120.5	148.2	450.5	654.1	1167.9	1304.3	1337.9	1387.3	1488.0	1545.3	1559.2
50°	110.7	134.4	389.3	588.8	1114.5	1247.0	1286.5	1337.9	1440.6	1494.0	1511.7
52.5°	102.8	122.5	332.0	523.6	1053.2	1187.7	1233.1	1286.5	1383.3	1434.7	1446.5
55°	94.8	112.6	282.6	454.5	990.0	1124.4	1173.8	1225.2	1320.1	1363.5	1371.4
57.5°	90.9	104.7	241.1	389.3	922.8	1053.2	1108.5	1156.1	1245.0	1278.6	1286.5
60°	85.0	98.8	209.5	333.9	849.7	986.0	1033.4	1080.9	1156.1	1183.7	1189.7
62.5°	79.0	94.8	185.7	280.6	774.6	907.0	954.4	997.9	1061.1	1080.9	1088.8
65°	75.1	90.9	168.0	241.1	697.5	824.0	871.4	909.0	960.3	980.1	984.0
67.5°	71.1	86.9	154.1	207.5	620.5	741.0	776.6	812.1	851.7	871.4	873.4
70°	65.2	83.0	142.3	183.8	541.4	646.2	675.8	713.3	745.0	754.8	760.8
72.5°	61.3	77.1	134.4	166.0	460.4	555.3	582.9	604.7	632.3	642.2	642.2
75°	55.3	69.2	126.5	148.2	377.4	454.5	478.2	499.9	521.7	525.6	519.7
77.5°	49.4	61.3	108.7	124.5	294.4	359.6	379.4	391.2	409.0	413.0	415.0
80°	41.5	53.4	85.0	96.8	213.4	264.8	278.6	288.5	304.3	304.3	308.3
82.5°	31.6	41.5	61.3	69.2	144.2	181.8	193.6	199.6	209.5	209.5	209.5
85°	19.8	25.7	39.5	45.4	86.9	110.7	118.6	120.5	128.4	130.4	130.4
87.5°	9.9	13.8	25.7	27.7	45.4	57.3	57.3	61.3	61.3	59.3	57.3
90°	8.2	14.8	21.3	23.0	36.2	53.6	62.4	55.5	41.6	31.2	31.2
92.5°	32.9	88.8	144.7	158.7	223.0	308.8	351.7	308.3	221.4	156.2	150.0
95°	78.9	181.2	283.5	309.0	548.7	868.4	1028.2	917.6	696.1	530.2	511.4
97.5°	136.4	226.6	317.0	339.5	739.2	1272.1	1538.6	1468.7	1328.8	1223.8	1188.1
100°	180.8	262.6	344.5	365.0	808.5	1399.9	1695.6	1700.7	1710.9	1718.6	1675.9
102.5°	218.6	294.9	371.3	390.4	840.2	1440.0	1740.0	1829.1	2007.4	2141.1	2104.5
105°	282.8	347.4	412.0	428.2	863.8	1444.7	1735.0	1934.8	2334.4	2634.2	2614.5
107.5°	348.5	408.7	469.0	484.1	868.3	1380.3	1636.4	1915.1	2472.6	2890.6	2895.3
110°	392.8	447.3	501.7	515.3	861.6	1323.3	1554.2	1865.8	2489.0	2956.4	2976.8



TEST NUMBER: P937520

CATALOG NUMBER: SQ4-FB-100U-075D-840-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	436.4	488.3	540.2	553.2	861.9	1273.6	1479.4	1798.4	2436.1	2914.5	2945.9
115°	502.2	550.0	597.9	609.9	869.8	1216.5	1389.8	1697.1	2311.5	2772.3	2815.9
117.5°	567.1	610.6	654.1	664.9	886.0	1180.8	1328.2	1605.4	2160.0	2575.8	2624.1
120°	605.0	645.9	686.8	696.9	899.2	1168.8	1303.6	1556.9	2063.5	2443.5	2490.5
122.5°	641.9	683.2	724.5	734.8	918.0	1162.4	1284.6	1512.7	1969.0	2311.2	2357.6
125°	698.6	736.3	773.9	783.3	943.5	1157.2	1264.0	1457.9	1845.5	2136.2	2178.8
127.5°	744.7	782.6	820.6	830.1	969.0	1154.3	1246.9	1413.2	1746.0	1995.6	2031.5
130°	769.3	810.2	851.1	861.3	987.6	1156.1	1240.2	1388.3	1684.6	1906.8	1940.0
132.5°	794.7	835.7	876.6	886.8	1002.7	1157.2	1234.5	1367.1	1632.3	1831.2	1860.9
135°	832.6	869.8	907.2	916.5	1019.2	1156.2	1224.6	1335.7	1557.8	1724.4	1750.0
137.5°	871.2	908.1	945.0	954.2	1043.8	1163.3	1222.9	1316.8	1504.6	1645.4	1666.5
140°	903.2	937.2	971.2	979.7	1058.8	1164.5	1217.2	1298.3	1460.6	1582.2	1601.8
142.5°	927.9	959.3	990.8	998.6	1071.5	1168.6	1217.2	1288.5	1430.9	1537.8	1554.7
145°	965.8	993.1	1020.6	1027.4	1088.0	1168.7	1209.0	1267.3	1383.8	1471.2	1484.0
147.5°	1003.5	1030.2	1056.9	1063.6	1112.1	1176.7	1209.0	1254.9	1346.5	1415.3	1425.9
150°	1028.2	1052.3	1076.4	1082.5	1124.6	1180.9	1209.0	1247.7	1325.2	1383.3	1391.9
152.5°	1053.7	1072.0	1090.3	1094.8	1132.8	1183.6	1209.0	1242.1	1308.2	1357.8	1364.3
155°	1091.4	1105.0	1118.5	1121.9	1150.9	1189.7	1209.0	1235.3	1288.0	1327.4	1331.6
157.5°	1119.4	1132.5	1145.8	1149.0	1169.0	1195.7	1209.0	1229.5	1270.4	1301.1	1304.1
160°	1138.4	1148.6	1158.8	1161.4	1177.3	1198.4	1209.0	1226.6	1261.7	1288.0	1289.7
162.5°	1157.2	1165.0	1172.7	1174.5	1186.0	1201.3	1209.0	1223.8	1253.4	1275.6	1277.3
165°	1177.8	1184.7	1191.6	1193.4	1198.6	1205.6	1209.0	1219.6	1240.8	1256.7	1258.5
167.5°	1196.7	1199.9	1203.3	1204.1	1208.4	1214.3	1217.2	1224.1	1238.1	1248.4	1249.1
170°	1209.0	1212.3	1215.6	1216.4	1216.7	1217.0	1217.2	1224.1	1238.1	1248.4	1248.4
172.5°	1215.6	1216.3	1217.0	1217.2	1217.2	1217.2	1217.2	1222.7	1233.7	1241.9	1241.3
175°	1224.6	1224.6	1224.6	1224.6	1222.2	1218.9	1217.2	1220.7	1227.6	1232.8	1232.8
177.5°	1224.6	1224.6	1224.6	1224.6	1222.7	1220.2	1218.9	1221.7	1227.1	1231.2	1230.6
180°	1224.6	1224.6	1224.6	1224.6	1224.6	1224.6	1224.6	1224.6	1224.6	1224.6	1224.6



TEST NUMBER: P937520

CATALOG NUMBER: SQ4-FB-100U-075D-840-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	614.5	614.5
2.5°	656.0	652.1
5°	843.8	847.7
7.5°	1136.3	1134.3
10°	1412.9	1430.7
12.5°	1614.5	1618.4
15°	1737.0	1744.9
17.5°	1784.4	1786.4
20°	1786.4	1782.5
22.5°	1764.7	1760.7
25°	1739.0	1737.0
27.5°	1715.3	1717.2
30°	1705.4	1711.3
32.5°	1705.4	1715.3
35°	1709.3	1719.2
37.5°	1707.4	1719.2
40°	1699.5	1713.3
42.5°	1677.7	1687.6
45°	1644.1	1656.0
47.5°	1600.7	1608.6
50°	1545.3	1553.2
52.5°	1476.2	1478.1
55°	1393.2	1401.1
57.5°	1304.3	1306.2
60°	1205.5	1211.4
62.5°	1100.6	1100.6
65°	990.0	993.9
67.5°	875.4	885.2
70°	758.8	760.8
72.5°	644.2	644.2
75°	525.6	527.6
77.5°	413.0	413.0
80°	306.3	308.3
82.5°	211.4	215.4
85°	132.4	132.4
87.5°	61.3	55.3
90°	31.2	31.2
92.5°	125.2	100.3
95°	436.1	360.8
97.5°	1044.8	901.6
100°	1505.4	1334.8
102.5°	1958.4	1812.3
105°	2536.0	2457.5
107.5°	2914.4	2933.4
110°	3058.7	3140.5



TEST NUMBER: P937520

CATALOG NUMBER: SQ4-FB-100U-075D-840-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	3071.5	3197.2
115°	2990.1	3164.4
117.5°	2817.4	3010.6
120°	2678.3	2866.0
122.5°	2542.7	2727.9
125°	2349.4	2520.0
127.5°	2175.5	2319.4
130°	2073.0	2206.0
132.5°	1980.1	2099.1
135°	1852.7	1955.4
137.5°	1750.4	1834.5
140°	1680.3	1758.8
142.5°	1622.3	1689.9
145°	1535.2	1586.2
147.5°	1468.3	1510.7
150°	1426.2	1460.6
152.5°	1390.2	1416.1
155°	1348.8	1366.0
157.5°	1316.1	1328.2
160°	1296.7	1303.6
162.5°	1283.8	1290.4
165°	1265.4	1272.3
167.5°	1252.1	1255.1
170°	1248.4	1248.4
172.5°	1238.8	1236.2
175°	1232.8	1232.8
177.5°	1227.6	1224.6
180°	1224.6	1224.6



TEST NUMBER: P937520
 CATALOG NUMBER: SQ4-FB-100U-075D-840-1D-UNV-STD-W-8

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	3.38	4.16	4.43	5.22	6.66	16.56	17.34	17.61	18.40	19.84
	3H	4.08	4.78	5.14	5.85	7.31	18.39	19.10	19.45	20.16	21.62
	4H	4.37	5.04	5.44	6.11	7.57	19.03	19.70	20.10	20.77	22.23
	6H	4.62	5.24	5.70	6.31	7.78	19.46	20.08	20.54	21.15	22.62
	8H	4.69	5.27	5.77	6.36	7.83	19.58	20.16	20.66	21.25	22.72
	12H	4.70	5.26	5.79	6.34	7.84	19.64	20.20	20.73	21.29	22.78
4H	2H	10.58	11.25	11.66	12.32	13.79	16.82	17.49	17.90	18.56	20.02
	3H	12.14	12.70	13.23	13.80	15.28	18.86	19.42	19.95	20.52	21.99
	4H	12.24	12.75	13.33	13.84	15.33	19.62	20.14	20.72	21.23	22.72
	6H	12.24	12.68	13.34	13.80	15.28	20.16	20.60	21.26	21.71	23.20
	8H	12.22	12.63	13.32	13.73	15.24	20.32	20.73	21.42	21.84	23.34
	12H	12.17	12.54	13.29	13.66	15.17	20.41	20.78	21.53	21.90	23.41
8H	4H	13.67	14.09	14.77	15.19	16.70	19.68	20.09	20.78	21.19	22.70
	6H	13.91	14.25	15.04	15.40	16.90	20.30	20.65	21.43	21.79	23.29
	8H	13.93	14.23	15.06	15.36	16.88	20.52	20.82	21.65	21.95	23.47
	12H	13.89	14.16	15.03	15.28	16.84	20.66	20.93	21.80	22.05	23.61
12H	4H	13.81	14.19	14.93	15.30	16.81	19.63	20.00	20.74	21.12	22.63
	6H	14.17	14.47	15.30	15.60	17.12	20.29	20.59	21.41	21.71	23.23
	8H	14.24	14.50	15.37	15.62	17.18	20.51	20.78	21.65	21.90	23.46