

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: CORELITE

Report Number: P520083

Luminaire Tested: **SQ4-F-0U-050D-840-1D-UNV-STD-W-12**

Issue Date: 4/29/2021

**Test Information**

Test Method: LM-79-2019  
Report Number: P520083  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-536-17)  
Test Lab: INNOVATION CENTER  
Issue Date: 4/29/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: CORELITE  
Catalog Number: SQ4-F-0U-050D-840-1D-UNV-STD-W-12  
Description: CORELITE SQ4 SUSPENDED LED LUMINAIRE  
DOWNLIGHT 500 LUMENS PER FOOT  
DIRECT ONLY  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 6091.8 lumens  
Efficiency: N/A  
Efficacy: 117.8 lumens/watt  
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.35  
Luminous Opening: Rectangular (W 0.29' x L: 12' x H: 0')  
CIE Type: Direct

Input Watts (W): 51.7  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P520083  
CATALOG NUMBER: SQ4-F-0U-050D-840-1D-UNV-STD-W-12

### Luminous Intensity Polar Plot

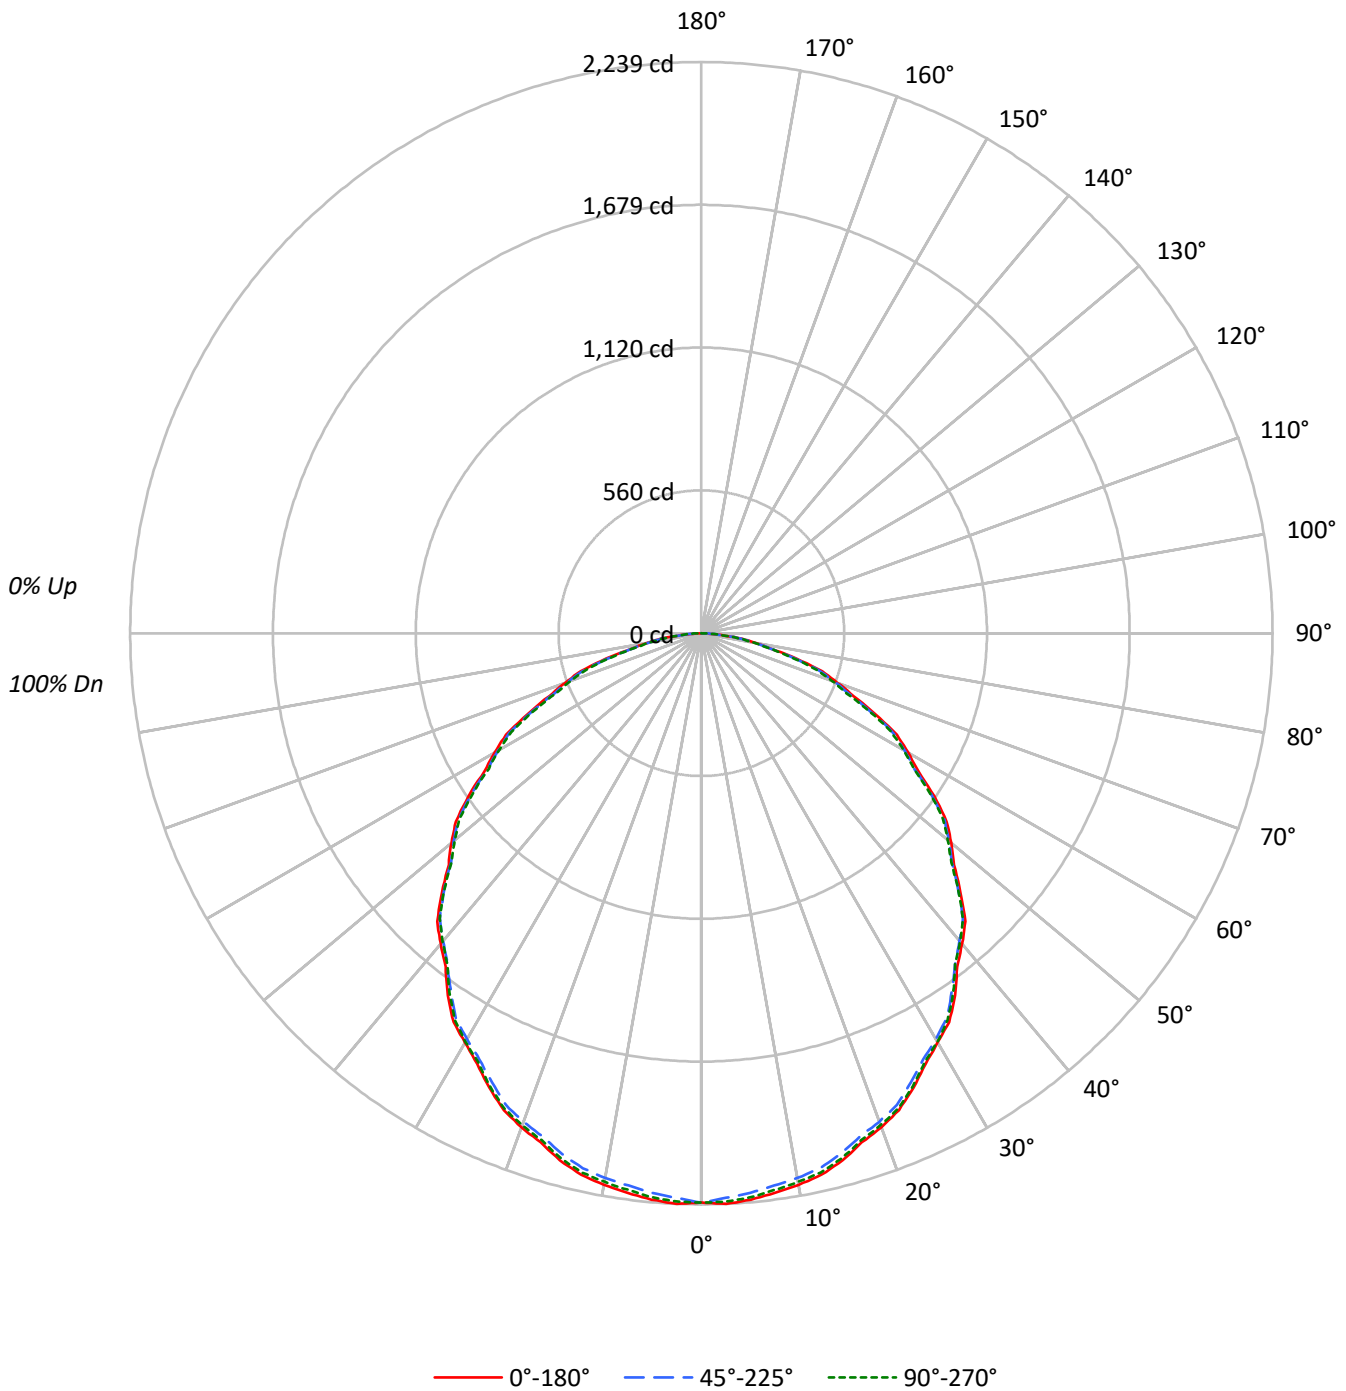



TEST NUMBER: P520083

CATALOG NUMBER: SQ4-F-0U-050D-840-1D-UNV-STD-W-12

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	104	100	96	106	102	98	95	98	95	92	94	91	89	90	88	86	84
2	99	91	84	79	97	89	83	78	86	80	76	82	78	74	79	76	72	70
3	90	80	72	65	88	78	71	65	75	69	64	73	67	63	70	65	61	59
4	83	71	62	55	81	70	61	55	67	60	54	65	59	54	63	57	53	51
5	76	63	54	48	74	62	54	48	60	53	47	58	52	46	56	51	46	44
6	70	57	48	42	68	56	48	42	54	47	41	53	46	41	51	45	40	38
7	65	52	43	37	64	51	43	37	49	42	36	48	41	36	47	41	36	34
8	61	47	39	33	59	47	38	33	45	38	33	44	37	32	43	37	32	30
9	57	43	35	30	55	43	35	30	42	34	29	41	34	29	40	34	29	27
10	53	40	32	27	52	40	32	27	39	32	27	38	31	27	37	31	26	25

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	6864	6864	6864
5°	6881	6798	6853
10°	6858	6774	6821
15°	6811	6726	6783
20°	6747	6669	6718
25°	6672	6590	6651
30°	6579	6526	6568
35°	6506	6428	6462
40°	6382	6321	6334
45°	6251	6199	6199
50°	6118	6061	6033
55°	5976	5896	5863
60°	5752	5661	5624
65°	5480	5371	5306
70°	5105	4997	4890
75°	4579	4438	4331
80°	3703	3652	3546
85°	2212	2530	2636



TEST NUMBER: P520083

CATALOG NUMBER: SQ4-F-0U-050D-840-1D-UNV-STD-W-12

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	210.6	3.5
10°-20°	599.7	9.8
20°-30°	900.7	14.8
30°-40°	1075.2	17.7
40°-50°	1101.8	18.1
50°-60°	982.6	16.1
60°-70°	731.8	12.0
70°-80°	397.3	6.5
80°-90°	92.0	1.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1711.0	28.1
0°-40°	2786.3	45.7
0°-60°	4870.7	80.0
0°-90°	6091.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6091.8	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2232	2232	2232	2232	2232	
5°	2229	2226	2202	2223	2220	212
15°	2139	2134	2112	2130	2130	603
25°	1966	1960	1942	1954	1960	905
35°	1733	1727	1712	1712	1721	1081
45°	1437	1440	1425	1422	1425	1109
55°	1114	1114	1100	1091	1094	993
65°	753	750	738	729	729	746
75°	385	382	374	367	364	407
85°	63	69	72	75	75	89
90°	0	0	0	0	0	



TEST NUMBER: P520083

CATALOG NUMBER: SQ4-F-0U-050D-840-1D-UNV-STD-W-12

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	2231.9	2231.9	2231.9	2231.9	2231.9
2.5°	2239.1	2234.5	2215.3	2231.9	2229.6
5°	2229.0	2226.1	2202.1	2223.0	2220.0
7.5°	2212.9	2207.0	2183.6	2203.8	2200.9
10°	2196.1	2190.3	2169.2	2187.1	2184.2
12.5°	2174.6	2171.1	2147.7	2165.7	2165.1
15°	2139.3	2133.5	2112.4	2130.4	2130.4
17.5°	2092.7	2089.3	2068.8	2086.1	2083.8
20°	2061.6	2055.8	2037.8	2052.7	2052.7
22.5°	2023.4	2019.9	2001.9	2014.5	2016.9
25°	1966.1	1960.2	1942.1	1954.3	1960.1
27.5°	1902.7	1898.1	1883.0	1890.9	1894.9
30°	1852.5	1852.5	1837.6	1840.8	1849.5
32.5°	1807.1	1807.1	1789.8	1792.8	1797.0
35°	1733.0	1727.2	1712.1	1712.3	1721.1
37.5°	1646.9	1644.1	1634.4	1632.6	1635.0
40°	1589.6	1586.7	1574.6	1577.6	1577.6
42.5°	1532.2	1529.3	1517.2	1513.2	1517.8
45°	1437.2	1440.1	1425.2	1422.3	1425.2
47.5°	1343.4	1343.4	1331.4	1323.2	1327.8
50°	1278.8	1278.8	1266.9	1260.9	1260.9
52.5°	1211.9	1214.2	1199.9	1191.6	1194.0
55°	1114.5	1114.5	1099.6	1090.7	1093.5
57.5°	1007.0	1007.0	992.0	983.2	988.4
60°	935.2	935.2	920.3	911.4	914.3
62.5°	863.5	863.5	848.6	839.6	840.2
65°	753.0	750.0	738.1	729.1	729.1
67.5°	646.6	639.0	629.9	617.9	617.9
70°	567.7	564.8	555.7	543.8	543.8
72.5°	496.0	490.8	481.7	472.1	472.1
75°	385.4	382.5	373.5	367.4	364.5
77.5°	276.1	273.7	273.1	264.8	267.1
80°	209.1	209.1	206.2	200.2	200.2
82.5°	149.4	151.8	146.4	145.1	142.8
85°	62.7	68.6	71.7	74.7	74.7
87.5°	11.9	18.9	16.8	19.1	19.1
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)