

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: CORELITE

Report Number: P519712

Luminaire Tested: **SQ4-075U-0D-940-1D-UNV-STD-W-4**

Issue Date: 4/29/2021

Test Information

Test Method: LM-79-2019
Report Number: P519712
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-536-22)
Test Lab: INNOVATION CENTER
Issue Date: 4/29/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: CORELITE
Catalog Number: SQ4-075U-0D-940-1D-UNV-STD-W-4
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE
UPLIGHT 750 LUMENS PER FOOT
Light Source: 4000K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2588.0 lumens
Efficiency: N/A
Efficacy: 139.9 lumens/watt
N/A
Luminous Opening: Rectangular (W 0.29' x L: 4' x H: 0')
CIE Type: Indirect

Input Watts (W): 18.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P519712
CATALOG NUMBER: SQ4-075U-0D-940-1D-UNV-STD-W-4

Luminous Intensity Polar Plot

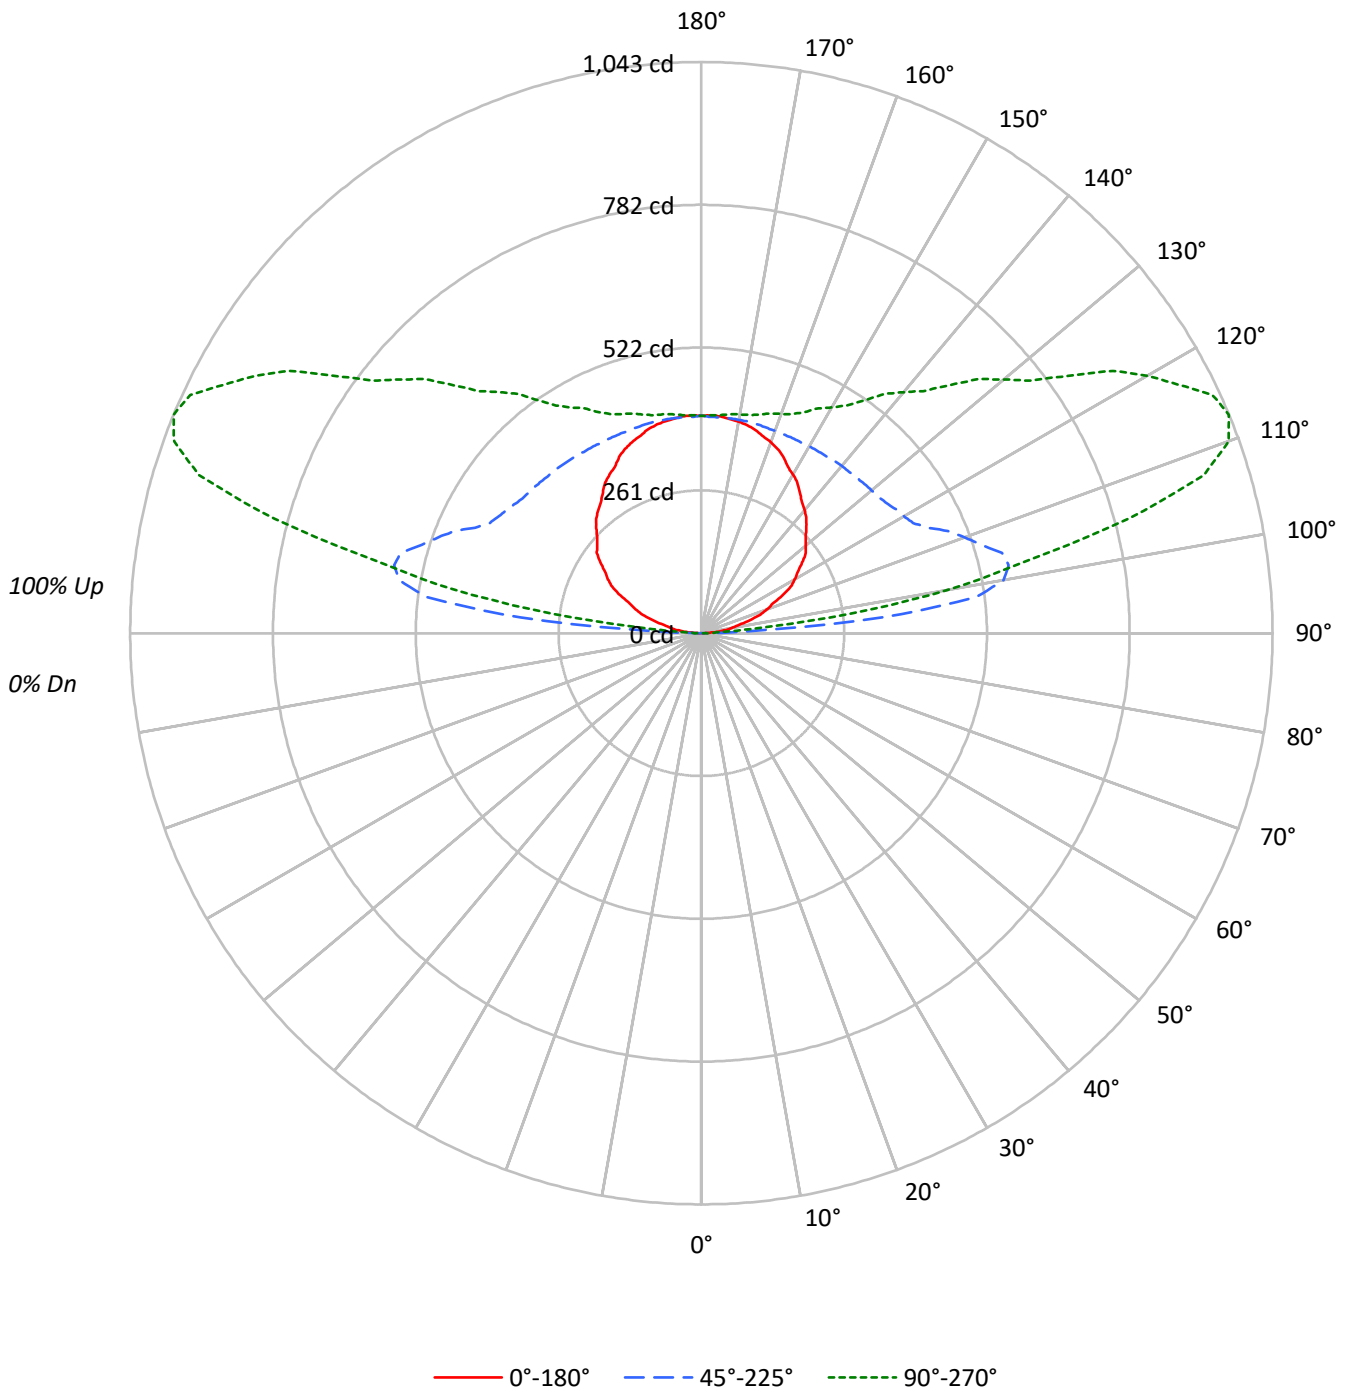



TEST NUMBER: P519712

CATALOG NUMBER: SQ4-075U-0D-940-1D-UNV-STD-W-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20								20				20				20				20
RC	80								50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10				0
RCR																					
0	95	95	95	95	81	81	81	81	56	56	56	32	32	32	10	10	10				0
1	87	83	79	76	74	71	68	65	48	47	45	28	27	26	9	9	8				0
2	79	72	66	62	67	62	57	53	42	40	37	24	23	22	8	7	7				0
3	72	63	57	51	61	54	49	44	37	34	31	21	20	18	7	6	6				0
4	65	56	48	43	56	48	42	37	33	29	26	19	17	16	6	6	5				0
5	60	49	42	36	51	42	36	32	29	25	22	17	15	13	5	5	4				0
6	55	44	36	31	47	38	32	27	26	22	19	15	13	11	5	4	4				0
7	50	39	32	27	43	34	28	23	23	19	17	14	11	10	4	4	3				0
8	47	35	28	23	40	30	24	20	21	17	14	12	10	9	4	3	3				0
9	43	32	25	20	37	27	22	18	19	15	13	11	9	8	4	3	3				0
10	40	29	22	18	34	25	19	16	17	14	11	10	8	7	3	3	2				0

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
95°	2953	35071	9570
100°	3098	29775	24520
105°	3283	20248	28775
110°	3442	13795	27637
115°	3561	9946	22475
120°	3633	7877	17343
125°	3616	6648	13176
130°	3567	5823	10337
135°	3540	5239	8349
140°	3532	4806	6923
145°	3532	4456	5846
150°	3566	4196	5070
155°	3614	4001	4535
160°	3644	3859	4183
165°	3665	3770	3948
170°	3674	3706	3801
175°	3680	3664	3703



TEST NUMBER: P519712

CATALOG NUMBER: SQ4-075U-0D-940-1D-UNV-STD-W-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	0.0	0.0
10°-20°	0.0	0.0
20°-30°	0.0	0.0
30°-40°	0.0	0.0
40°-50°	0.0	0.0
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	187.4	7.2
100°-110°	515.5	19.9
110°-120°	532.1	20.6
120°-130°	426.3	16.5
130°-140°	334.8	12.9
140°-150°	256.6	9.9
150°-160°	184.5	7.1
160°-170°	112.8	4.4
170°-180°	38.0	1.5
0°-30°	0.0	0.0
0°-40°	0.0	0.0
0°-60°	0.0	0.0
0°-90°	0.0	0.0
90°-120°	1235.0	47.7
90°-150°	2252.7	87.0
90°-180°	2588.0	100.0
0°-180°	2588.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
90°	1	3	6	8	8	
95°	28	102	331	142	90	31
105°	92	142	568	865	807	97
115°	163	199	456	907	1030	161
125°	225	256	413	699	819	201
135°	271	301	402	566	640	209
145°	314	335	396	482	519	197
155°	355	367	393	433	446	163
165°	384	389	395	411	413	108
175°	397	398	396	401	400	38
180°	397	397	397	397	397	



TEST NUMBER: P519712

CATALOG NUMBER: SQ4-075U-0D-940-1D-UNV-STD-W-4

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
90°	0.8	3.3	5.9	7.6	7.6
92.5°	11.7	49.8	86.4	33.2	27.2
95°	27.9	102.3	331.3	141.7	90.4
97.5°	45.5	113.4	505.6	389.6	274.9
100°	58.3	120.3	560.4	565.6	461.5
102.5°	70.5	128.5	574.6	701.8	606.2
105°	92.1	141.7	568.0	865.1	807.2
107.5°	112.8	158.0	535.7	945.1	962.2
110°	127.6	169.0	511.4	964.9	1024.5
112.5°	141.2	181.2	487.0	952.1	1042.7
115°	163.1	198.7	455.6	907.2	1029.5
117.5°	184.1	216.8	435.6	844.2	982.5
120°	196.9	228.4	426.9	796.9	939.9
122.5°	208.4	239.8	420.8	755.5	891.2
125°	224.8	256.2	413.3	699.2	819.1
127.5°	240.4	270.3	408.4	652.2	757.4
130°	248.5	279.1	405.7	624.3	720.2
132.5°	258.0	288.6	403.7	599.7	686.4
135°	271.3	301.1	401.5	565.5	639.9
137.5°	283.8	311.4	399.6	537.8	599.1
140°	293.3	318.9	399.0	519.4	574.8
142.5°	301.4	325.1	397.6	503.0	550.4
145°	313.6	335.1	395.6	481.8	519.0
147.5°	326.6	345.1	394.6	463.0	492.8
150°	334.7	351.3	393.9	452.7	475.9
152.5°	342.2	357.4	393.2	443.9	463.0
155°	355.0	366.6	393.0	433.1	445.5
157.5°	364.3	373.7	393.0	424.2	432.8
160°	371.1	378.5	393.0	419.4	426.0
162.5°	376.5	382.6	393.7	415.3	420.6
165°	383.7	388.7	394.7	410.9	413.3
167.5°	388.8	392.6	395.6	407.1	407.8
170°	392.2	394.7	395.6	405.7	405.7
172.5°	394.9	396.1	395.6	403.7	403.0
175°	397.3	398.1	395.6	400.6	399.8
177.5°	397.9	397.9	395.2	399.3	397.9
180°	397.3	397.3	397.3	397.3	397.3

(END OF REPORT)