

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: CORELITE

Report Number: P519738

Luminaire Tested: **SQ4-100U-0D-940-1D-UNV-STD-W-8**

Issue Date: 4/29/2021

Test Information

Test Method: LM-79-2019
Report Number: P519738
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-536-23)
Test Lab: INNOVATION CENTER
Issue Date: 4/29/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: CORELITE
Catalog Number: SQ4-100U-0D-940-1D-UNV-STD-W-8
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE
UPLIGHT 1000 LUMENS PER FOOT
Light Source: 4000K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6944.1 lumens
Efficiency: N/A
Efficacy: 140.3 lumens/watt
N/A
Luminous Opening: Rectangular (W 0.29' x L: 8' x H: 0')
CIE Type: Indirect

Input Watts (W): 49.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P519738
CATALOG NUMBER: SQ4-100U-0D-940-1D-UNV-STD-W-8

Luminous Intensity Polar Plot

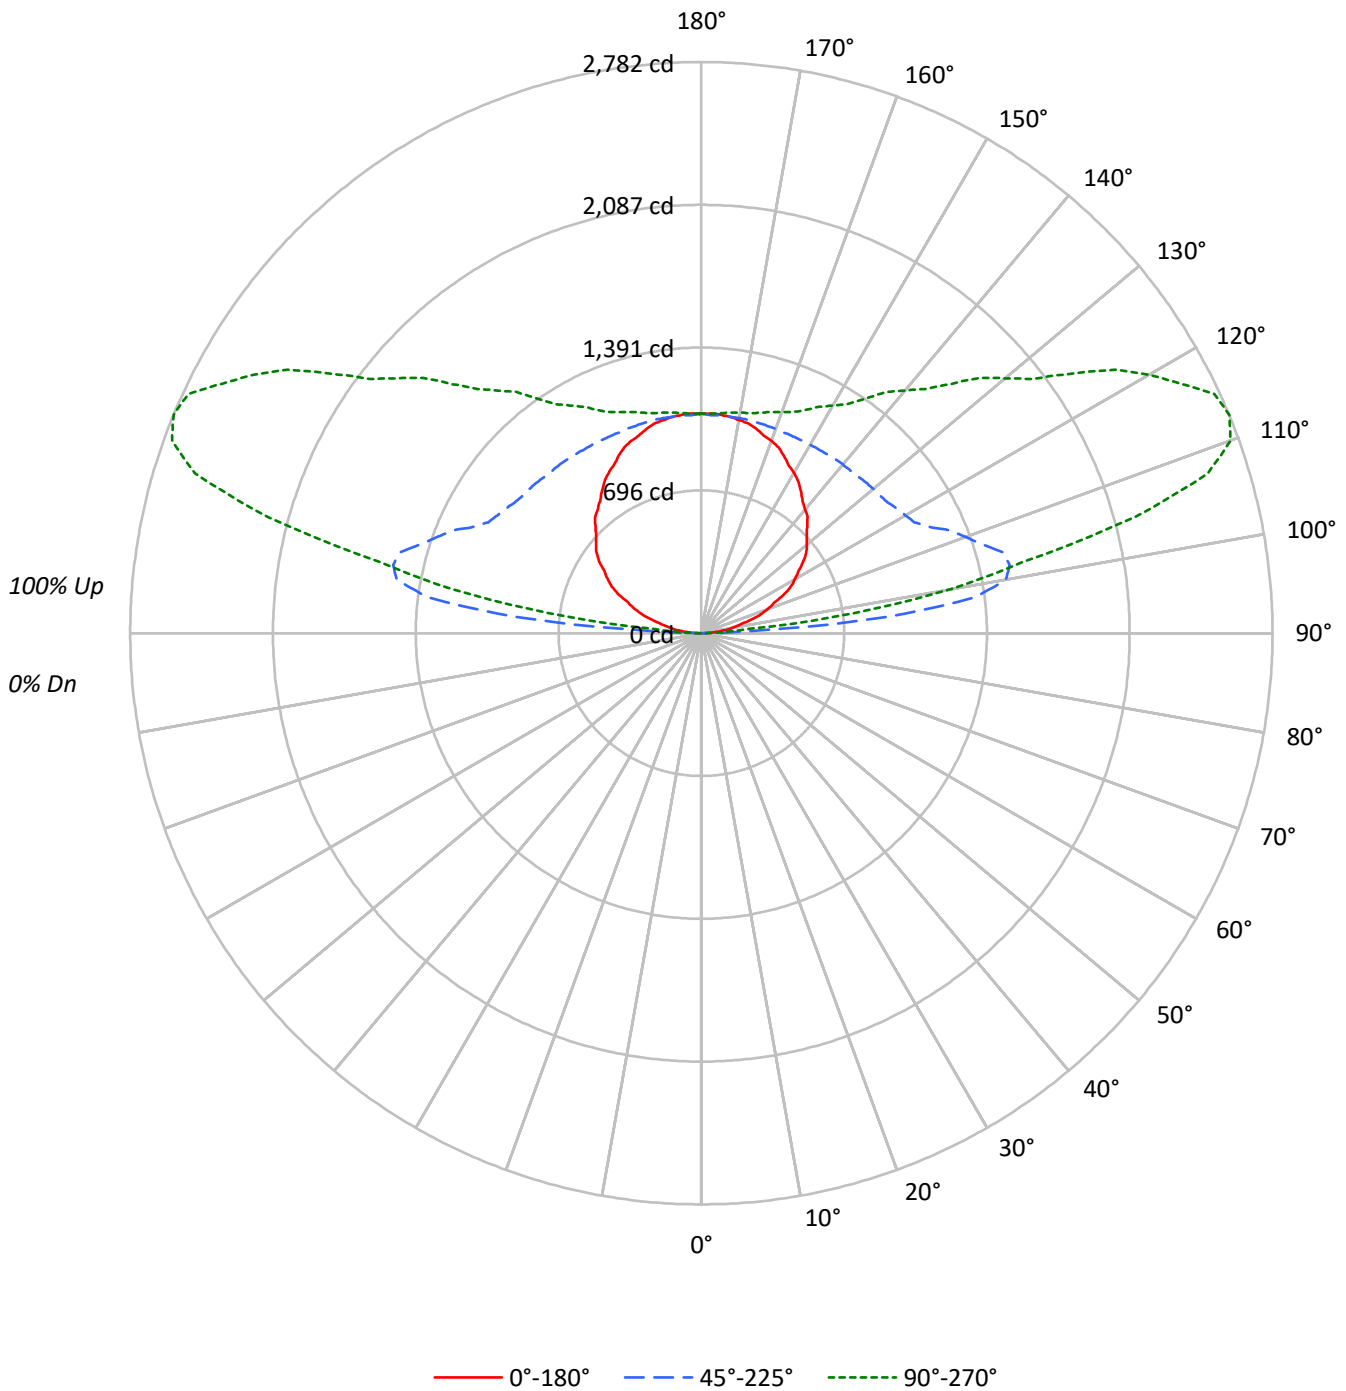



TEST NUMBER: P519738

CATALOG NUMBER: SQ4-100U-0D-940-1D-UNV-STD-W-8

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20								20				20				20				20
RC	80								50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10				0
RCR																					
0	95	95	95	95	81	81	81	81	56	56	56	32	32	32	10	10	10				0
1	87	83	79	76	74	71	68	65	48	47	45	28	27	26	9	9	8				0
2	79	72	66	62	67	62	57	53	42	40	37	24	23	22	8	7	7				0
3	72	63	57	51	61	54	49	44	37	34	31	21	20	18	7	6	6				0
4	65	56	48	43	56	48	42	37	33	29	26	19	17	16	6	6	5				0
5	60	49	42	36	51	42	36	32	29	25	22	17	15	13	5	5	4				0
6	55	44	36	31	47	38	32	27	26	22	19	15	13	11	5	4	4				0
7	50	39	32	27	43	34	28	23	23	19	17	14	11	10	4	4	3				0
8	47	35	28	23	40	30	24	20	21	17	14	12	10	9	4	3	3				0
9	43	32	25	20	37	27	22	18	19	15	13	11	9	8	4	3	3				0
10	40	29	22	18	34	25	19	16	17	14	11	10	8	7	3	3	2				0

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
95°	3890	48060	12851
100°	4179	40021	32753
105°	4388	27096	38950
110°	4659	18474	36994
115°	4816	13364	30089
120°	4859	10586	23223
125°	4868	8926	17728
130°	4811	7842	13855
135°	4752	7039	11189
140°	4737	6457	9288
145°	4757	5999	7848
150°	4810	5647	6813
155°	4848	5379	6101
160°	4894	5196	5624
165°	4924	5071	5308
170°	4942	4982	5111
175°	4949	4925	4981



TEST NUMBER: P519738

CATALOG NUMBER: SQ4-100U-0D-940-1D-UNV-STD-W-8

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	0.0	0.0
10°-20°	0.0	0.0
20°-30°	0.0	0.0
30°-40°	0.0	0.0
40°-50°	0.0	0.0
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	500.5	7.2
100°-110°	1381.7	19.9
110°-120°	1425.0	20.5
120°-130°	1145.1	16.5
130°-140°	899.9	13.0
140°-150°	690.2	9.9
150°-160°	496.0	7.1
160°-170°	303.4	4.4
170°-180°	102.3	1.5
0°-30°	0.0	0.0
0°-40°	0.0	0.0
0°-60°	0.0	0.0
0°-90°	0.0	0.0
90°-120°	3307.2	47.6
90°-150°	6042.4	87.0
90°-180°	6944.0	100.0
0°-180°	6944.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
90°	3	7	14	15	17	
95°	74	271	908	373	243	83
105°	246	380	1520	2321	2185	262
115°	441	533	1224	2424	2756	434
125°	605	689	1110	1878	2204	539
135°	728	807	1079	1521	1715	564
145°	845	903	1065	1295	1394	529
155°	952	984	1057	1162	1199	439
165°	1031	1044	1062	1103	1112	291
175°	1069	1070	1064	1079	1076	102
180°	1069	1069	1069	1069	1069	



TEST NUMBER: P519738

CATALOG NUMBER: SQ4-100U-0D-940-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
90°	3.4	6.8	13.7	15.4	17.1
92.5°	30.8	127.8	228.5	83.4	65.0
95°	73.5	270.8	908.0	373.2	242.8
97.5°	121.7	303.3	1345.1	1035.6	750.0
100°	157.3	322.8	1506.5	1517.1	1232.9
102.5°	191.5	345.0	1537.9	1874.5	1605.0
105°	246.2	380.0	1520.2	2320.8	2185.3
107.5°	304.4	423.4	1435.3	2536.0	2585.5
110°	345.4	452.4	1369.7	2582.3	2742.8
112.5°	382.3	485.3	1308.1	2545.7	2782.5
115°	441.2	533.1	1224.3	2423.8	2756.5
117.5°	492.5	584.1	1169.3	2252.1	2630.6
120°	526.7	617.0	1147.4	2135.9	2517.1
122.5°	559.5	645.8	1129.6	2027.3	2388.5
125°	605.3	688.9	1109.8	1878.1	2204.2
127.5°	644.3	727.9	1098.1	1751.9	2033.2
130°	670.3	753.9	1092.7	1674.7	1930.6
132.5°	694.9	774.5	1087.2	1609.9	1841.6
135°	728.4	807.0	1079.0	1521.2	1715.1
137.5°	766.1	837.6	1074.9	1446.6	1612.2
140°	786.6	856.8	1072.2	1396.9	1542.4
142.5°	809.8	874.7	1069.4	1352.8	1480.8
145°	844.7	903.2	1065.3	1295.0	1393.6
147.5°	878.2	929.4	1061.5	1246.3	1322.8
150°	902.9	944.7	1060.2	1217.2	1279.1
152.5°	922.0	961.1	1058.8	1192.3	1243.5
155°	952.5	984.2	1056.8	1161.9	1198.7
157.5°	980.5	1004.9	1057.1	1139.8	1164.8
160°	996.9	1018.6	1058.5	1127.3	1145.7
162.5°	1010.6	1029.7	1059.8	1116.3	1130.6
165°	1031.1	1044.5	1061.9	1103.1	1111.5
167.5°	1046.8	1054.9	1063.6	1095.1	1097.8
170°	1055.1	1061.7	1063.6	1091.0	1091.0
172.5°	1061.9	1065.9	1063.6	1085.5	1084.1
175°	1068.7	1070.4	1063.6	1078.9	1075.6
177.5°	1071.5	1070.1	1063.3	1072.8	1070.1
180°	1068.7	1068.7	1068.7	1068.7	1068.7

(END OF REPORT)