

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P936273

Luminaire Tested: SQ4-FB-025U-050D-940-1D-UNV-STD-W-12

Issue Date: 12/17/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P936273  
REPORT IS A COMBINATION OF REPORTS P933429 AND P933786  
Test Lab: INNOVATION CENTER  
Issue Date: 12/17/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ4-FB-025U-050D-940-1D-UNV-STD-W-12  
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6877.6 lumens  
Efficiency: N/A  
Efficacy: 104.2 lumens/watt  
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33  
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 12' x H: 0.1')  
CIE Type: Semi-Direct  
  
Input Watts (W): 66  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P936273  
CATALOG NUMBER: SQ4-FB-025U-050D-940-1D-UNV-STD-W-12

### Luminous Intensity Polar Plot

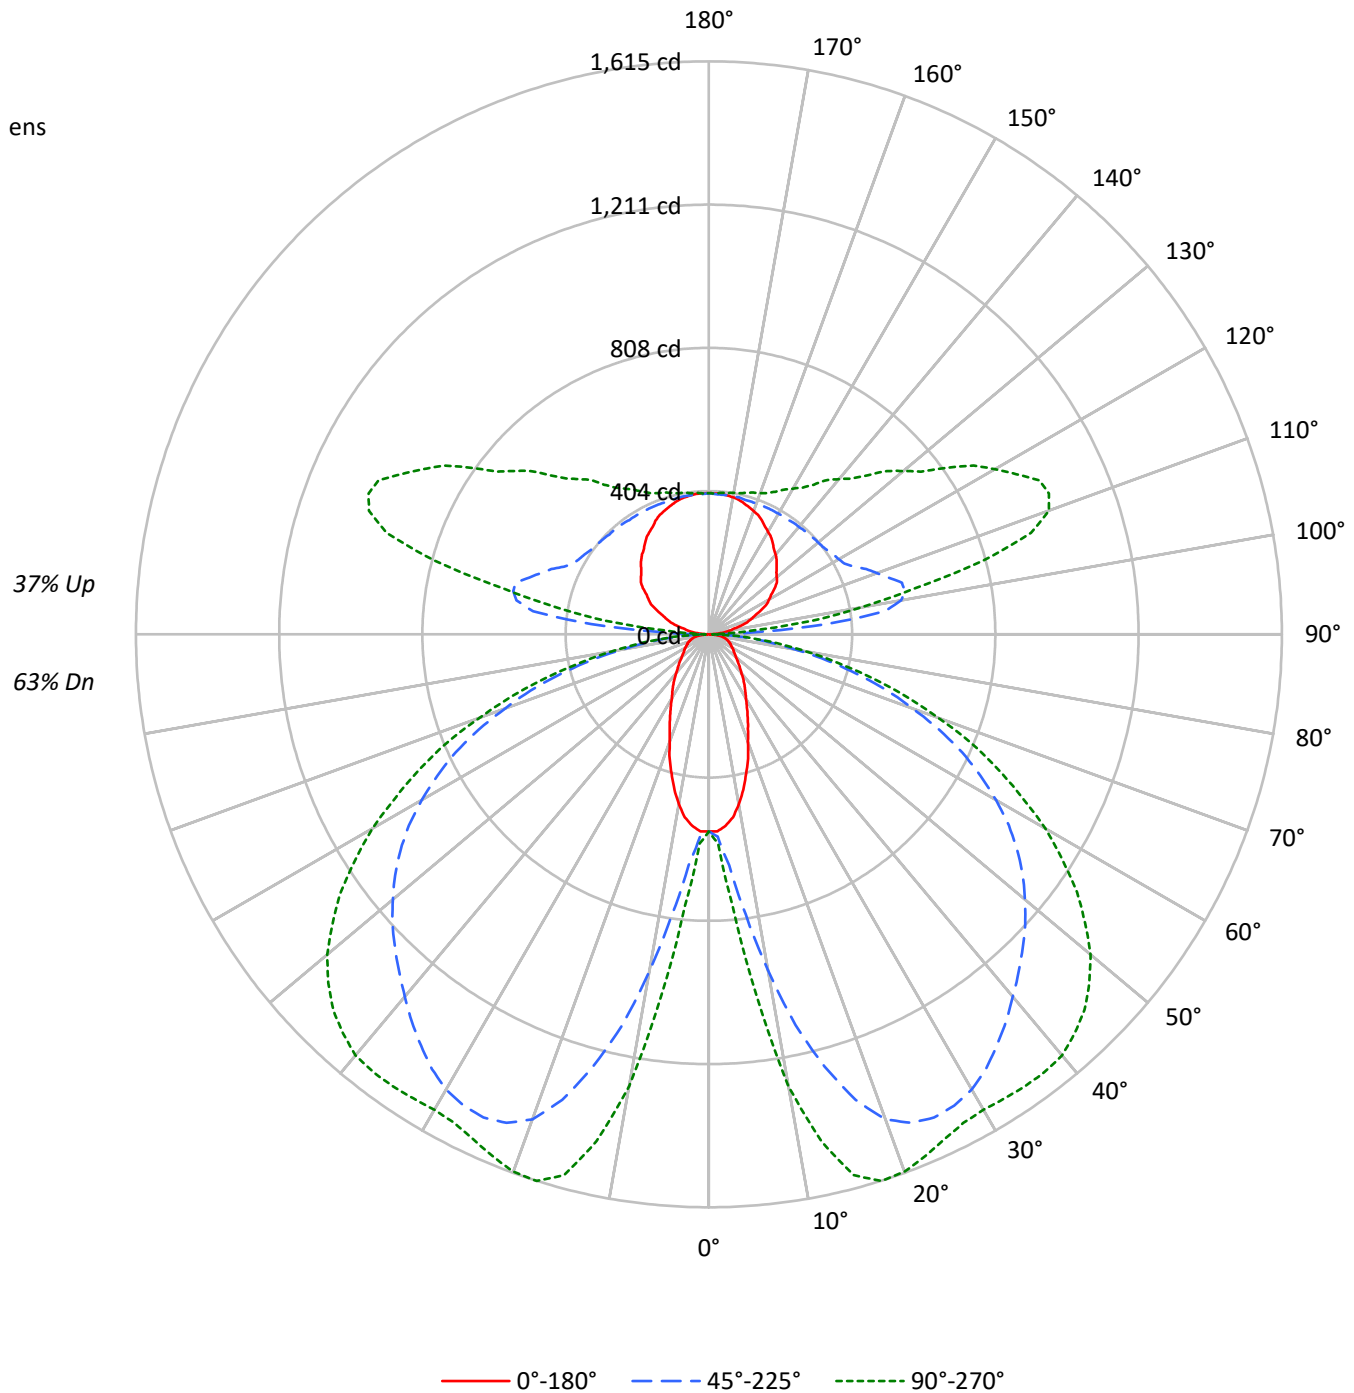



TEST NUMBER: P936273

CATALOG NUMBER: SQ4-FB-025U-050D-940-1D-UNV-STD-W-12

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	110	110	110	110	103	103	103	103	90	90	90	78	78	78	68	68	68	68	68	68	63
1	100	95	91	87	93	89	86	82	78	75	73	68	66	64	59	57	56	59	57	56	51
2	90	82	76	70	84	77	71	66	68	63	59	59	55	52	51	48	46	51	48	46	42
3	82	72	64	57	76	67	60	55	59	53	49	51	47	43	44	41	38	44	41	38	34
4	75	63	54	48	69	59	52	46	52	46	41	45	40	37	39	35	32	39	35	32	29
5	68	56	47	41	63	52	45	39	46	40	35	40	35	31	35	31	28	35	31	28	24
6	63	50	41	35	58	47	39	33	41	35	30	36	31	27	31	27	24	31	27	24	21
7	58	45	36	30	54	42	34	29	37	31	26	33	27	23	28	24	21	28	24	21	18
8	53	40	32	26	50	38	31	25	34	27	23	30	24	21	26	22	18	26	22	18	16
9	50	37	29	23	46	35	27	22	31	25	20	27	22	18	24	19	16	24	19	16	14
10	46	34	26	21	43	32	25	20	28	22	18	25	20	16	22	18	15	22	18	15	13

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1719	1719	1719
5°	1680	1987	2310
10°	1524	2897	3830
15°	1296	3786	4625
20°	1055	4389	4713
25°	881	4594	4618
30°	743	4624	4609
35°	657	4548	4728
40°	573	4450	4851
45°	519	4378	4870
50°	477	4314	4790
55°	457	4219	4577
60°	468	4035	4242
65°	488	3756	3781
70°	522	3278	3195
75°	580	2675	2493
80°	640	1857	1680
85°	577	987	860

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 45°  
 Luminance: 4870 cd/sqm



TEST NUMBER: P936273

CATALOG NUMBER: SQ4-FB-025U-050D-940-1D-UNV-STD-W-12

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	71.9	1.0
10°-20°	318.6	4.6
20°-30°	557.2	8.1
30°-40°	717.3	10.4
40°-50°	801.2	11.7
50°-60°	767.4	11.2
60°-70°	608.2	8.8
70°-80°	357.6	5.2
80°-90°	100.9	1.5
90°-100°	193.8	2.8
100°-110°	509.5	7.4
110°-120°	528.3	7.7
120°-130°	423.7	6.2
130°-140°	332.5	4.8
140°-150°	255.2	3.7
150°-160°	183.8	2.7
160°-170°	112.5	1.6
170°-180°	38.0	0.6
0°-30°	947.7	13.8
0°-40°	1665.0	24.2
0°-60°	3233.7	47.0
0°-90°	4300.3	62.5
90°-120°	1231.6	17.9
90°-150°	2243.0	32.6
90°-180°	2577.0	37.5
0°-180°	6877.6	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	556	556	556	556	556	
5°	541	581	654	740	766	50
15°	406	749	1262	1530	1578	113
25°	259	849	1503	1569	1571	119
35°	175	811	1415	1496	1554	109
45°	120	647	1251	1433	1497	93
55°	86	411	1061	1233	1267	78
65°	68	218	788	886	899	67
75°	50	134	432	475	477	52
85°	18	41	107	118	120	19
90°	3	8	20	10	10	3
95°	26	100	334	172	117	28
105°	92	139	563	855	798	97
115°	163	198	451	900	1027	161
125°	227	254	410	693	818	201
135°	270	298	398	560	635	209
145°	314	334	392	478	515	196
155°	354	364	392	431	444	163
165°	382	387	392	408	413	108
175°	398	398	395	400	400	38
180°	398	398	398	398	398	



TEST NUMBER: P936273  
 CATALOG NUMBER: SQ4-FB-025U-050D-940-1D-UNV-STD-W-12

**CANDELA DISTRIBUTION (FULL):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	555.7	555.7	555.7	555.7	555.7	555.7	555.7	555.7	555.7	555.7	555.7
2.5°	555.7	555.7	559.3	561.0	564.6	566.4	570.0	573.6	584.3	586.1	589.6
5°	541.4	548.5	571.8	580.7	605.7	639.6	653.9	677.2	725.4	739.7	748.7
7.5°	519.9	536.0	593.2	607.5	670.1	759.4	796.9	847.0	923.8	961.3	991.6
10°	486.0	519.9	621.8	655.8	757.6	893.4	963.0	1032.7	1148.9	1200.8	1220.4
12.5°	448.4	503.9	652.1	698.6	845.1	1043.5	1127.5	1204.3	1336.5	1406.2	1416.9
15°	405.6	480.7	680.7	748.7	938.1	1168.5	1261.5	1356.2	1479.5	1529.5	1542.0
17.5°	368.1	462.7	707.6	779.0	1009.6	1281.1	1375.8	1454.5	1554.5	1588.5	1597.4
20°	321.6	434.2	725.4	818.4	1084.6	1363.3	1454.5	1515.2	1583.1	1604.5	1608.1
22.5°	287.7	403.8	736.2	832.7	1134.6	1413.3	1490.2	1538.5	1584.9	1592.0	1593.8
25°	259.1	369.9	734.4	848.8	1177.5	1443.7	1502.7	1538.5	1565.2	1568.8	1568.8
27.5°	232.3	332.4	727.2	852.3	1209.6	1450.9	1497.3	1522.3	1534.8	1542.0	1542.0
30°	209.0	296.6	709.3	845.1	1223.9	1443.7	1481.3	1493.8	1506.2	1517.0	1522.3
32.5°	191.2	262.7	682.5	830.8	1225.7	1425.9	1452.7	1459.8	1477.6	1502.7	1511.6
35°	175.1	228.7	652.1	811.2	1215.1	1397.3	1415.1	1422.3	1458.0	1495.6	1508.0
37.5°	159.0	203.7	612.9	777.3	1198.9	1363.3	1375.8	1388.3	1443.7	1488.4	1502.7
40°	143.0	182.2	566.4	739.7	1173.9	1322.2	1333.0	1352.6	1425.9	1477.6	1491.9
42.5°	130.4	164.4	516.4	700.5	1141.8	1275.8	1291.9	1320.5	1404.4	1459.8	1475.9
45°	119.7	146.5	462.7	646.8	1100.7	1227.5	1250.7	1290.1	1379.4	1433.0	1447.3
47.5°	109.0	134.0	407.4	591.4	1056.0	1179.3	1209.6	1254.3	1345.4	1397.3	1409.8
50°	100.1	121.5	352.0	532.4	1007.7	1127.5	1163.2	1209.6	1302.6	1350.8	1366.9
52.5°	92.9	110.8	300.1	473.5	952.4	1073.9	1115.0	1163.2	1250.7	1297.2	1307.9
55°	85.8	101.9	255.5	411.0	895.2	1016.7	1061.3	1107.8	1193.6	1232.9	1240.0
57.5°	82.2	94.7	218.0	352.0	834.5	952.4	1002.4	1045.3	1125.6	1156.1	1163.2
60°	76.8	89.3	189.4	302.0	768.3	891.6	934.5	977.3	1045.3	1070.3	1075.6
62.5°	71.5	85.8	167.9	253.7	700.5	820.2	863.0	902.3	959.5	977.3	984.5
65°	67.9	82.2	151.8	218.0	630.7	745.1	788.0	821.9	868.4	886.2	889.8
67.5°	64.3	78.6	139.3	187.6	561.0	670.1	702.2	734.4	770.1	788.0	789.8
70°	59.0	75.0	128.7	166.1	489.6	584.3	611.1	645.0	673.6	682.5	687.9
72.5°	55.4	69.7	121.5	150.1	416.3	502.1	527.1	546.7	571.8	580.7	580.7
75°	50.0	62.5	114.4	134.0	341.3	411.0	432.4	452.1	471.7	475.3	469.9
77.5°	44.7	55.4	98.3	112.6	266.2	325.2	343.0	353.8	369.9	373.4	375.2
80°	37.6	48.2	76.8	87.6	193.0	239.4	251.9	260.9	275.2	275.2	278.7
82.5°	28.6	37.6	55.4	62.5	130.4	164.4	175.1	180.4	189.4	189.4	189.4
85°	17.8	23.3	35.7	41.1	78.6	100.1	107.2	109.0	116.2	117.9	117.9
87.5°	9.0	12.5	23.3	25.0	41.1	51.9	51.9	55.4	55.4	53.6	51.9
90°	2.7	4.8	6.9	7.5	11.7	17.4	20.2	18.0	13.5	10.1	10.1
92.5°	10.7	28.8	47.0	51.5	72.4	100.3	114.2	100.1	71.8	50.7	48.7
95°	25.6	58.8	92.0	100.3	178.1	281.9	333.8	297.8	226.0	172.1	166.0
97.5°	44.3	73.6	102.9	110.2	239.9	413.0	499.5	476.8	431.4	397.3	385.7
100°	58.7	85.2	111.8	118.5	262.5	454.5	550.5	552.2	555.4	557.9	544.1
102.5°	71.0	95.7	120.5	126.7	272.8	467.5	564.9	593.8	651.6	695.0	683.1
105°	91.8	112.8	133.7	139.0	280.4	469.0	563.3	628.1	757.8	855.1	848.8
107.5°	113.1	132.7	152.3	157.2	281.9	448.1	531.2	621.7	802.7	938.4	939.9
110°	127.5	145.2	162.9	167.3	279.7	429.6	504.6	605.7	808.0	959.8	966.4



TEST NUMBER: P936273

CATALOG NUMBER: SQ4-FB-025U-050D-940-1D-UNV-STD-W-12

**CANDELA DISTRIBUTION (continued):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	141.7	158.5	175.4	179.6	279.8	413.5	480.3	583.9	790.9	946.2	956.4
115°	163.0	178.6	194.1	198.0	282.4	394.9	451.2	550.9	750.4	900.0	914.1
117.5°	184.1	198.2	212.3	215.9	287.6	383.3	431.2	521.3	701.3	836.2	851.9
120°	196.3	209.7	223.0	226.3	291.9	379.4	423.1	505.4	669.9	793.3	808.5
122.5°	208.4	221.8	235.1	238.5	298.0	377.3	417.0	491.1	639.2	750.3	765.3
125°	226.8	239.0	251.3	254.3	306.4	375.7	410.3	473.2	599.0	693.4	707.3
127.5°	241.7	254.1	266.4	269.5	314.6	374.7	404.8	458.7	566.8	647.8	659.5
130°	249.7	263.0	276.3	279.6	320.7	375.3	402.6	450.7	546.9	619.0	629.9
132.5°	258.1	271.3	284.6	287.9	325.5	375.7	400.8	443.8	530.0	594.5	604.2
135°	270.3	282.4	294.5	297.5	330.9	375.4	397.6	433.6	505.7	559.8	568.1
137.5°	282.8	294.8	306.7	309.7	338.9	377.7	397.0	427.5	488.4	534.1	541.0
140°	293.2	304.2	315.3	318.1	343.7	378.0	395.2	421.4	474.1	513.6	520.0
142.5°	301.2	311.4	321.6	324.2	347.8	379.4	395.2	418.2	464.5	499.2	504.7
145°	313.6	322.4	331.3	333.5	353.2	379.4	392.5	411.4	449.2	477.6	481.7
147.5°	325.8	334.4	343.1	345.3	361.0	382.0	392.5	407.4	437.2	459.5	462.9
150°	333.8	341.6	349.4	351.4	365.1	383.3	392.5	405.1	430.2	449.1	451.8
152.5°	342.1	348.0	353.9	355.4	367.7	384.2	392.5	403.2	424.7	440.8	442.9
155°	354.3	358.7	363.1	364.2	373.6	386.2	392.5	401.0	418.2	430.9	432.4
157.5°	363.4	367.6	372.0	373.0	379.5	388.1	392.5	399.2	412.4	422.3	423.3
160°	369.6	372.9	376.2	377.0	382.2	389.0	392.5	398.2	409.5	418.1	418.6
162.5°	375.7	378.2	380.7	381.3	385.0	390.0	392.5	397.3	406.9	414.1	414.6
165°	382.4	384.6	386.9	387.4	389.1	391.3	392.5	396.0	402.8	407.9	408.5
167.5°	388.5	389.6	390.6	390.9	392.3	394.2	395.2	397.4	401.9	405.3	405.5
170°	392.5	393.6	394.6	394.9	395.0	395.1	395.2	397.4	401.9	405.3	405.3
172.5°	394.6	394.9	395.1	395.2	395.2	395.2	395.2	396.9	400.5	403.2	403.0
175°	397.6	397.6	397.6	397.6	396.8	395.7	395.2	396.3	398.5	400.2	400.2
177.5°	397.6	397.6	397.6	397.6	396.9	396.1	395.7	396.6	398.4	399.7	399.4
180°	397.6	397.6	397.6	397.6	397.6	397.6	397.6	397.6	397.6	397.6	397.6



TEST NUMBER: P936273

CATALOG NUMBER: SQ4-FB-025U-050D-940-1D-UNV-STD-W-12

**CANDELA DISTRIBUTION (continued):**

	80°	90°
0°	555.7	555.7
2.5°	593.2	589.6
5°	763.0	766.5
7.5°	1027.4	1025.6
10°	1277.6	1293.6
12.5°	1459.8	1463.3
15°	1570.6	1577.7
17.5°	1613.5	1615.3
20°	1615.3	1611.7
22.5°	1595.6	1592.0
25°	1572.4	1570.6
27.5°	1550.9	1552.8
30°	1542.0	1547.3
32.5°	1542.0	1550.9
35°	1545.6	1554.5
37.5°	1543.8	1554.5
40°	1536.6	1549.1
42.5°	1517.0	1525.9
45°	1486.6	1497.3
47.5°	1447.3	1454.5
50°	1397.3	1404.4
52.5°	1334.8	1336.5
55°	1259.7	1266.8
57.5°	1179.3	1181.0
60°	1089.9	1095.3
62.5°	995.3	995.3
65°	895.2	898.7
67.5°	791.6	800.4
70°	686.2	687.9
72.5°	582.5	582.5
75°	475.3	477.0
77.5°	373.4	373.4
80°	277.0	278.7
82.5°	191.2	194.7
85°	119.7	119.7
87.5°	55.4	50.0
90°	10.1	10.1
92.5°	40.7	32.6
95°	141.5	117.1
97.5°	339.2	292.7
100°	488.8	433.3
102.5°	635.7	588.3
105°	823.3	797.8
107.5°	946.2	952.3
110°	993.0	1019.5





TEST NUMBER: P936273

CATALOG NUMBER: SQ4-FB-025U-050D-940-1D-UNV-STD-W-12

**CANDELA DISTRIBUTION (continued):**

	80°	90°
112.5°	997.1	1037.9
115°	970.7	1027.2
117.5°	914.6	977.3
120°	869.4	930.4
122.5°	825.5	885.6
125°	762.6	818.0
127.5°	706.2	752.9
130°	673.0	716.2
132.5°	642.8	681.5
135°	601.4	634.7
137.5°	568.2	595.6
140°	545.5	571.0
142.5°	526.7	548.6
145°	498.3	515.0
147.5°	476.7	490.4
150°	463.0	474.1
152.5°	451.3	459.7
155°	437.9	443.5
157.5°	427.3	431.2
160°	420.9	423.1
162.5°	416.7	418.9
165°	410.8	413.0
167.5°	406.4	407.4
170°	405.3	405.3
172.5°	402.1	401.3
175°	400.2	400.2
177.5°	398.5	397.6
180°	397.6	397.6



TEST NUMBER: P936273  
 CATALOG NUMBER: SQ4-FB-025U-050D-940-1D-UNV-STD-W-12

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	3.96	5.00	4.79	5.86	6.93	17.15	18.19	17.98	19.05	20.13
	3H	4.68	5.61	5.52	6.48	7.58	19.01	19.94	19.85	20.81	21.92
	4H	4.98	5.87	5.84	6.74	7.86	19.66	20.55	20.53	21.43	22.54
	6H	5.24	6.06	6.12	6.94	8.07	20.11	20.93	20.98	21.81	22.94
	8H	5.31	6.09	6.20	7.00	8.12	20.24	21.02	21.12	21.92	23.05
	12H	5.34	6.08	6.23	6.98	8.13	20.31	21.06	21.20	21.95	23.11
4H	2H	11.20	12.09	12.07	12.96	14.08	17.44	18.33	18.31	19.21	20.32
	3H	12.78	13.53	13.66	14.44	15.57	19.51	20.25	20.39	21.16	22.29
	4H	12.89	13.56	13.78	14.47	15.63	20.29	20.97	21.18	21.87	23.03
	6H	12.91	13.50	13.81	14.43	15.58	20.84	21.43	21.75	22.36	23.52
	8H	12.89	13.44	13.80	14.36	15.54	21.01	21.56	21.92	22.49	23.66
	12H	12.86	13.35	13.78	14.29	15.47	21.12	21.61	22.05	22.56	23.73
8H	4H	14.35	14.90	15.26	15.82	17.00	20.36	20.91	21.27	21.84	23.01
	6H	14.60	15.06	15.54	16.02	17.19	21.01	21.46	21.94	22.43	23.60
	8H	14.62	15.03	15.57	15.98	17.17	21.23	21.64	22.18	22.59	23.78
	12H	14.60	14.95	15.55	15.91	17.14	21.39	21.74	22.34	22.69	23.93
12H	4H	14.50	15.00	15.43	15.94	17.12	20.33	20.82	21.26	21.77	22.94
	6H	14.86	15.27	15.81	16.23	17.41	20.99	21.40	21.94	22.35	23.54
	8H	14.94	15.30	15.89	16.25	17.49	21.23	21.59	22.18	22.54	23.78