

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P520901

Luminaire Tested: SQ4-025U-0D-92765-1D-UNV-STD-W-4_4000K

Issue Date: 5-5-2021

Test Information

Test Method: LM-79-2019
Report Number: P520901
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2101-105-51)
Test Lab: INNOVATION CENTER
Issue Date: 5-5-2021
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-025U-0D-92765-1D-UNV-STD-W-4_4000K
Description: CORELITE SQ4 SUSPENDED LED LUMINAIRE
INDIRECT ONLY
UPLIGHT 250 LUMENS PER FOOT
Light Source: 2700K-6500K CCT, 90 CRI LEDS, TUNED TO 4000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1972.1 lumens
Efficiency: N/A
Efficacy: 140.9 lumens/watt
Spacing Criteria (0/90/45): - / - / -
Luminous Opening: Rectangular (W 0.29' x L: 4' x H: 0')
CIE Type: Indirect

Input Watts (W): 14
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P520901
CATALOG NUMBER: SQ4-025U-0D-92765-1D-UNV-STD-W-4_4000K

Luminous Intensity Polar Plot

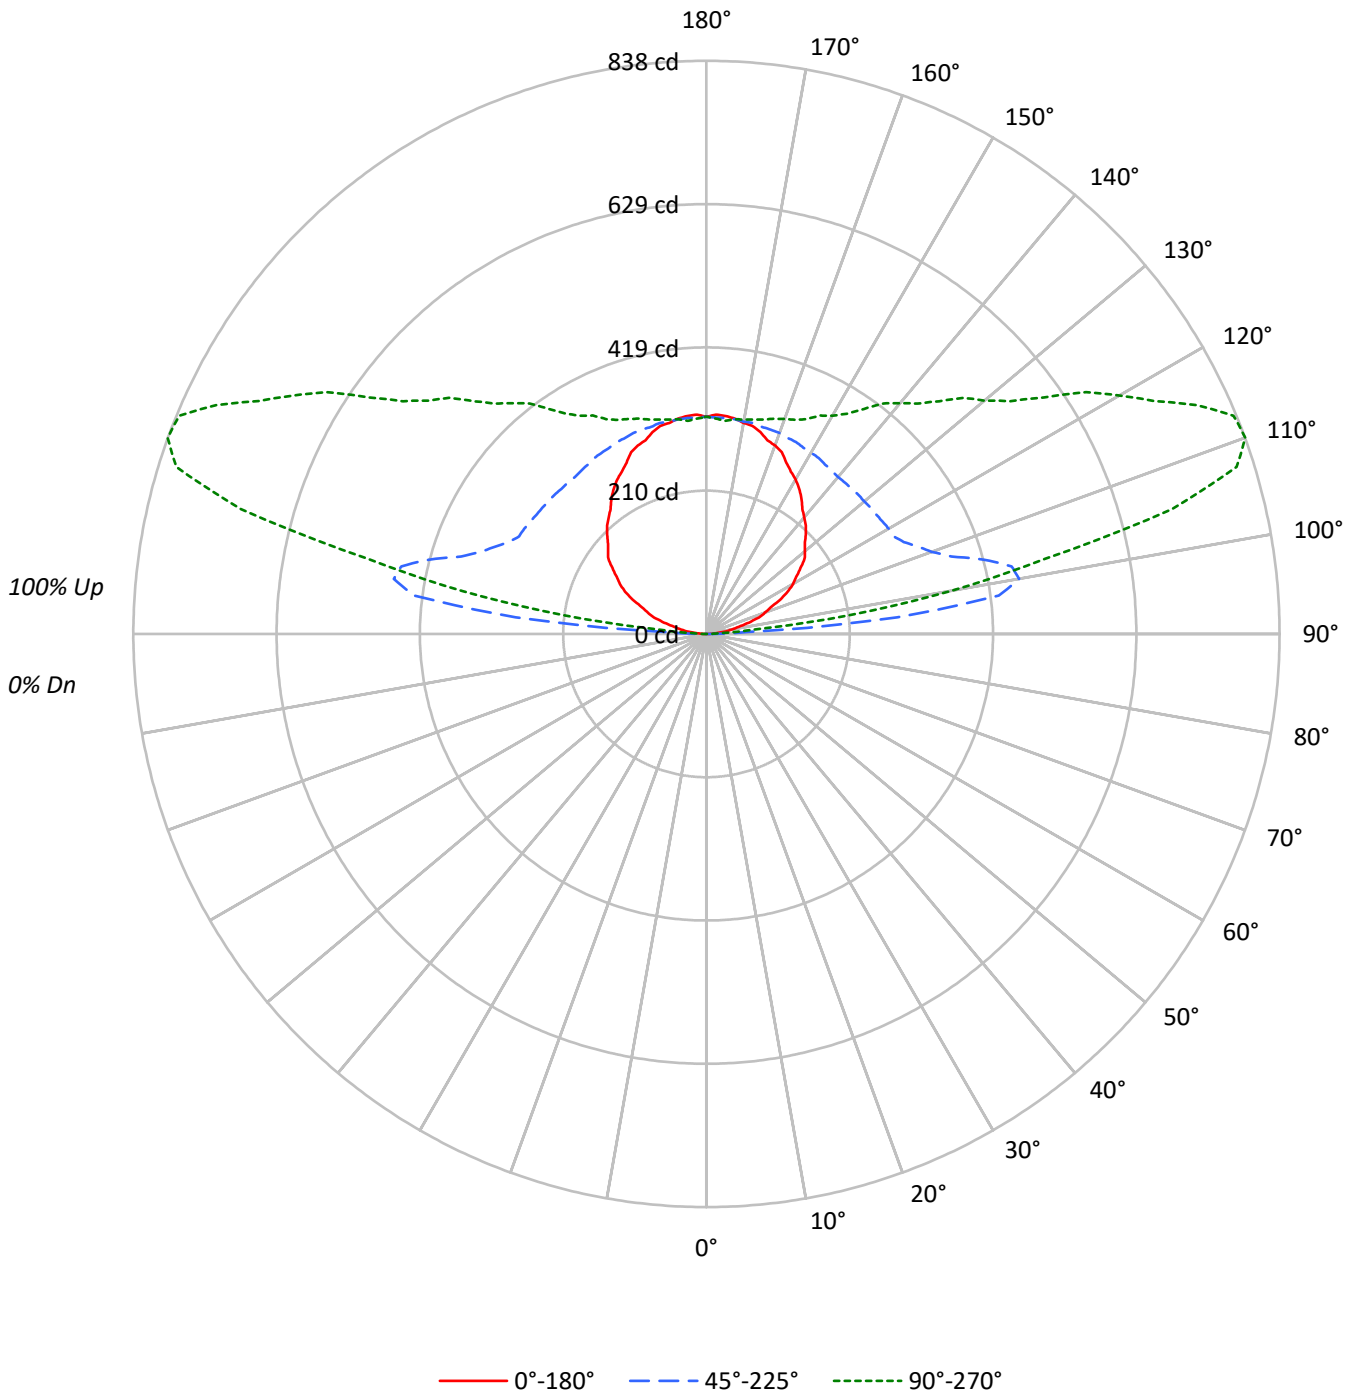

TEST NUMBER: P520901

CATALOG NUMBER: SQ4-025U-0D-92765-1D-UNV-STD-W-4_4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	95	95	95	95	81	81	81	81	56	56	56	32	32	32	10	10	10	0
1	87	83	79	76	74	71	68	65	48	47	45	28	27	26	9	9	8	0
2	79	72	66	62	67	62	57	53	42	40	37	24	23	22	8	7	7	0
3	72	63	57	51	61	54	49	44	37	34	31	21	20	18	7	6	6	0
4	65	56	48	43	56	48	42	37	33	29	26	19	17	16	6	6	5	0
5	60	49	42	36	51	42	36	32	29	25	22	17	15	13	5	5	4	0
6	55	44	36	31	47	38	32	27	26	22	19	15	13	11	5	4	4	0
7	50	39	32	27	43	34	28	23	23	19	17	14	11	10	4	4	3	0
8	47	35	28	23	40	30	24	20	21	17	14	12	10	9	4	3	3	0
9	43	32	25	20	37	27	22	18	19	15	13	11	9	8	4	3	3	0
10	40	29	22	18	34	25	19	16	17	14	11	10	8	7	3	3	2	0

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	0	0	0
5°	0	0	0
10°	0	0	0
15°	0	0	0
20°	0	0	0
25°	0	0	0
30°	0	0	0
35°	0	0	0
40°	0	0	0
45°	0	0	0
50°	0	0	0
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 0°
 Luminance: 0 cd/sqm

TEST NUMBER: P520901

CATALOG NUMBER: SQ4-025U-0D-92765-1D-UNV-STD-W-4_4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	0.0	0.0
10°-20°	0.0	0.0
20°-30°	0.0	0.0
30°-40°	0.0	0.0
40°-50°	0.0	0.0
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	144.7	7.3
100°-110°	411.6	20.9
110°-120°	394.4	20.0
120°-130°	312.1	15.8
130°-140°	250.5	12.7
140°-150°	196.1	9.9
150°-160°	143.5	7.3
160°-170°	88.9	4.5
170°-180°	30.2	1.5
0°-30°	0.0	0.0
0°-40°	0.0	0.0
0°-60°	0.0	0.0
0°-90°	0.0	0.0
90°-120°	950.7	48.2
90°-150°	1709.6	86.7
90°-180°	1972.0	100.0
0°-180°	1972.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	0	0	0	0	0	
5°	0	0	0	0	0	0
15°	0	0	0	0	0	0
25°	0	0	0	0	0	0
35°	0	0	0	0	0	0
45°	0	0	0	0	0	0
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	1
95°	16	62	280	97	60	18
105°	64	97	420	741	704	68
115°	119	144	318	674	791	117
125°	168	186	304	504	602	150
135°	205	222	300	426	481	158
145°	242	254	302	368	401	151
155°	276	283	310	333	346	128
165°	305	307	313	320	325	86
175°	320	318	317	315	313	30
180°	318	318	318	318	318	

TEST NUMBER: P520901

CATALOG NUMBER: SQ4-025U-0D-92765-1D-UNV-STD-W-4_4000K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	0.0	0.0	0.0	0.0	0.0
2.5°	0.0	0.0	0.0	0.0	0.0
5°	0.0	0.0	0.0	0.0	0.0
7.5°	0.0	0.0	0.0	0.0	0.0
10°	0.0	0.0	0.0	0.0	0.0
12.5°	0.0	0.0	0.0	0.0	0.0
15°	0.0	0.0	0.0	0.0	0.0
17.5°	0.0	0.0	0.0	0.0	0.0
20°	0.0	0.0	0.0	0.0	0.0
22.5°	0.0	0.0	0.0	0.0	0.0
25°	0.0	0.0	0.0	0.0	0.0
27.5°	0.0	0.0	0.0	0.0	0.0
30°	0.0	0.0	0.0	0.0	0.0
32.5°	0.0	0.0	0.0	0.0	0.0
35°	0.0	0.0	0.0	0.0	0.0
37.5°	0.0	0.0	0.0	0.0	0.0
40°	0.0	0.0	0.0	0.0	0.0
42.5°	0.0	0.0	0.0	0.0	0.0
45°	0.0	0.0	0.0	0.0	0.0
47.5°	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0
52.5°	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0
92.5°	4.8	25.6	59.4	17.3	13.0
95°	15.7	62.3	280.1	96.9	59.8
97.5°	28.9	73.0	431.3	308.6	211.5
100°	38.0	79.3	464.2	470.2	362.2
102.5°	48.2	86.2	456.9	601.8	507.5
105°	64.0	97.0	419.5	741.0	704.4
107.5°	80.0	109.7	375.8	780.2	812.8
110°	91.1	118.9	350.7	765.2	838.4

TEST NUMBER: P520901

CATALOG NUMBER: SQ4-025U-0D-92765-1D-UNV-STD-W-4_4000K

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	101.8	128.1	333.8	729.7	834.1
115°	118.9	143.7	318.1	673.9	791.3
117.5°	134.0	157.3	308.8	612.8	737.2
120°	146.1	165.5	307.8	577.9	697.2
122.5°	155.7	175.2	305.4	547.3	658.0
125°	167.8	186.1	303.6	503.8	602.4
127.5°	181.0	198.1	302.6	477.8	559.1
130°	187.7	204.8	301.2	459.7	530.6
132.5°	195.0	211.6	301.2	445.6	510.8
135°	205.2	222.3	300.0	425.6	481.1
137.5°	214.9	231.5	299.9	408.6	456.6
140°	222.1	239.2	299.4	394.6	440.6
142.5°	230.3	244.6	300.8	383.4	424.7
145°	242.0	254.4	302.4	368.3	401.4
147.5°	252.1	264.1	305.1	353.2	381.7
150°	260.8	269.0	306.0	348.1	368.2
152.5°	267.5	276.2	307.0	341.3	360.0
155°	276.4	282.9	309.6	332.9	346.5
157.5°	287.6	291.4	310.2	329.1	338.7
160°	293.3	296.3	312.7	326.1	334.4
162.5°	296.7	300.2	313.1	323.7	330.0
165°	305.4	306.6	313.3	320.0	324.7
167.5°	311.3	310.3	316.0	319.1	321.0
170°	313.3	312.7	315.1	315.7	318.1
172.5°	317.6	315.6	316.5	314.8	316.6
175°	319.9	318.1	316.9	315.0	312.7
177.5°	320.9	318.0	316.5	314.6	315.1
180°	317.5	317.5	317.5	317.5	317.5

(END OF REPORT)