

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P520903

Luminaire Tested: SQ4-025U-0D-92765-1D-UNV-STD-W-4_5000K

Issue Date: 5-5-2021

Test Information

Test Method: LM-79-2019
Report Number: P520903
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2101-105-51)
Test Lab: INNOVATION CENTER
Issue Date: 5-5-2021
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-025U-0D-92765-1D-UNV-STD-W-4_5000K
Description: CORELITE SQ4 SUSPENDED LED LUMINAIRE
INDIRECT ONLY
UPLIGHT 250 LUMENS PER FOOT
Light Source: 2700K-6500K CCT, 90 CRI LEDS, TUNED TO 5000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2026.2 lumens
Efficiency: N/A
Efficacy: 144.7 lumens/watt
Spacing Criteria (0/90/45): - / - / -
Luminous Opening: Rectangular (W 0.29' x L: 4' x H: 0')
CIE Type: Indirect


Input Watts (W): 14
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P520903

CATALOG NUMBER: SQ4-025U-0D-92765-1D-UNV-STD-W-4_5000K

Luminous Intensity Polar Plot

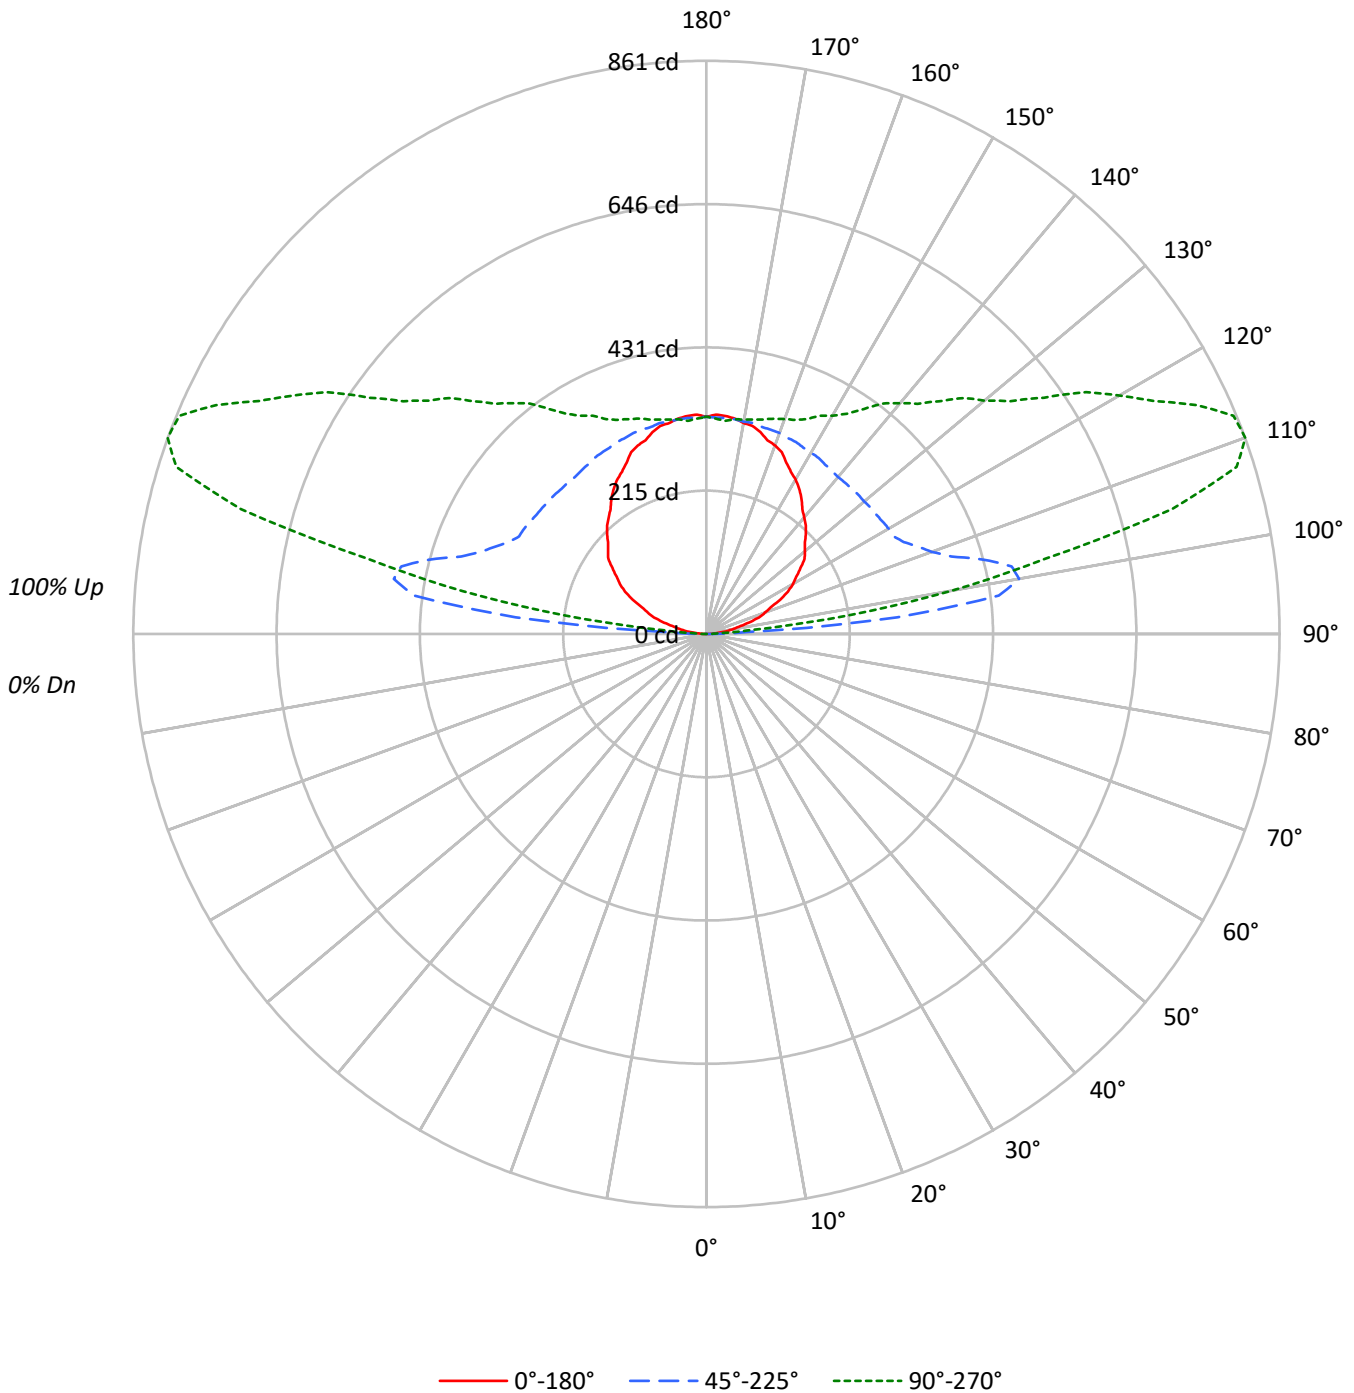

TEST NUMBER: P520903

CATALOG NUMBER: SQ4-025U-0D-92765-1D-UNV-STD-W-4_5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	95	95	95	95	81	81	81	81	56	56	56	32	32	32	10	10	10	0
1	87	83	79	76	74	71	68	65	48	47	45	28	27	26	9	9	8	0
2	79	72	66	62	67	62	57	53	42	40	37	24	23	22	8	7	7	0
3	72	63	57	51	61	54	49	44	37	34	31	21	20	18	7	6	6	0
4	65	56	48	43	56	48	42	37	33	29	26	19	17	16	6	6	5	0
5	60	49	42	36	51	42	36	32	29	25	22	17	15	13	5	5	4	0
6	55	44	36	31	47	38	32	27	26	22	19	15	13	11	5	4	4	0
7	50	39	32	27	43	34	28	23	23	19	17	14	11	10	4	4	3	0
8	47	35	28	23	40	30	24	20	21	17	14	12	10	9	4	3	3	0
9	43	32	25	20	37	27	22	18	19	15	13	11	9	8	4	3	3	0
10	40	29	22	18	34	25	19	16	17	14	11	10	8	7	3	3	2	0

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	0	0	0
5°	0	0	0
10°	0	0	0
15°	0	0	0
20°	0	0	0
25°	0	0	0
30°	0	0	0
35°	0	0	0
40°	0	0	0
45°	0	0	0
50°	0	0	0
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 0°
 Luminance: 0 cd/sqm

TEST NUMBER: P520903

CATALOG NUMBER: SQ4-025U-0D-92765-1D-UNV-STD-W-4_5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	0.0	0.0
10°-20°	0.0	0.0
20°-30°	0.0	0.0
30°-40°	0.0	0.0
40°-50°	0.0	0.0
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	148.6	7.3
100°-110°	422.9	20.9
110°-120°	405.2	20.0
120°-130°	320.7	15.8
130°-140°	257.4	12.7
140°-150°	201.5	9.9
150°-160°	147.4	7.3
160°-170°	91.3	4.5
170°-180°	31.0	1.5
0°-30°	0.0	0.0
0°-40°	0.0	0.0
0°-60°	0.0	0.0
0°-90°	0.0	0.0
90°-120°	976.8	48.2
90°-150°	1756.4	86.7
90°-180°	2026.0	100.0
0°-180°	2026.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	0	0	0	0	0	
5°	0	0	0	0	0	0
15°	0	0	0	0	0	0
25°	0	0	0	0	0	0
35°	0	0	0	0	0	0
45°	0	0	0	0	0	0
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	1
95°	16	64	288	100	61	18
105°	66	100	431	761	724	70
115°	122	148	327	692	813	120
125°	172	191	312	518	619	154
135°	211	228	308	437	494	163
145°	249	261	311	378	412	155
155°	284	291	318	342	356	131
165°	314	315	322	329	334	88
175°	329	327	326	324	321	31
180°	326	326	326	326	326	

TEST NUMBER: P520903

CATALOG NUMBER: SQ4-025U-0D-92765-1D-UNV-STD-W-4_5000K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	0.0	0.0	0.0	0.0	0.0
2.5°	0.0	0.0	0.0	0.0	0.0
5°	0.0	0.0	0.0	0.0	0.0
7.5°	0.0	0.0	0.0	0.0	0.0
10°	0.0	0.0	0.0	0.0	0.0
12.5°	0.0	0.0	0.0	0.0	0.0
15°	0.0	0.0	0.0	0.0	0.0
17.5°	0.0	0.0	0.0	0.0	0.0
20°	0.0	0.0	0.0	0.0	0.0
22.5°	0.0	0.0	0.0	0.0	0.0
25°	0.0	0.0	0.0	0.0	0.0
27.5°	0.0	0.0	0.0	0.0	0.0
30°	0.0	0.0	0.0	0.0	0.0
32.5°	0.0	0.0	0.0	0.0	0.0
35°	0.0	0.0	0.0	0.0	0.0
37.5°	0.0	0.0	0.0	0.0	0.0
40°	0.0	0.0	0.0	0.0	0.0
42.5°	0.0	0.0	0.0	0.0	0.0
45°	0.0	0.0	0.0	0.0	0.0
47.5°	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0
52.5°	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0
92.5°	5.0	26.3	61.0	17.8	13.4
95°	16.1	64.0	287.7	99.6	61.4
97.5°	29.6	75.0	443.1	317.1	217.3
100°	39.1	81.5	476.9	483.0	372.1
102.5°	49.5	88.5	469.4	618.3	521.4
105°	65.7	99.7	431.0	761.3	723.7
107.5°	82.2	112.7	386.1	801.6	835.1
110°	93.6	122.1	360.3	786.2	861.3

TEST NUMBER: P520903

CATALOG NUMBER: SQ4-025U-0D-92765-1D-UNV-STD-W-4_5000K

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	104.6	131.6	342.9	749.7	856.9
115°	122.2	147.6	326.8	692.3	813.0
117.5°	137.7	161.6	317.3	629.6	757.4
120°	150.1	170.1	316.3	593.8	716.2
122.5°	160.0	180.0	313.8	562.3	676.1
125°	172.4	191.2	311.9	517.6	618.9
127.5°	185.9	203.5	310.9	490.9	574.4
130°	192.9	210.4	309.4	472.3	545.1
132.5°	200.3	217.4	309.4	457.8	524.7
135°	210.8	228.4	308.2	437.2	494.2
137.5°	220.8	237.9	308.1	419.8	469.1
140°	228.2	245.8	307.6	405.4	452.7
142.5°	236.6	251.3	309.1	393.9	436.3
145°	248.7	261.4	310.7	378.4	412.4
147.5°	259.0	271.3	313.4	362.8	392.2
150°	267.9	276.4	314.4	357.7	378.3
152.5°	274.8	283.8	315.4	350.7	369.8
155°	284.0	290.7	318.1	342.0	355.9
157.5°	295.4	299.4	318.7	338.1	348.0
160°	301.4	304.4	321.2	335.1	343.5
162.5°	304.9	308.4	321.7	332.5	339.1
165°	313.8	315.0	321.8	328.8	333.6
167.5°	319.9	318.8	324.7	327.8	329.8
170°	321.8	321.2	323.7	324.4	326.8
172.5°	326.3	324.2	325.2	323.4	325.3
175°	328.7	326.8	325.6	323.6	321.2
177.5°	329.7	326.7	325.2	323.2	323.7
180°	326.2	326.2	326.2	326.2	326.2

(END OF REPORT)