

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P520941

Luminaire Tested: SQ4-100U-0D-92765-1D-UNV-STD-W-4_4500K

Issue Date: 5-5-2021

Test Information

Test Method: LM-79-2019
Report Number: P520941
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2101-105-51)
Test Lab: INNOVATION CENTER
Issue Date: 5-5-2021
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-100U-0D-92765-1D-UNV-STD-W-4_4500K
Description: CORELITE SQ4 SUSPENDED LED LUMINAIRE
INDIRECT ONLY
UPLIGHT 1000 LUMENS PER FOOT
Light Source: 2700K-6500K CCT, 90 CRI LEDS, TUNED TO 4500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4524.3 lumens
Efficiency: N/A
Efficacy: 139.6 lumens/watt
Spacing Criteria (0/90/45): - / - / -
Luminous Opening: Rectangular (W 0.29' x L: 4' x H: 0')
CIE Type: Indirect


Input Watts (W): 32.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P520941

CATALOG NUMBER: SQ4-100U-0D-92765-1D-UNV-STD-W-4_4500K

Luminous Intensity Polar Plot

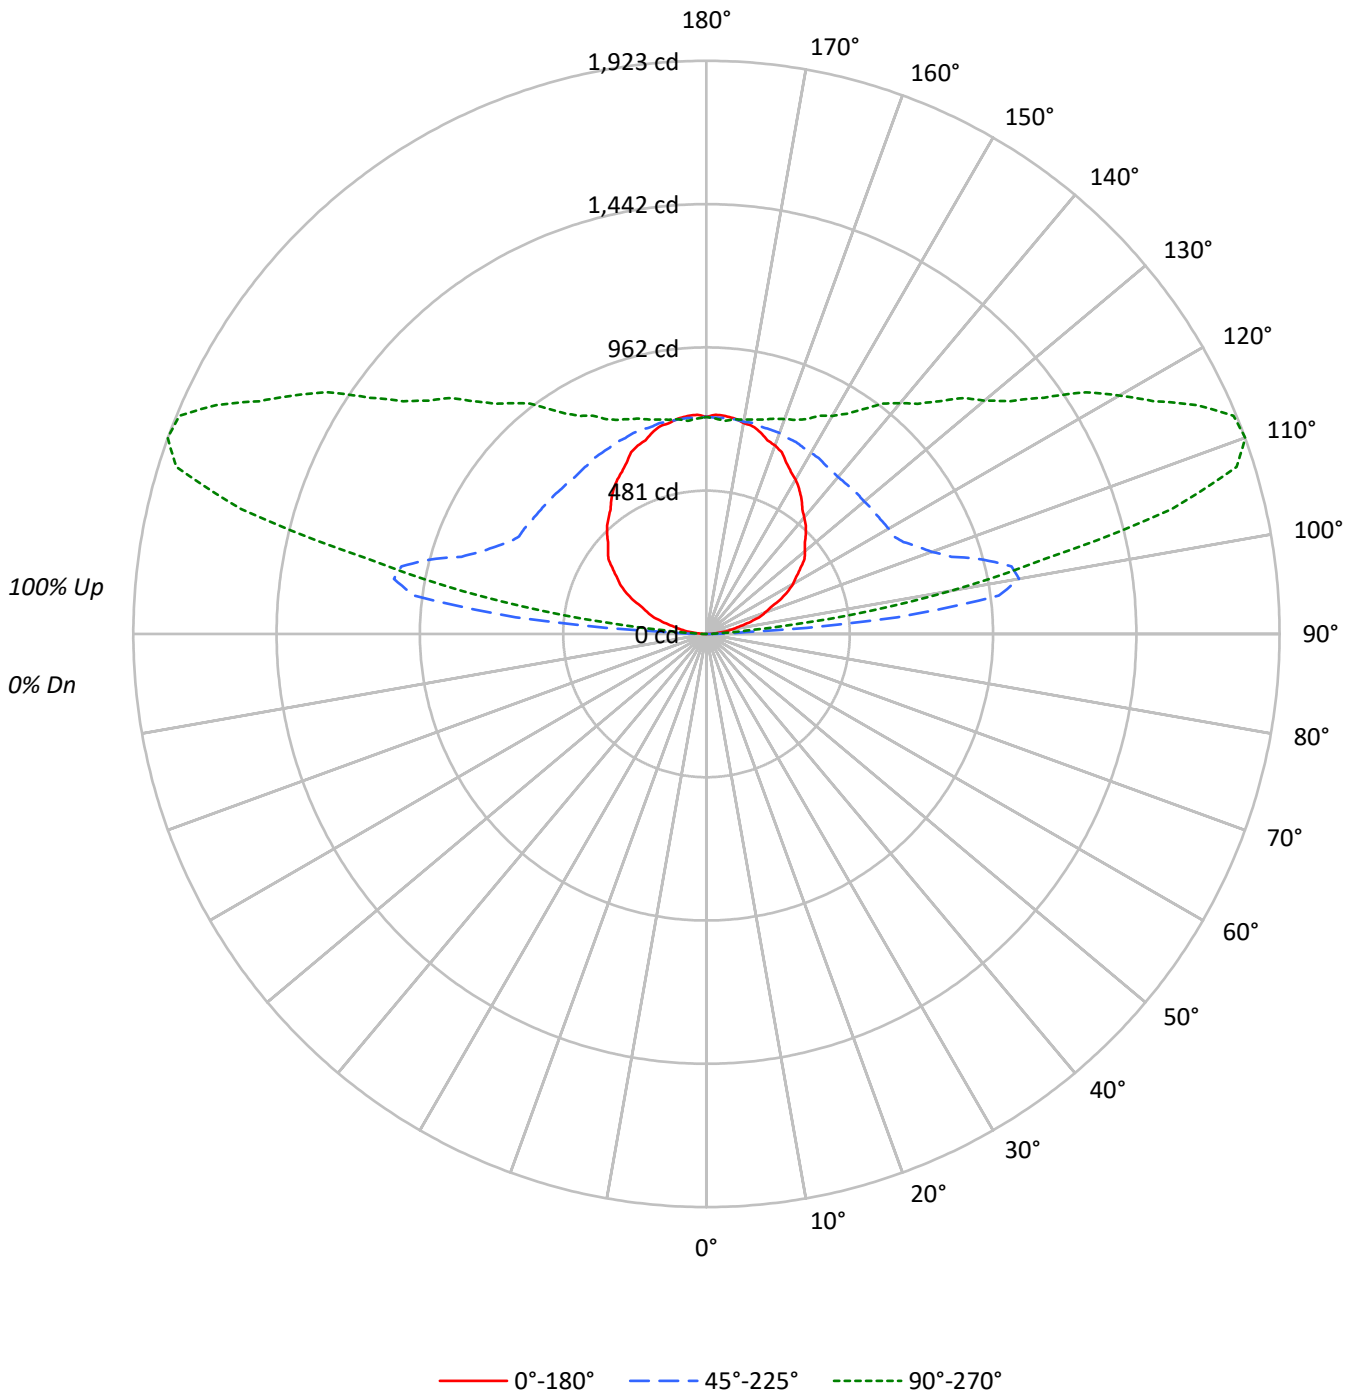

TEST NUMBER: P520941

CATALOG NUMBER: SQ4-100U-0D-92765-1D-UNV-STD-W-4_4500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	95	95	95	95	81	81	81	81	56	56	56	32	32	32	10	10	10	0
1	87	83	79	76	74	71	68	65	48	47	45	28	27	26	9	9	8	0
2	79	72	66	62	67	62	57	53	42	40	37	24	23	22	8	7	7	0
3	72	63	57	51	61	54	49	44	37	34	31	21	20	18	7	6	6	0
4	65	56	48	43	56	48	42	37	33	29	26	19	17	16	6	6	5	0
5	60	49	42	36	51	42	36	32	29	25	22	17	15	13	5	5	4	0
6	55	44	36	31	47	38	32	27	26	22	19	15	13	11	5	4	4	0
7	50	39	32	27	43	34	28	23	23	19	17	14	11	10	4	4	3	0
8	47	35	28	23	40	30	24	20	21	17	14	12	10	9	4	3	3	0
9	43	32	25	20	37	27	22	18	19	15	13	11	9	8	4	3	3	0
10	40	29	22	18	34	25	19	16	17	14	11	10	8	7	3	3	2	0

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	0	0	0
5°	0	0	0
10°	0	0	0
15°	0	0	0
20°	0	0	0
25°	0	0	0
30°	0	0	0
35°	0	0	0
40°	0	0	0
45°	0	0	0
50°	0	0	0
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 0°
 Luminance: 0 cd/sqm

TEST NUMBER: P520941

CATALOG NUMBER: SQ4-100U-0D-92765-1D-UNV-STD-W-4_4500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	0.0	0.0
10°-20°	0.0	0.0
20°-30°	0.0	0.0
30°-40°	0.0	0.0
40°-50°	0.0	0.0
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	331.9	7.3
100°-110°	944.4	20.9
110°-120°	904.8	20.0
120°-130°	716.1	15.8
130°-140°	574.8	12.7
140°-150°	450.0	9.9
150°-160°	329.3	7.3
160°-170°	203.9	4.5
170°-180°	69.2	1.5
0°-30°	0.0	0.0
0°-40°	0.0	0.0
0°-60°	0.0	0.0
0°-90°	0.0	0.0
90°-120°	2181.1	48.2
90°-150°	3921.9	86.7
90°-180°	4524.0	100.0
0°-180°	4524.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	0	0	0	0	0	
5°	0	0	0	0	0	0
15°	0	0	0	0	0	0
25°	0	0	0	0	0	0
35°	0	0	0	0	0	0
45°	0	0	0	0	0	0
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	2
95°	36	143	642	222	137	41
105°	147	223	962	1700	1616	155
115°	273	330	730	1546	1815	269
125°	385	427	696	1156	1382	345
135°	471	510	688	976	1104	363
145°	555	584	694	845	921	347
155°	634	649	710	764	795	293
165°	701	703	719	734	745	197
175°	734	730	727	723	717	70
180°	728	728	728	728	728	

TEST NUMBER: P520941

CATALOG NUMBER: SQ4-100U-0D-92765-1D-UNV-STD-W-4_4500K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	0.0	0.0	0.0	0.0	0.0
2.5°	0.0	0.0	0.0	0.0	0.0
5°	0.0	0.0	0.0	0.0	0.0
7.5°	0.0	0.0	0.0	0.0	0.0
10°	0.0	0.0	0.0	0.0	0.0
12.5°	0.0	0.0	0.0	0.0	0.0
15°	0.0	0.0	0.0	0.0	0.0
17.5°	0.0	0.0	0.0	0.0	0.0
20°	0.0	0.0	0.0	0.0	0.0
22.5°	0.0	0.0	0.0	0.0	0.0
25°	0.0	0.0	0.0	0.0	0.0
27.5°	0.0	0.0	0.0	0.0	0.0
30°	0.0	0.0	0.0	0.0	0.0
32.5°	0.0	0.0	0.0	0.0	0.0
35°	0.0	0.0	0.0	0.0	0.0
37.5°	0.0	0.0	0.0	0.0	0.0
40°	0.0	0.0	0.0	0.0	0.0
42.5°	0.0	0.0	0.0	0.0	0.0
45°	0.0	0.0	0.0	0.0	0.0
47.5°	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0
52.5°	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0
92.5°	11.1	58.7	136.3	39.7	29.9
95°	36.0	143.0	642.5	222.4	137.1
97.5°	66.2	167.5	989.5	708.1	485.2
100°	87.2	182.0	1064.8	1078.6	830.8
102.5°	110.5	197.7	1048.2	1380.6	1164.3
105°	146.8	222.6	962.4	1699.9	1616.0
107.5°	183.6	251.6	862.1	1789.9	1864.7
110°	209.1	272.7	804.5	1755.5	1923.4

TEST NUMBER: P520941

CATALOG NUMBER: SQ4-100U-0D-92765-1D-UNV-STD-W-4_4500K

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	233.5	293.8	765.7	1674.0	1913.4
115°	272.8	329.7	729.7	1545.9	1815.4
117.5°	307.4	360.8	708.4	1405.9	1691.3
120°	335.1	379.8	706.2	1325.8	1599.3
122.5°	357.3	401.9	700.7	1255.6	1509.6
125°	385.0	426.9	696.5	1155.8	1381.9
127.5°	415.1	454.4	694.3	1096.2	1282.5
130°	430.6	469.9	691.0	1054.7	1217.2
132.5°	447.3	485.4	691.0	1022.3	1171.7
135°	470.8	510.1	688.2	976.3	1103.6
137.5°	493.0	531.1	687.9	937.5	1047.4
140°	509.6	548.8	686.8	905.2	1010.8
142.5°	528.4	561.2	690.1	879.5	974.3
145°	555.3	583.7	693.7	845.0	920.8
147.5°	578.3	605.9	699.8	810.2	875.7
150°	598.2	617.2	702.0	798.6	844.7
152.5°	613.7	633.7	704.3	783.1	825.8
155°	634.2	649.1	710.4	763.7	794.8
157.5°	659.7	668.6	711.7	754.9	777.1
160°	673.0	679.7	717.3	748.2	767.1
162.5°	680.7	688.6	718.4	742.5	757.2
165°	700.7	703.4	718.7	734.1	745.0
167.5°	714.2	711.8	725.0	732.1	736.4
170°	718.7	717.3	722.8	724.3	729.7
172.5°	728.6	724.0	726.1	722.1	726.4
175°	733.9	729.8	727.0	722.7	717.3
177.5°	736.1	729.6	726.1	721.7	722.8
180°	728.4	728.4	728.4	728.4	728.4

(END OF REPORT)