

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P936227

Luminaire Tested: SQ4-FB-025U-050D-92765-1D-UNV-STD-W-12-3500K

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P936227
REPORT IS A COMBINATION OF REPORTS P933429 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-025U-050D-92765-1D-UNV-STD-W-12-3500K
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6913.3 lumens
Efficiency: N/A
Efficacy: 104.7 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 12' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 66
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P936227
CATALOG NUMBER: SQ4-FB-025U-050D-92765-1D-UNV-STD-W-12-3500K

Luminous Intensity Polar Plot

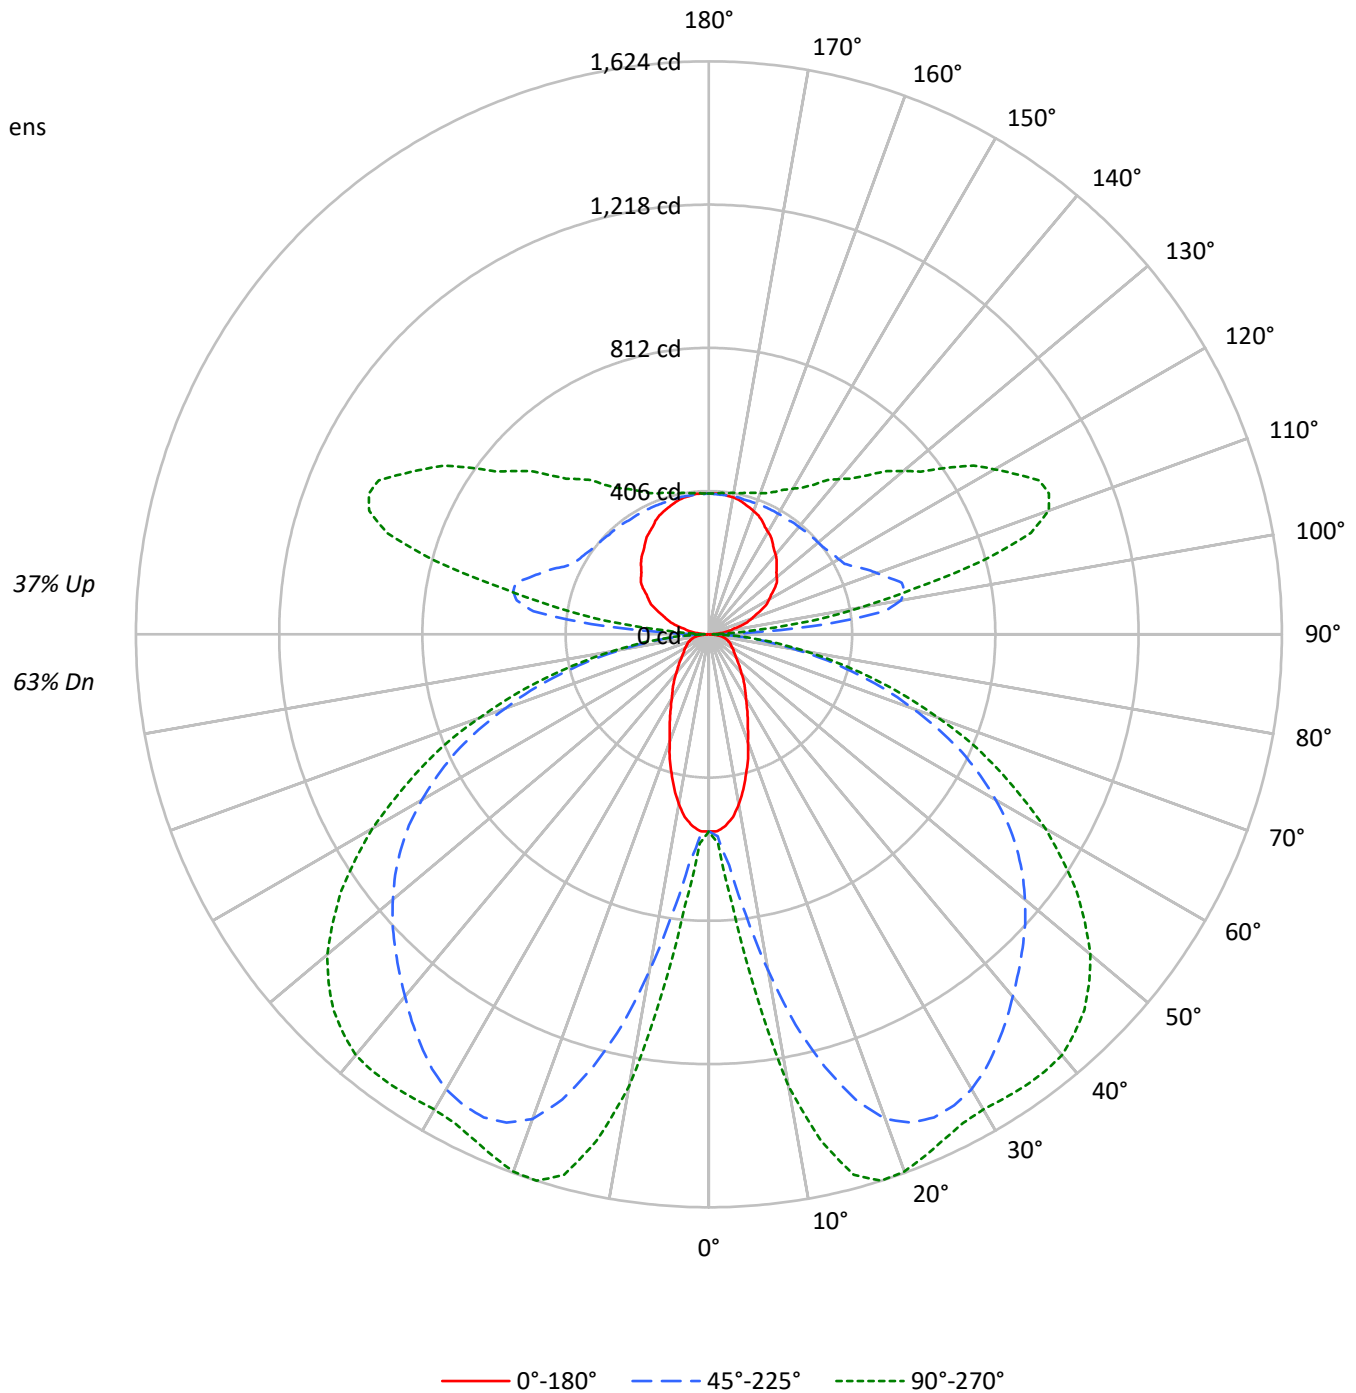



TEST NUMBER: P936227

CATALOG NUMBER: SQ4-FB-025U-050D-92765-1D-UNV-STD-W-12-3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	103	103	103	103	90	90	90	78	78	78	68	68	68	63
1	100	95	91	87	93	89	86	82	78	75	73	68	66	64	59	57	56	51
2	90	82	76	70	84	77	71	66	68	63	59	59	55	52	51	48	46	42
3	82	72	64	57	76	67	60	55	59	53	49	51	47	43	44	41	38	34
4	75	63	54	48	69	59	52	46	52	46	41	45	40	37	39	35	32	29
5	68	56	47	41	63	52	45	39	46	40	35	40	35	31	35	31	28	24
6	63	50	41	35	58	47	39	33	41	35	30	36	31	27	31	27	24	21
7	58	45	36	30	54	42	34	29	37	31	26	33	27	23	28	24	21	18
8	53	40	32	26	50	38	31	25	34	27	23	30	24	21	26	22	18	16
9	50	37	29	23	46	35	27	22	31	25	20	27	22	18	24	19	16	14
10	46	34	26	21	43	32	25	20	28	22	18	25	20	16	22	18	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1728	1728	1728
5°	1688	1997	2322
10°	1532	2912	3850
15°	1303	3806	4649
20°	1061	4411	4738
25°	886	4617	4642
30°	747	4648	4633
35°	661	4572	4753
40°	576	4473	4877
45°	522	4401	4896
50°	479	4336	4815
55°	459	4241	4601
60°	471	4057	4264
65°	491	3775	3801
70°	524	3295	3211
75°	583	2688	2506
80°	643	1867	1689
85°	580	992	864

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 4896 cd/sqm



TEST NUMBER: P936227

CATALOG NUMBER: SQ4-FB-025U-050D-92765-1D-UNV-STD-W-12-3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	72.3	1.0
10°-20°	320.2	4.6
20°-30°	560.1	8.1
30°-40°	721.1	10.4
40°-50°	805.4	11.6
50°-60°	771.4	11.2
60°-70°	611.3	8.8
70°-80°	359.5	5.2
80°-90°	101.4	1.5
90°-100°	194.8	2.8
100°-110°	512.1	7.4
110°-120°	531.0	7.7
120°-130°	426.0	6.2
130°-140°	334.2	4.8
140°-150°	256.5	3.7
150°-160°	184.7	2.7
160°-170°	113.0	1.6
170°-180°	38.2	0.6
0°-30°	952.6	13.8
0°-40°	1673.7	24.2
0°-60°	3250.5	47.0
0°-90°	4322.7	62.5
90°-120°	1238.0	17.9
90°-150°	2254.7	32.6
90°-180°	2591.0	37.5
0°-180°	6913.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	559	559	559	559	559	
5°	544	584	657	744	770	50
15°	408	753	1268	1537	1586	113
25°	260	853	1510	1577	1579	120
35°	176	815	1422	1503	1563	110
45°	120	650	1257	1440	1505	93
55°	86	413	1067	1239	1273	79
65°	68	219	792	891	903	68
75°	50	135	435	478	480	53
85°	18	41	108	118	120	19
90°	3	8	20	10	10	3
95°	26	101	336	173	118	29
105°	92	140	566	860	802	98
115°	164	199	454	905	1033	162
125°	228	256	412	697	822	202
135°	272	299	400	563	638	210
145°	315	335	394	480	518	197
155°	356	366	394	433	446	164
165°	384	390	394	410	415	108
175°	400	400	397	402	402	38
180°	400	400	400	400	400	



TEST NUMBER: P936227

CATALOG NUMBER: SQ4-FB-025U-050D-92765-1D-UNV-STD-W-12-3500K

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	558.6	558.6	558.6	558.6	558.6	558.6	558.6	558.6	558.6	558.6	558.6
2.5°	558.6	558.6	562.2	564.0	567.5	569.3	573.0	576.5	587.3	589.1	592.7
5°	544.2	551.4	574.8	583.7	608.9	643.0	657.3	680.7	729.2	743.6	752.6
7.5°	522.6	538.8	596.3	610.6	673.6	763.4	801.0	851.4	928.6	966.3	996.8
10°	488.5	522.6	625.0	659.2	761.5	898.1	968.0	1038.1	1154.9	1207.0	1226.7
12.5°	450.8	506.5	655.5	702.2	849.5	1048.9	1133.4	1210.6	1343.5	1413.6	1424.3
15°	407.7	483.2	684.3	752.6	943.0	1174.6	1268.1	1363.2	1487.2	1537.4	1550.0
17.5°	370.0	465.1	711.2	783.1	1014.8	1287.8	1382.9	1462.0	1562.6	1596.7	1605.7
20°	323.3	436.5	729.2	822.6	1090.2	1370.4	1462.0	1523.1	1591.4	1612.9	1616.4
22.5°	289.2	405.9	740.0	837.0	1140.5	1420.7	1497.9	1546.5	1593.1	1600.3	1602.1
25°	260.5	371.8	738.2	853.2	1183.6	1451.2	1510.5	1546.5	1573.3	1577.0	1577.0
27.5°	233.5	334.1	731.0	856.7	1215.9	1458.5	1505.1	1530.2	1542.8	1550.0	1550.0
30°	210.1	298.1	713.0	849.5	1230.3	1451.2	1489.0	1501.6	1514.1	1524.9	1530.2
32.5°	192.2	264.0	686.1	835.1	1232.1	1433.3	1460.2	1467.4	1485.3	1510.5	1519.5
35°	176.0	229.9	655.5	815.4	1221.4	1404.5	1422.5	1429.7	1465.6	1503.4	1515.8
37.5°	159.9	204.8	616.1	781.3	1205.1	1370.4	1382.9	1395.5	1451.2	1496.1	1510.5
40°	143.7	183.2	569.3	743.6	1180.0	1329.1	1339.9	1359.6	1433.3	1485.3	1499.7
42.5°	131.1	165.2	519.1	704.1	1147.7	1282.4	1298.6	1327.3	1411.7	1467.4	1483.5
45°	120.3	147.3	465.1	650.2	1106.4	1233.9	1257.3	1296.8	1386.6	1440.4	1454.8
47.5°	109.5	134.7	409.5	594.5	1061.5	1185.4	1215.9	1260.8	1352.4	1404.5	1417.1
50°	100.6	122.1	353.8	535.2	1012.9	1133.4	1169.2	1215.9	1309.4	1357.9	1374.0
52.5°	93.4	111.4	301.7	475.9	957.3	1079.4	1120.8	1169.2	1257.3	1303.9	1314.7
55°	86.2	102.4	256.8	413.1	899.9	1022.0	1066.9	1113.5	1199.8	1239.3	1246.5
57.5°	82.7	95.2	219.1	353.8	838.8	957.3	1007.6	1050.7	1131.5	1162.1	1169.2
60°	77.2	89.8	190.4	303.6	772.3	896.3	939.4	982.4	1050.7	1075.9	1081.2
62.5°	71.9	86.2	168.8	255.0	704.1	824.4	867.5	907.0	964.5	982.4	989.6
65°	68.3	82.7	152.6	219.1	634.0	749.0	792.1	826.2	872.9	890.8	894.4
67.5°	64.6	79.0	140.1	188.6	564.0	673.6	705.9	738.2	774.1	792.1	793.9
70°	59.3	75.4	129.3	167.0	492.1	587.3	614.3	648.4	677.1	686.1	691.5
72.5°	55.7	70.1	122.1	150.9	418.5	504.7	529.9	549.6	574.8	583.7	583.7
75°	50.3	62.8	115.0	134.7	343.0	413.1	434.6	454.4	474.2	477.7	472.4
77.5°	44.9	55.7	98.8	113.2	267.6	326.9	344.8	355.6	371.8	375.3	377.1
80°	37.8	48.5	77.2	88.0	194.0	240.7	253.2	262.3	276.6	276.6	280.2
82.5°	28.7	37.8	55.7	62.8	131.1	165.2	176.0	181.4	190.4	190.4	190.4
85°	17.9	23.4	35.9	41.3	79.0	100.6	107.7	109.5	116.8	118.5	118.5
87.5°	9.0	12.6	23.4	25.2	41.3	52.1	52.1	55.7	55.7	53.9	52.1
90°	2.7	4.8	7.0	7.5	11.8	17.5	20.4	18.1	13.6	10.2	10.2
92.5°	10.7	28.9	47.2	51.8	72.7	100.8	114.8	100.6	72.2	51.0	48.9
95°	25.7	59.1	92.5	100.9	179.1	283.4	335.5	299.4	227.2	173.0	166.8
97.5°	44.5	74.0	103.5	110.8	241.2	415.2	502.1	479.2	433.6	399.4	387.7
100°	59.0	85.7	112.4	119.1	263.9	456.8	553.3	555.0	558.3	560.8	546.9
102.5°	71.3	96.2	121.1	127.4	274.2	470.0	567.8	596.9	655.0	698.7	686.7
105°	92.3	113.4	134.4	139.7	281.9	471.4	566.2	631.4	761.8	859.6	853.2
107.5°	113.7	133.4	153.1	158.0	283.3	450.4	534.0	624.9	806.8	943.3	944.8
110°	128.2	145.9	163.7	168.2	281.2	431.8	507.2	608.9	812.2	964.7	971.4



TEST NUMBER: P936227

CATALOG NUMBER: SQ4-FB-025U-050D-92765-1D-UNV-STD-W-12-3500K

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	142.5	159.3	176.3	180.5	281.3	415.6	482.8	586.9	795.0	951.1	961.4
115°	163.9	179.5	195.1	199.1	283.9	396.9	453.5	553.8	754.3	904.7	918.9
117.5°	185.0	199.2	213.4	217.0	289.1	385.3	433.5	524.0	704.9	840.6	856.4
120°	197.4	210.7	224.1	227.4	293.4	381.3	425.3	508.0	673.4	797.4	812.7
122.5°	209.5	223.0	236.4	239.8	299.6	379.3	419.2	493.6	642.5	754.2	769.3
125°	228.0	240.3	252.6	255.6	308.0	377.7	412.5	475.7	602.2	697.0	711.0
127.5°	243.0	255.4	267.8	270.9	316.3	376.7	406.9	461.1	569.8	651.2	662.9
130°	251.0	264.4	277.8	281.1	322.3	377.2	404.7	453.1	549.8	622.2	633.1
132.5°	259.4	272.7	286.1	289.4	327.2	377.7	402.8	446.1	532.7	597.6	607.3
135°	271.7	283.9	296.0	299.0	332.6	377.3	399.6	435.9	508.3	562.7	571.1
137.5°	284.3	296.3	308.3	311.3	340.6	379.6	399.1	429.7	490.9	536.9	543.8
140°	294.7	305.8	317.0	319.7	345.5	380.0	397.2	423.6	476.6	516.3	522.7
142.5°	302.8	313.0	323.3	325.9	349.6	381.3	397.2	420.4	466.9	501.8	507.4
145°	315.2	324.1	333.0	335.3	355.0	381.3	394.5	413.6	451.6	480.1	484.2
147.5°	327.5	336.2	344.9	347.1	362.9	384.0	394.5	409.5	439.4	461.8	465.3
150°	335.5	343.4	351.2	353.2	367.0	385.3	394.5	407.2	432.5	451.4	454.2
152.5°	343.8	349.8	355.7	357.2	369.6	386.2	394.5	405.3	426.9	443.1	445.2
155°	356.2	360.5	365.0	366.1	375.5	388.2	394.5	403.1	420.3	433.2	434.6
157.5°	365.3	369.5	373.9	375.0	381.5	390.2	394.5	401.2	414.5	424.5	425.5
160°	371.5	374.8	378.2	379.0	384.2	391.1	394.5	400.3	411.7	420.2	420.8
162.5°	377.7	380.2	382.7	383.3	387.0	392.0	394.5	399.4	409.0	416.2	416.8
165°	384.4	386.6	388.9	389.5	391.1	393.4	394.5	398.0	404.9	410.1	410.6
167.5°	390.5	391.6	392.7	392.9	394.4	396.2	397.2	399.4	404.0	407.4	407.7
170°	394.5	395.6	396.7	396.9	397.0	397.1	397.2	399.4	404.0	407.4	407.4
172.5°	396.7	396.9	397.1	397.2	397.2	397.2	397.2	399.0	402.6	405.2	405.1
175°	399.6	399.6	399.6	399.6	398.8	397.8	397.2	398.4	400.6	402.3	402.3
177.5°	399.6	399.6	399.6	399.6	399.0	398.2	397.8	398.6	400.4	401.8	401.5
180°	399.6	399.6	399.6	399.6	399.6	399.6	399.6	399.6	399.6	399.6	399.6



TEST NUMBER: P936227

CATALOG NUMBER: SQ4-FB-025U-050D-92765-1D-UNV-STD-W-12-3500K

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	558.6	558.6
2.5°	596.3	592.7
5°	766.9	770.5
7.5°	1032.8	1031.0
10°	1284.2	1300.4
12.5°	1467.4	1470.9
15°	1578.8	1585.9
17.5°	1621.9	1623.7
20°	1623.7	1620.1
22.5°	1603.9	1600.3
25°	1580.6	1578.8
27.5°	1559.0	1560.8
30°	1550.0	1555.4
32.5°	1550.0	1559.0
35°	1553.6	1562.6
37.5°	1551.8	1562.6
40°	1544.6	1557.2
42.5°	1524.9	1533.9
45°	1494.3	1505.1
47.5°	1454.8	1462.0
50°	1404.5	1411.7
52.5°	1341.7	1343.5
55°	1266.3	1273.4
57.5°	1185.4	1187.2
60°	1095.6	1101.0
62.5°	1000.4	1000.4
65°	899.9	903.4
67.5°	795.7	804.6
70°	689.7	691.5
72.5°	585.6	585.6
75°	477.7	479.5
77.5°	375.3	375.3
80°	278.4	280.2
82.5°	192.2	195.8
85°	120.3	120.3
87.5°	55.7	50.3
90°	10.2	10.2
92.5°	40.9	32.8
95°	142.3	117.7
97.5°	341.0	294.2
100°	491.3	435.6
102.5°	639.0	591.4
105°	827.5	801.9
107.5°	951.1	957.2
110°	998.1	1024.8



TEST NUMBER: P936227

CATALOG NUMBER: SQ4-FB-025U-050D-92765-1D-UNV-STD-W-12-3500K

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	1002.3	1043.3
115°	975.7	1032.6
117.5°	919.4	982.4
120°	874.0	935.2
122.5°	829.8	890.2
125°	766.6	822.3
127.5°	709.9	756.9
130°	676.5	719.9
132.5°	646.2	685.0
135°	604.6	638.0
137.5°	571.2	598.7
140°	548.3	574.0
142.5°	529.4	551.5
145°	500.9	517.6
147.5°	479.2	493.0
150°	465.4	476.6
152.5°	453.6	462.1
155°	440.2	445.8
157.5°	429.5	433.5
160°	423.1	425.3
162.5°	418.9	421.0
165°	412.9	415.2
167.5°	408.6	409.5
170°	407.4	407.4
172.5°	404.2	403.4
175°	402.3	402.3
177.5°	400.6	399.6
180°	399.6	399.6



TEST NUMBER: P936227

CATALOG NUMBER: SQ4-FB-025U-050D-92765-1D-UNV-STD-W-12-3500K

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	3.98	5.01	4.81	5.87	6.95	17.17	18.20	18.00	19.07	20.14
	3H	4.69	5.63	5.54	6.50	7.60	19.03	19.96	19.87	20.83	21.93
	4H	5.00	5.88	5.86	6.76	7.87	19.68	20.57	20.54	21.44	22.56
	6H	5.26	6.08	6.13	6.96	8.09	20.13	20.94	21.00	21.83	22.96
	8H	5.33	6.11	6.21	7.02	8.14	20.25	21.03	21.14	21.94	23.06
	12H	5.36	6.10	6.24	7.00	8.15	20.33	21.07	21.22	21.97	23.13
4H	2H	11.22	12.10	12.09	12.98	14.10	17.46	18.35	18.33	19.22	20.34
	3H	12.80	13.54	13.68	14.45	15.58	19.53	20.27	20.41	21.18	22.31
	4H	12.90	13.58	13.80	14.49	15.64	20.31	20.98	21.20	21.89	23.05
	6H	12.93	13.51	13.83	14.44	15.60	20.86	21.45	21.77	22.38	23.54
	8H	12.91	13.46	13.82	14.38	15.55	21.03	21.58	21.94	22.50	23.68
	12H	12.87	13.37	13.80	14.31	15.49	21.14	21.63	22.06	22.58	23.75
8H	4H	14.37	14.92	15.28	15.84	17.01	20.38	20.93	21.29	21.86	23.03
	6H	14.62	15.08	15.55	16.04	17.21	21.02	21.48	21.96	22.45	23.62
	8H	14.64	15.04	15.59	16.00	17.19	21.25	21.65	22.20	22.61	23.80
	12H	14.62	14.97	15.57	15.92	17.16	21.41	21.76	22.36	22.71	23.95
12H	4H	14.52	15.02	15.45	15.96	17.14	20.34	20.84	21.27	21.78	22.96
	6H	14.88	15.29	15.83	16.24	17.43	21.01	21.41	21.96	22.37	23.56
	8H	14.96	15.32	15.91	16.27	17.50	21.25	21.61	22.20	22.56	23.80