

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P936241

Luminaire Tested: SQ4-FB-025U-050D-92765-1D-UNV-STD-W-6-5000K

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P936241
REPORT IS A COMBINATION OF REPORTS P933445 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-025U-050D-92765-1D-UNV-STD-W-6-5000K
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3619.1 lumens
Efficiency: N/A
Efficacy: 109.7 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 6' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 33
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P936241
CATALOG NUMBER: SQ4-FB-025U-050D-92765-1D-UNV-STD-W-6-5000K

Luminous Intensity Polar Plot

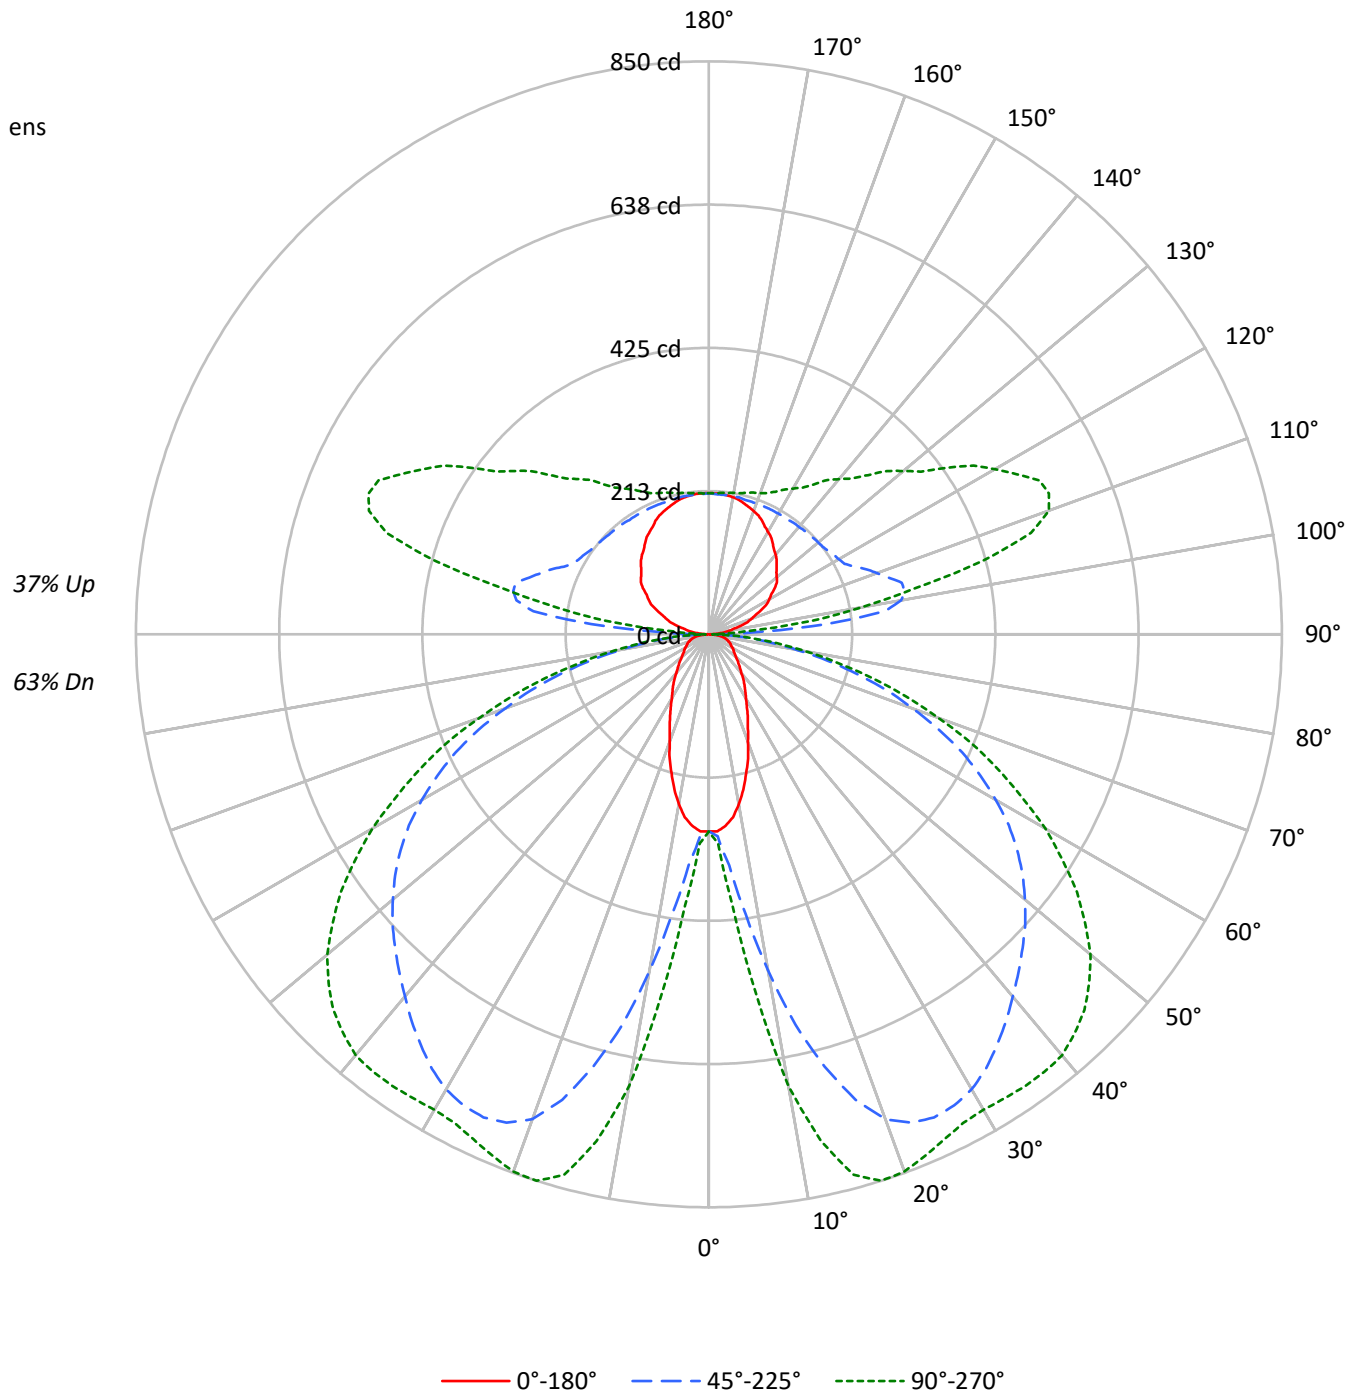



TEST NUMBER: P936241

CATALOG NUMBER: SQ4-FB-025U-050D-92765-1D-UNV-STD-W-6-5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	37.8	1.0
10°-20°	167.6	4.6
20°-30°	293.2	8.1
30°-40°	377.5	10.4
40°-50°	421.6	11.6
50°-60°	403.8	11.2
60°-70°	320.0	8.8
70°-80°	188.2	5.2
80°-90°	53.1	1.5
90°-100°	102.0	2.8
100°-110°	268.1	7.4
110°-120°	278.0	7.7
120°-130°	223.0	6.2
130°-140°	175.0	4.8
140°-150°	134.3	3.7
150°-160°	96.7	2.7
160°-170°	59.2	1.6
170°-180°	20.0	0.6
0°-30°	498.7	13.8
0°-40°	876.1	24.2
0°-60°	1701.5	47.0
0°-90°	2262.8	62.5
90°-120°	648.1	17.9
90°-150°	1180.5	32.6
90°-180°	1356.0	37.5
0°-180°	3619.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	292	292	292	292	292	
5°	285	306	344	389	403	26
15°	213	394	664	805	830	59
25°	136	447	791	825	826	63
35°	92	427	745	787	818	58
45°	63	340	658	754	788	49
55°	45	216	558	649	667	41
65°	36	115	415	466	473	35
75°	26	70	228	250	251	28
85°	9	22	56	62	63	10
90°	1	4	11	5	5	2
95°	14	53	176	91	62	15
105°	48	73	296	450	420	51
115°	86	104	237	474	541	85
125°	119	134	216	365	430	106
135°	142	157	209	295	334	110
145°	165	176	207	251	271	103
155°	186	192	207	227	233	86
165°	201	204	207	215	217	57
175°	209	209	208	211	211	20
180°	209	209	209	209	209	



TEST NUMBER: P936241

CATALOG NUMBER: SQ4-FB-025U-050D-92765-1D-UNV-STD-W-6-5000K

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	292.4	292.4	292.4	292.4	292.4	292.4	292.4	292.4	292.4	292.4	292.4
2.5°	292.4	292.4	294.2	295.2	297.1	298.1	299.9	301.8	307.4	308.4	310.2
5°	284.9	288.6	300.9	305.6	318.7	336.6	344.1	356.3	381.7	389.2	394.0
7.5°	273.6	282.1	312.1	319.7	352.6	399.6	419.3	445.7	486.0	505.9	521.8
10°	255.7	273.6	327.1	345.1	398.7	470.1	506.8	543.4	604.6	631.8	642.1
12.5°	236.0	265.2	343.1	367.6	444.7	549.0	593.3	633.7	703.3	739.9	745.5
15°	213.4	252.9	358.2	394.0	493.6	614.8	663.7	713.6	778.5	804.8	811.4
17.5°	193.7	243.5	372.3	410.0	531.2	674.1	723.9	765.3	818.0	835.8	840.5
20°	169.3	228.4	381.7	430.6	570.7	717.4	765.3	797.3	833.0	844.3	846.2
22.5°	151.3	212.5	387.3	438.1	597.0	743.7	784.1	809.5	833.9	837.7	838.6
25°	136.4	194.6	386.4	446.6	619.6	759.6	790.7	809.5	823.6	825.4	825.4
27.5°	122.3	174.9	382.7	448.5	636.5	763.5	787.9	801.0	807.6	811.4	811.4
30°	110.0	156.1	373.2	444.7	644.0	759.6	779.5	786.0	792.5	798.2	801.0
32.5°	100.6	138.2	359.1	437.2	644.9	750.3	764.4	768.1	777.5	790.7	795.4
35°	92.2	120.4	343.1	426.9	639.3	735.2	744.6	748.4	767.2	786.9	793.5
37.5°	83.7	107.2	322.5	409.0	630.8	717.4	723.9	730.6	759.6	783.2	790.7
40°	75.2	95.9	298.1	389.2	617.7	695.7	701.4	711.7	750.3	777.5	785.1
42.5°	68.6	86.5	271.7	368.6	600.7	671.3	679.7	694.8	739.0	768.1	776.6
45°	63.0	77.1	243.5	340.3	579.1	645.9	658.1	678.8	725.8	754.0	761.5
47.5°	57.4	70.5	214.3	311.2	555.7	620.6	636.5	660.0	707.9	735.2	741.8
50°	52.6	63.9	185.3	280.1	530.3	593.3	612.0	636.5	685.4	710.8	719.3
52.5°	48.9	58.3	158.0	249.2	501.1	565.0	586.7	612.0	658.1	682.6	688.2
55°	45.1	53.6	134.4	216.2	471.0	534.9	558.5	582.9	628.0	648.7	652.5
57.5°	43.3	49.8	114.7	185.3	439.0	501.1	527.5	550.0	592.3	608.3	612.0
60°	40.5	47.0	99.6	158.9	404.3	469.1	491.7	514.3	550.0	563.2	566.0
62.5°	37.6	45.1	88.4	133.5	368.6	431.6	454.1	474.8	504.8	514.3	518.0
65°	35.7	43.3	79.9	114.7	331.9	392.0	414.6	432.5	456.9	466.3	468.2
67.5°	33.8	41.4	73.4	98.7	295.2	352.6	369.5	386.4	405.2	414.6	415.6
70°	31.0	39.4	67.7	87.4	257.6	307.4	321.5	339.4	354.4	359.1	362.0
72.5°	29.2	36.6	63.9	79.0	219.1	264.1	277.3	287.7	300.9	305.6	305.6
75°	26.4	32.9	60.2	70.5	179.6	216.2	227.5	237.9	248.2	250.1	247.2
77.5°	23.5	29.2	51.7	59.3	140.1	171.1	180.5	186.2	194.6	196.5	197.4
80°	19.7	25.4	40.5	46.1	101.5	126.0	132.5	137.3	144.8	144.8	146.7
82.5°	15.0	19.7	29.2	32.9	68.6	86.5	92.2	95.0	99.6	99.6	99.6
85°	9.4	12.2	18.8	21.6	41.4	52.6	56.5	57.4	61.1	62.1	62.1
87.5°	4.7	6.5	12.2	13.2	21.6	27.3	27.3	29.2	29.2	28.2	27.3
90°	1.4	2.5	3.6	3.9	6.2	9.2	10.7	9.4	7.1	5.3	5.3
92.5°	5.6	15.1	24.7	27.1	38.1	52.8	60.1	52.6	37.8	26.6	25.6
95°	13.5	30.9	48.4	52.8	93.8	148.3	175.6	156.8	118.9	90.6	87.4
97.5°	23.3	38.7	54.1	58.0	126.3	217.3	262.8	250.9	227.0	209.1	203.0
100°	30.9	44.9	58.9	62.3	138.1	239.2	289.7	290.5	292.3	293.6	286.3
102.5°	37.4	50.5	63.5	66.7	143.6	246.0	297.2	312.5	342.9	365.8	359.6
105°	48.3	59.4	70.4	73.2	147.6	246.8	296.4	330.5	398.8	450.1	446.7
107.5°	59.5	69.8	80.1	82.7	148.3	235.8	279.6	327.2	422.5	493.9	494.7
110°	67.1	76.5	85.7	88.0	147.2	226.1	265.5	318.8	425.3	505.1	508.6



TEST NUMBER: P936241

CATALOG NUMBER: SQ4-FB-025U-050D-92765-1D-UNV-STD-W-6-5000K

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	74.6	83.5	92.3	94.5	147.2	217.6	252.7	307.2	416.2	497.9	503.2
115°	85.8	94.0	102.2	104.2	148.6	207.8	237.4	289.9	394.9	473.6	481.1
117.5°	96.9	104.3	111.7	113.6	151.3	201.7	226.9	274.3	369.0	440.1	448.3
120°	103.4	110.4	117.3	119.1	153.7	199.7	222.7	266.0	352.6	417.5	425.6
122.5°	109.6	116.7	123.8	125.5	156.8	198.6	219.5	258.4	336.4	394.9	402.9
125°	119.4	125.8	132.3	133.8	161.2	197.8	216.0	249.1	315.4	365.0	372.3
127.5°	127.2	133.7	140.2	141.8	165.5	197.2	213.0	241.4	298.4	341.0	347.1
130°	131.4	138.4	145.3	147.1	168.7	197.5	211.9	237.2	287.8	325.7	331.4
132.5°	135.8	142.8	149.7	151.5	171.3	197.8	211.0	233.6	278.9	312.8	317.9
135°	142.3	148.6	155.0	156.6	174.1	197.6	209.3	228.3	266.2	294.6	299.0
137.5°	148.9	155.2	161.4	163.0	178.3	198.8	209.0	225.1	257.1	281.2	284.7
140°	154.3	160.1	165.9	167.4	181.0	199.0	208.0	221.8	249.6	270.3	273.7
142.5°	158.5	163.9	169.3	170.6	183.0	199.7	208.0	220.1	244.5	262.7	265.6
145°	165.0	169.6	174.3	175.5	185.9	199.7	206.6	216.5	236.4	251.3	253.5
147.5°	171.4	176.0	180.6	181.7	190.0	201.1	206.6	214.4	230.0	241.8	243.6
150°	175.6	179.7	184.0	185.0	192.2	201.8	206.6	213.2	226.4	236.3	237.8
152.5°	180.0	183.1	186.3	187.0	193.6	202.3	206.6	212.2	223.5	232.0	233.1
155°	186.5	188.8	191.1	191.7	196.7	203.3	206.6	211.1	220.0	226.8	227.5
157.5°	191.2	193.5	195.7	196.3	199.7	204.3	206.6	210.0	217.0	222.3	222.8
160°	194.5	196.3	198.0	198.4	201.1	204.8	206.6	209.6	215.5	220.0	220.3
162.5°	197.7	199.0	200.3	200.7	202.6	205.3	206.6	209.1	214.1	218.0	218.3
165°	201.2	202.4	203.6	203.9	204.8	206.0	206.6	208.3	212.0	214.7	215.0
167.5°	204.4	205.0	205.5	205.7	206.5	207.5	208.0	209.2	211.5	213.3	213.4
170°	206.6	207.1	207.7	207.8	207.9	208.0	208.0	209.2	211.5	213.3	213.3
172.5°	207.7	207.8	208.0	208.0	208.0	208.0	208.0	208.9	210.8	212.2	212.1
175°	209.3	209.3	209.3	209.3	208.8	208.3	208.0	208.5	209.7	210.7	210.7
177.5°	209.3	209.3	209.3	209.3	208.9	208.4	208.3	208.7	209.7	210.4	210.3
180°	209.3	209.3	209.3	209.3	209.3	209.3	209.3	209.3	209.3	209.3	209.3



TEST NUMBER: P936241

CATALOG NUMBER: SQ4-FB-025U-050D-92765-1D-UNV-STD-W-6-5000K

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	292.4	292.4
2.5°	312.1	310.2
5°	401.5	403.3
7.5°	540.6	539.7
10°	672.2	680.7
12.5°	768.1	770.0
15°	826.5	830.2
17.5°	849.0	849.9
20°	849.9	848.1
22.5°	839.6	837.7
25°	827.4	826.5
27.5°	816.1	817.0
30°	811.4	814.2
32.5°	811.4	816.1
35°	813.3	818.0
37.5°	812.4	818.0
40°	808.5	815.2
42.5°	798.2	802.9
45°	782.3	787.9
47.5°	761.5	765.3
50°	735.2	739.0
52.5°	702.3	703.3
55°	662.8	666.6
57.5°	620.6	621.5
60°	573.5	576.3
62.5°	523.7	523.7
65°	471.0	472.9
67.5°	416.5	421.2
70°	361.1	362.0
72.5°	306.5	306.5
75°	250.1	251.1
77.5°	196.5	196.5
80°	145.7	146.7
82.5°	100.6	102.4
85°	63.0	63.0
87.5°	29.2	26.4
90°	5.3	5.3
92.5°	21.3	17.1
95°	74.5	61.7
97.5°	178.5	154.0
100°	257.2	228.1
102.5°	334.6	309.7
105°	433.3	419.9
107.5°	497.9	501.2
110°	522.6	536.6



TEST NUMBER: P936241

CATALOG NUMBER: SQ4-FB-025U-050D-92765-1D-UNV-STD-W-6-5000K

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	524.7	546.2
115°	510.8	540.6
117.5°	481.4	514.4
120°	457.6	489.7
122.5°	434.5	466.0
125°	401.4	430.5
127.5°	371.7	396.3
130°	354.2	376.9
132.5°	338.3	358.6
135°	316.5	334.1
137.5°	299.1	313.4
140°	287.0	300.5
142.5°	277.1	288.7
145°	262.3	271.1
147.5°	250.9	258.1
150°	243.7	249.6
152.5°	237.5	242.0
155°	230.4	233.4
157.5°	224.9	226.9
160°	221.5	222.7
162.5°	219.4	220.5
165°	216.2	217.4
167.5°	214.0	214.4
170°	213.3	213.3
172.5°	211.6	211.2
175°	210.7	210.7
177.5°	209.7	209.3
180°	209.3	209.3



TEST NUMBER: P936241

CATALOG NUMBER: SQ4-FB-025U-050D-92765-1D-UNV-STD-W-6-5000K

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	4.12	5.16	4.96	6.02	7.10	17.29	18.33	18.12	19.19	20.27
	3H	4.84	5.78	5.69	6.65	7.75	19.14	20.07	19.98	20.94	22.05
	4H	5.15	6.03	6.01	6.91	8.03	19.79	20.67	20.65	21.55	22.66
	6H	5.41	6.23	6.28	7.11	8.24	20.22	21.04	21.10	21.92	23.05
	8H	5.48	6.26	6.36	7.17	8.29	20.35	21.13	21.23	22.03	23.16
	12H	5.51	6.25	6.39	7.15	8.30	20.42	21.16	21.31	22.06	23.21
4H	2H	11.35	12.24	12.22	13.12	14.23	17.59	18.47	18.45	19.35	20.46
	3H	12.94	13.68	13.82	14.59	15.72	19.64	20.38	20.52	21.29	22.42
	4H	13.04	13.72	13.93	14.62	15.78	20.41	21.09	21.30	22.00	23.15
	6H	13.06	13.65	13.97	14.58	15.74	20.96	21.55	21.86	22.48	23.63
	8H	13.04	13.59	13.95	14.52	15.69	21.12	21.67	22.03	22.60	23.77
	12H	13.01	13.50	13.94	14.45	15.62	21.22	21.72	22.15	22.66	23.84
8H	4H	14.50	15.05	15.40	15.97	17.14	20.49	21.04	21.40	21.96	23.14
	6H	14.75	15.20	15.68	16.17	17.34	21.12	21.58	22.06	22.54	23.72
	8H	14.77	15.17	15.71	16.13	17.32	21.34	21.75	22.29	22.70	23.89
	12H	14.74	15.10	15.69	16.05	17.29	21.49	21.85	22.44	22.80	24.04
12H	4H	14.65	15.14	15.58	16.09	17.26	20.45	20.95	21.38	21.89	23.07
	6H	15.01	15.41	15.95	16.37	17.56	21.11	21.51	22.05	22.47	23.66
	8H	15.08	15.44	16.03	16.39	17.63	21.34	21.70	22.29	22.65	23.89