

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P936243

Luminaire Tested: SQ4-FB-025U-050D-92765-1D-UNV-STD-W-8-2700K

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P936243
REPORT IS A COMBINATION OF REPORTS P933453 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-025U-050D-92765-1D-UNV-STD-W-8-2700K
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4409.9 lumens
Efficiency: N/A
Efficacy: 100.2 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 8' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 44
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P936243
CATALOG NUMBER: SQ4-FB-025U-050D-92765-1D-UNV-STD-W-8-2700K

Luminous Intensity Polar Plot

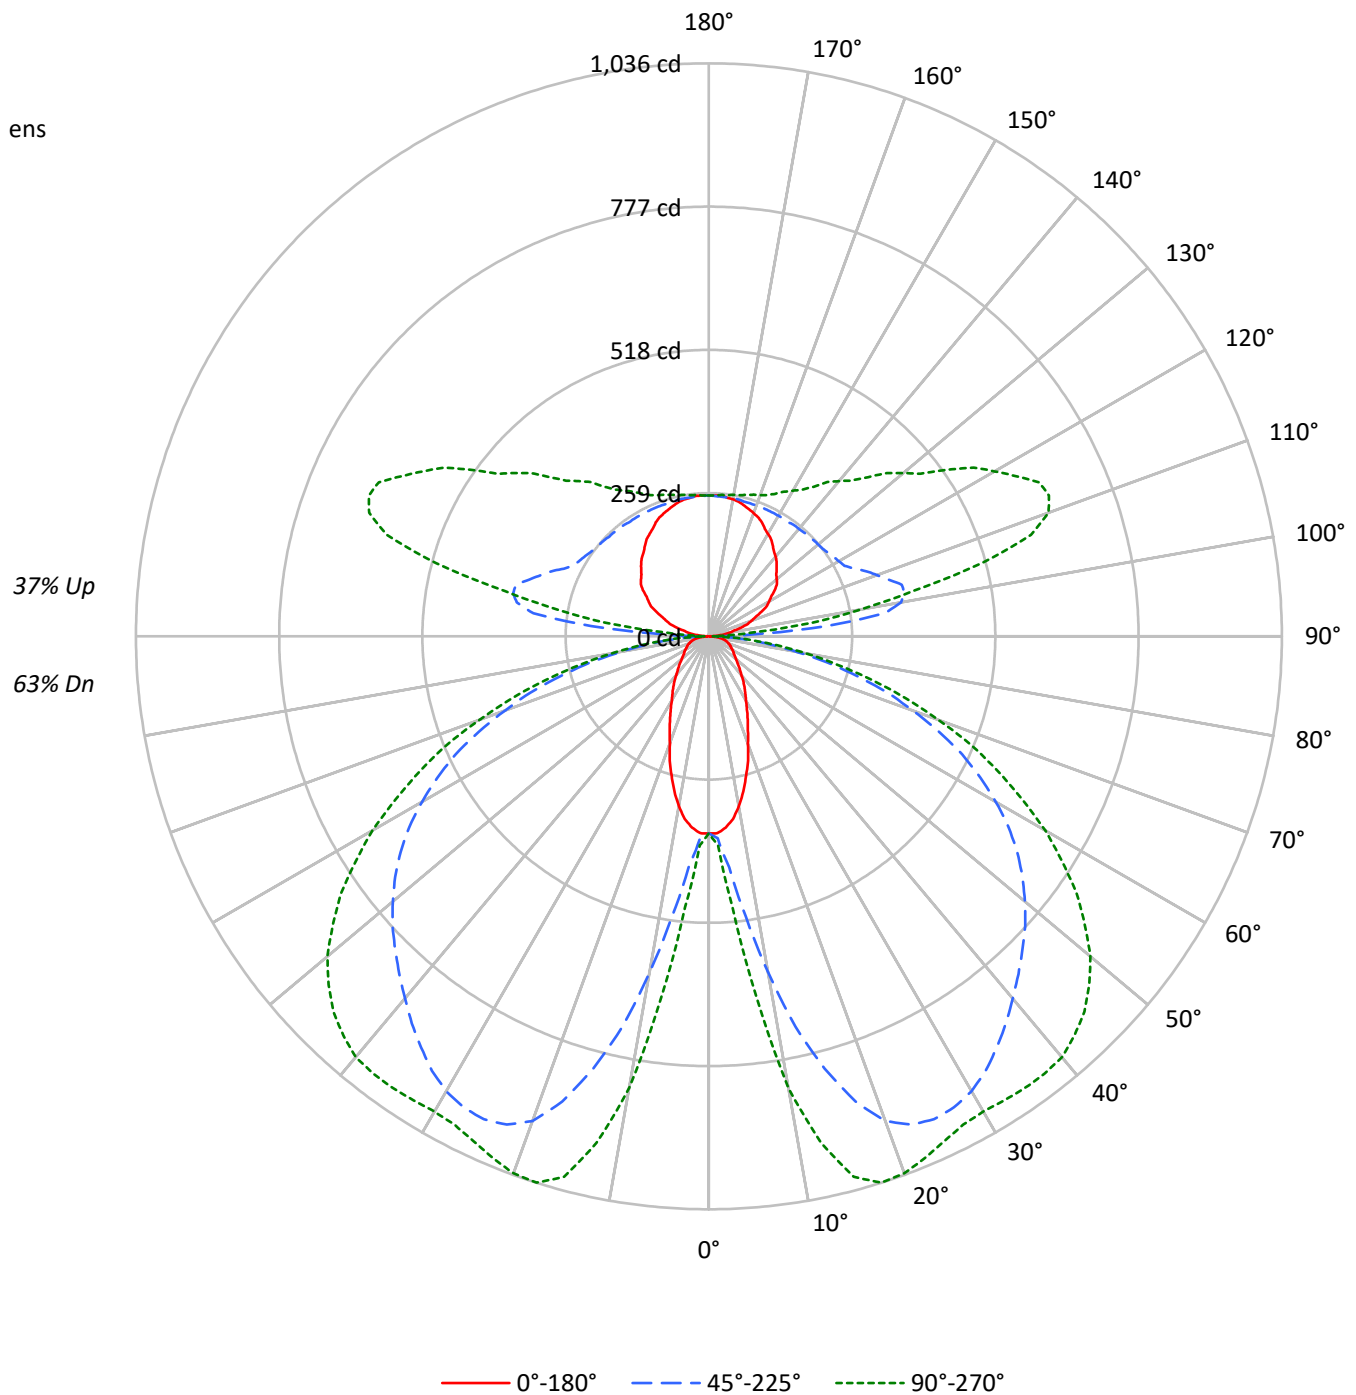



TEST NUMBER: P936243

CATALOG NUMBER: SQ4-FB-025U-050D-92765-1D-UNV-STD-W-8-2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	103	103	103	103	90	90	90	78	78	78	68	68	68	63
1	100	95	91	87	93	89	86	82	78	75	73	68	66	64	59	57	56	51
2	90	82	76	70	84	77	71	66	68	63	59	59	55	52	51	48	46	42
3	82	72	64	57	76	67	60	55	59	53	49	51	47	43	44	41	38	34
4	75	63	54	48	69	59	52	46	52	46	41	45	40	37	39	35	32	29
5	68	56	47	41	63	52	45	39	46	40	35	40	35	31	35	31	28	24
6	63	50	41	35	58	47	39	33	41	35	30	36	31	27	31	27	24	21
7	58	45	36	30	54	42	34	29	37	31	26	33	27	23	28	24	21	18
8	53	40	32	26	50	38	31	25	34	27	23	30	24	21	26	22	18	16
9	50	37	29	23	46	35	27	22	31	25	20	27	22	18	24	19	16	14
10	46	34	26	21	43	32	25	20	28	22	18	25	20	16	22	18	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1653	1653	1653
5°	1615	1911	2222
10°	1465	2785	3683
15°	1245	3639	4448
20°	1013	4216	4533
25°	845	4413	4441
30°	713	4440	4433
35°	630	4366	4547
40°	549	4271	4666
45°	498	4200	4684
50°	456	4137	4607
55°	437	4045	4403
60°	448	3868	4080
65°	466	3597	3637
70°	496	3137	3073
75°	550	2557	2398
80°	601	1774	1615
85°	531	942	827

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 4684 cd/sqm



TEST NUMBER: P936243

CATALOG NUMBER: SQ4-FB-025U-050D-92765-1D-UNV-STD-W-8-2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	46.1	1.0
10°-20°	204.3	4.6
20°-30°	357.3	8.1
30°-40°	459.9	10.4
40°-50°	513.7	11.6
50°-60°	492.0	11.2
60°-70°	390.0	8.8
70°-80°	229.3	5.2
80°-90°	64.7	1.5
90°-100°	124.3	2.8
100°-110°	326.7	7.4
110°-120°	338.8	7.7
120°-130°	271.7	6.2
130°-140°	213.2	4.8
140°-150°	163.7	3.7
150°-160°	117.8	2.7
160°-170°	72.1	1.6
170°-180°	24.4	0.6
0°-30°	607.6	13.8
0°-40°	1067.6	24.2
0°-60°	2073.3	47.0
0°-90°	2757.3	62.5
90°-120°	789.7	17.9
90°-150°	1438.3	32.6
90°-180°	1653.0	37.5
0°-180°	4409.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	356	356	356	356	356	
5°	347	372	419	474	492	32
15°	260	480	809	981	1012	72
25°	166	544	964	1006	1007	77
35°	112	520	907	959	997	70
45°	77	415	802	919	960	59
55°	55	264	680	790	812	50
65°	44	140	505	568	576	43
75°	32	86	277	305	306	34
85°	11	26	69	76	77	12
90°	2	5	13	6	6	2
95°	16	64	214	110	75	18
105°	59	89	361	548	512	62
115°	104	127	289	577	659	103
125°	146	163	263	445	525	129
135°	173	191	255	359	407	134
145°	201	214	252	306	330	126
155°	227	234	252	276	284	104
165°	245	248	252	262	265	69
175°	255	255	253	257	257	24
180°	255	255	255	255	255	



TEST NUMBER: P936243

CATALOG NUMBER: SQ4-FB-025U-050D-92765-1D-UNV-STD-W-8-2700K

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	356.3	356.3	356.3	356.3	356.3	356.3	356.3	356.3	356.3	356.3	356.3
2.5°	356.3	356.3	358.6	359.8	362.0	363.2	365.5	367.8	374.6	375.7	378.0
5°	347.1	351.7	366.6	372.3	388.4	410.2	419.3	434.2	465.2	474.3	480.0
7.5°	333.4	343.7	380.3	389.5	429.6	486.9	510.9	543.1	592.3	616.3	635.8
10°	311.6	333.4	398.7	420.5	485.7	572.8	617.5	662.2	736.6	769.8	782.5
12.5°	287.6	323.0	418.2	447.9	541.9	669.0	722.9	772.1	856.9	901.6	908.5
15°	260.1	308.2	436.5	480.0	601.5	749.2	808.9	869.5	948.6	980.6	988.7
17.5°	236.0	296.7	453.7	499.5	647.3	821.4	882.1	932.5	996.7	1018.5	1024.2
20°	206.2	278.4	465.2	524.7	695.4	874.1	932.5	971.5	1015.0	1028.8	1031.1
22.5°	184.4	258.9	472.0	533.8	727.5	906.2	955.4	986.4	1016.2	1020.8	1021.9
25°	166.1	237.1	470.9	544.2	755.0	925.7	963.5	986.4	1003.6	1005.9	1005.9
27.5°	149.0	213.1	466.3	546.5	775.6	930.2	960.0	976.1	984.1	988.7	988.7
30°	134.0	190.2	454.8	541.9	784.8	925.7	949.7	957.7	965.8	972.7	976.1
32.5°	122.6	168.4	437.7	532.7	785.9	914.2	931.4	936.0	947.4	963.5	969.2
35°	112.2	146.7	418.2	520.1	779.1	895.9	907.3	912.0	934.8	958.9	966.9
37.5°	102.0	130.6	393.0	498.4	768.7	874.1	882.1	890.2	925.7	954.3	963.5
40°	91.6	116.8	363.2	474.3	752.7	847.8	854.6	867.3	914.2	947.4	956.6
42.5°	83.6	105.4	331.1	449.1	732.1	818.0	828.3	846.6	900.5	936.0	946.3
45°	76.8	94.0	296.7	414.7	705.7	787.1	801.9	827.1	884.4	918.8	927.9
47.5°	69.9	85.9	261.2	379.2	677.1	756.2	775.6	804.2	862.7	895.9	903.9
50°	64.1	77.9	225.7	341.4	646.1	722.9	745.8	775.6	835.2	866.1	876.4
52.5°	59.5	71.1	192.4	303.6	610.6	688.5	714.9	745.8	801.9	831.7	838.6
55°	55.0	65.3	163.8	263.5	574.0	651.9	680.5	710.3	765.3	790.5	795.1
57.5°	52.7	60.7	139.7	225.7	535.0	610.6	642.7	670.2	721.7	741.2	745.8
60°	49.3	57.3	121.5	193.6	492.7	571.7	599.2	626.7	670.2	686.2	689.7
62.5°	45.9	55.0	107.7	162.7	449.1	525.9	553.3	578.6	615.2	626.7	631.3
65°	43.6	52.7	97.4	139.7	404.4	477.7	505.2	527.0	556.8	568.3	570.6
67.5°	41.3	50.4	89.3	120.3	359.8	429.6	450.2	470.9	493.8	505.2	506.3
70°	37.8	48.1	82.5	106.5	313.9	374.6	391.8	413.6	431.9	437.7	441.1
72.5°	35.5	44.7	77.9	96.3	266.9	321.9	338.0	350.5	366.6	372.3	372.3
75°	32.1	40.1	73.3	85.9	218.8	263.5	277.2	289.8	302.4	304.8	301.3
77.5°	28.6	35.5	63.0	72.2	170.7	208.5	219.9	226.9	237.1	239.4	240.6
80°	24.1	30.9	49.3	56.1	123.8	153.5	161.5	167.2	176.5	176.5	178.7
82.5°	18.4	24.1	35.5	40.1	83.6	105.4	112.2	115.7	121.5	121.5	121.5
85°	11.4	14.9	22.9	26.3	50.4	64.1	68.8	69.9	74.5	75.6	75.6
87.5°	5.7	8.0	14.9	16.1	26.3	33.2	33.2	35.5	35.5	34.3	33.2
90°	1.7	3.1	4.4	4.8	7.5	11.2	13.0	11.5	8.6	6.5	6.5
92.5°	6.8	18.4	30.2	33.1	46.5	64.3	73.2	64.1	46.1	32.5	31.3
95°	16.4	37.7	59.0	64.3	114.2	180.7	214.0	191.0	144.9	110.4	106.4
97.5°	28.4	47.2	65.9	70.6	153.8	264.8	320.3	305.8	276.7	254.8	247.4
100°	37.7	54.7	71.7	75.9	168.3	291.3	352.9	354.0	356.2	357.8	348.9
102.5°	45.5	61.4	77.3	81.2	174.9	299.8	362.2	380.8	417.8	445.7	438.1
105°	58.8	72.3	85.8	89.2	179.9	300.7	361.2	402.8	486.0	548.4	544.3
107.5°	72.5	85.1	97.6	100.8	180.7	287.3	340.6	398.6	514.7	601.7	602.8
110°	81.8	93.1	104.5	107.3	179.4	275.5	323.5	388.4	518.1	615.4	619.7



TEST NUMBER: P936243

CATALOG NUMBER: SQ4-FB-025U-050D-92765-1D-UNV-STD-W-8-2700K

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	90.9	101.6	112.4	115.1	179.5	265.1	308.0	374.4	507.1	606.7	613.3
115°	104.5	114.5	124.4	126.9	181.1	253.2	289.3	353.3	481.2	577.1	586.2
117.5°	118.0	127.1	136.1	138.5	184.5	245.8	276.5	334.2	449.6	536.2	546.3
120°	125.9	134.4	143.0	145.1	187.2	243.3	271.4	324.1	429.5	508.6	518.4
122.5°	133.6	142.2	150.8	153.0	191.2	242.0	267.4	314.9	409.9	481.1	490.8
125°	145.5	153.3	161.1	163.1	196.4	240.9	263.2	303.5	384.2	444.7	453.5
127.5°	155.0	162.9	170.8	172.8	201.7	240.3	259.6	294.2	363.5	415.4	423.0
130°	160.1	168.7	177.1	179.3	205.6	240.7	258.2	289.0	350.7	396.9	403.8
132.5°	165.4	174.0	182.4	184.6	208.7	240.9	257.0	284.6	339.8	381.2	387.4
135°	173.3	181.1	188.8	190.8	212.2	240.7	255.0	278.1	324.3	359.0	364.3
137.5°	181.3	189.0	196.7	198.7	217.3	242.1	254.6	274.2	313.2	342.5	346.9
140°	188.0	195.1	202.2	204.0	220.5	242.4	253.4	270.3	304.1	329.4	333.5
142.5°	193.2	199.7	206.3	207.9	223.1	243.3	253.4	268.3	297.9	320.1	323.6
145°	201.1	206.8	212.4	213.9	226.5	243.3	251.7	263.8	288.1	306.3	308.9
147.5°	208.9	214.5	220.0	221.4	231.5	245.0	251.7	261.3	280.3	294.6	296.8
150°	214.0	219.1	224.0	225.3	234.1	245.8	251.7	259.7	275.9	287.9	289.7
152.5°	219.3	223.1	226.9	227.9	235.8	246.4	251.7	258.5	272.3	282.6	284.0
155°	227.2	230.0	232.8	233.5	239.6	247.7	251.7	257.2	268.1	276.3	277.2
157.5°	233.0	235.7	238.5	239.2	243.3	248.9	251.7	256.0	264.4	270.8	271.4
160°	236.9	239.1	241.2	241.7	245.0	249.5	251.7	255.4	262.6	268.1	268.5
162.5°	240.9	242.5	244.0	244.5	246.8	250.1	251.7	254.8	260.9	265.5	265.9
165°	245.2	246.7	248.1	248.5	249.6	251.0	251.7	253.9	258.3	261.6	262.0
167.5°	249.1	249.8	250.5	250.7	251.6	252.8	253.4	254.9	257.8	259.9	260.1
170°	251.7	252.4	253.1	253.2	253.3	253.4	253.4	254.9	257.8	259.9	259.9
172.5°	253.1	253.2	253.4	253.4	253.4	253.4	253.4	254.5	256.8	258.5	258.4
175°	255.0	255.0	255.0	255.0	254.4	253.8	253.4	254.1	255.6	256.7	256.7
177.5°	255.0	255.0	255.0	255.0	254.5	254.0	253.8	254.4	255.5	256.3	256.2
180°	255.0	255.0	255.0	255.0	255.0	255.0	255.0	255.0	255.0	255.0	255.0



TEST NUMBER: P936243

CATALOG NUMBER: SQ4-FB-025U-050D-92765-1D-UNV-STD-W-8-2700K

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	356.3	356.3
2.5°	380.3	378.0
5°	489.2	491.5
7.5°	658.7	657.6
10°	819.1	829.4
12.5°	936.0	938.3
15°	1007.0	1011.6
17.5°	1034.5	1035.6
20°	1035.6	1033.3
22.5°	1023.1	1020.8
25°	1008.1	1007.0
27.5°	994.4	995.6
30°	988.7	992.2
32.5°	988.7	994.4
35°	991.0	996.7
37.5°	989.8	996.7
40°	985.2	993.3
42.5°	972.7	978.4
45°	953.2	960.0
47.5°	927.9	932.5
50°	895.9	900.5
52.5°	855.8	856.9
55°	807.7	812.3
57.5°	756.2	757.3
60°	698.8	702.3
62.5°	638.1	638.1
65°	574.0	576.3
67.5°	507.5	513.2
70°	440.0	441.1
72.5°	373.5	373.5
75°	304.8	305.9
77.5°	239.4	239.4
80°	177.6	178.7
82.5°	122.6	124.9
85°	76.8	76.8
87.5°	35.5	32.1
90°	6.5	6.5
92.5°	26.1	20.8
95°	90.8	75.1
97.5°	217.5	187.7
100°	313.4	277.8
102.5°	407.7	377.3
105°	527.9	511.5
107.5°	606.7	610.6
110°	636.7	653.7



TEST NUMBER: P936243

CATALOG NUMBER: SQ4-FB-025U-050D-92765-1D-UNV-STD-W-8-2700K

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	639.4	665.5
115°	622.5	658.7
117.5°	586.5	626.8
120°	557.5	596.6
122.5°	529.3	567.8
125°	489.1	524.6
127.5°	452.9	482.8
130°	431.5	459.2
132.5°	412.2	437.0
135°	385.6	407.0
137.5°	364.4	381.9
140°	349.8	366.2
142.5°	337.7	351.7
145°	319.6	330.2
147.5°	305.6	314.5
150°	296.9	304.1
152.5°	289.4	294.8
155°	280.8	284.3
157.5°	274.0	276.5
160°	269.9	271.4
162.5°	267.3	268.6
165°	263.4	264.9
167.5°	260.7	261.3
170°	259.9	259.9
172.5°	257.9	257.3
175°	256.7	256.7
177.5°	255.6	255.0
180°	255.0	255.0



TEST NUMBER: P936243

CATALOG NUMBER: SQ4-FB-025U-050D-92765-1D-UNV-STD-W-8-2700K

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	3.81	4.85	4.65	5.71	6.79	17.00	18.03	17.83	18.90	19.97
	3H	4.53	5.47	5.38	6.34	7.44	18.85	19.78	19.69	20.65	21.76
	4H	4.84	5.72	5.70	6.60	7.72	19.50	20.39	20.36	21.26	22.38
	6H	5.10	5.92	5.97	6.80	7.93	19.94	20.76	20.82	21.64	22.77
	8H	5.17	5.95	6.06	6.86	7.98	20.07	20.85	20.95	21.75	22.88
	12H	5.20	5.94	6.09	6.84	7.99	20.14	20.88	21.03	21.78	22.94
4H	2H	11.05	11.94	11.92	12.82	13.93	17.29	18.18	18.16	19.05	20.17
	3H	12.64	13.38	13.51	14.29	15.42	19.35	20.09	20.23	21.00	22.13
	4H	12.74	13.42	13.63	14.32	15.48	20.13	20.80	21.02	21.71	22.87
	6H	12.76	13.35	13.67	14.28	15.43	20.68	21.26	21.58	22.19	23.35
	8H	12.74	13.29	13.65	14.22	15.39	20.84	21.39	21.75	22.32	23.49
	12H	12.71	13.20	13.64	14.15	15.32	20.95	21.44	21.88	22.39	23.56
8H	4H	14.20	14.75	15.11	15.67	16.84	20.20	20.75	21.11	21.68	22.85
	6H	14.45	14.91	15.39	15.87	17.04	20.84	21.30	21.78	22.26	23.43
	8H	14.47	14.87	15.42	15.83	17.02	21.06	21.47	22.01	22.42	23.61
	12H	14.45	14.80	15.40	15.75	16.99	21.22	21.57	22.17	22.52	23.76
12H	4H	14.35	14.85	15.28	15.79	16.97	20.16	20.66	21.09	21.60	22.78
	6H	14.71	15.12	15.66	16.07	17.26	20.83	21.23	21.77	22.19	23.38
	8H	14.79	15.15	15.74	16.10	17.33	21.07	21.42	22.01	22.37	23.61