

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P936430

Luminaire Tested: SQ4-FB-025U-100D-92765-1D-UNV-STD-W-12-6500K

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P936430
REPORT IS A COMBINATION OF REPORTS P933431 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-025U-100D-92765-1D-UNV-STD-W-12-6500K
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 11895.0 lumens
Efficiency: N/A
Efficacy: 102.2 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 12' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 116.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P936430
CATALOG NUMBER: SQ4-FB-025U-100D-92765-1D-UNV-STD-W-12-6500K

Luminous Intensity Polar Plot

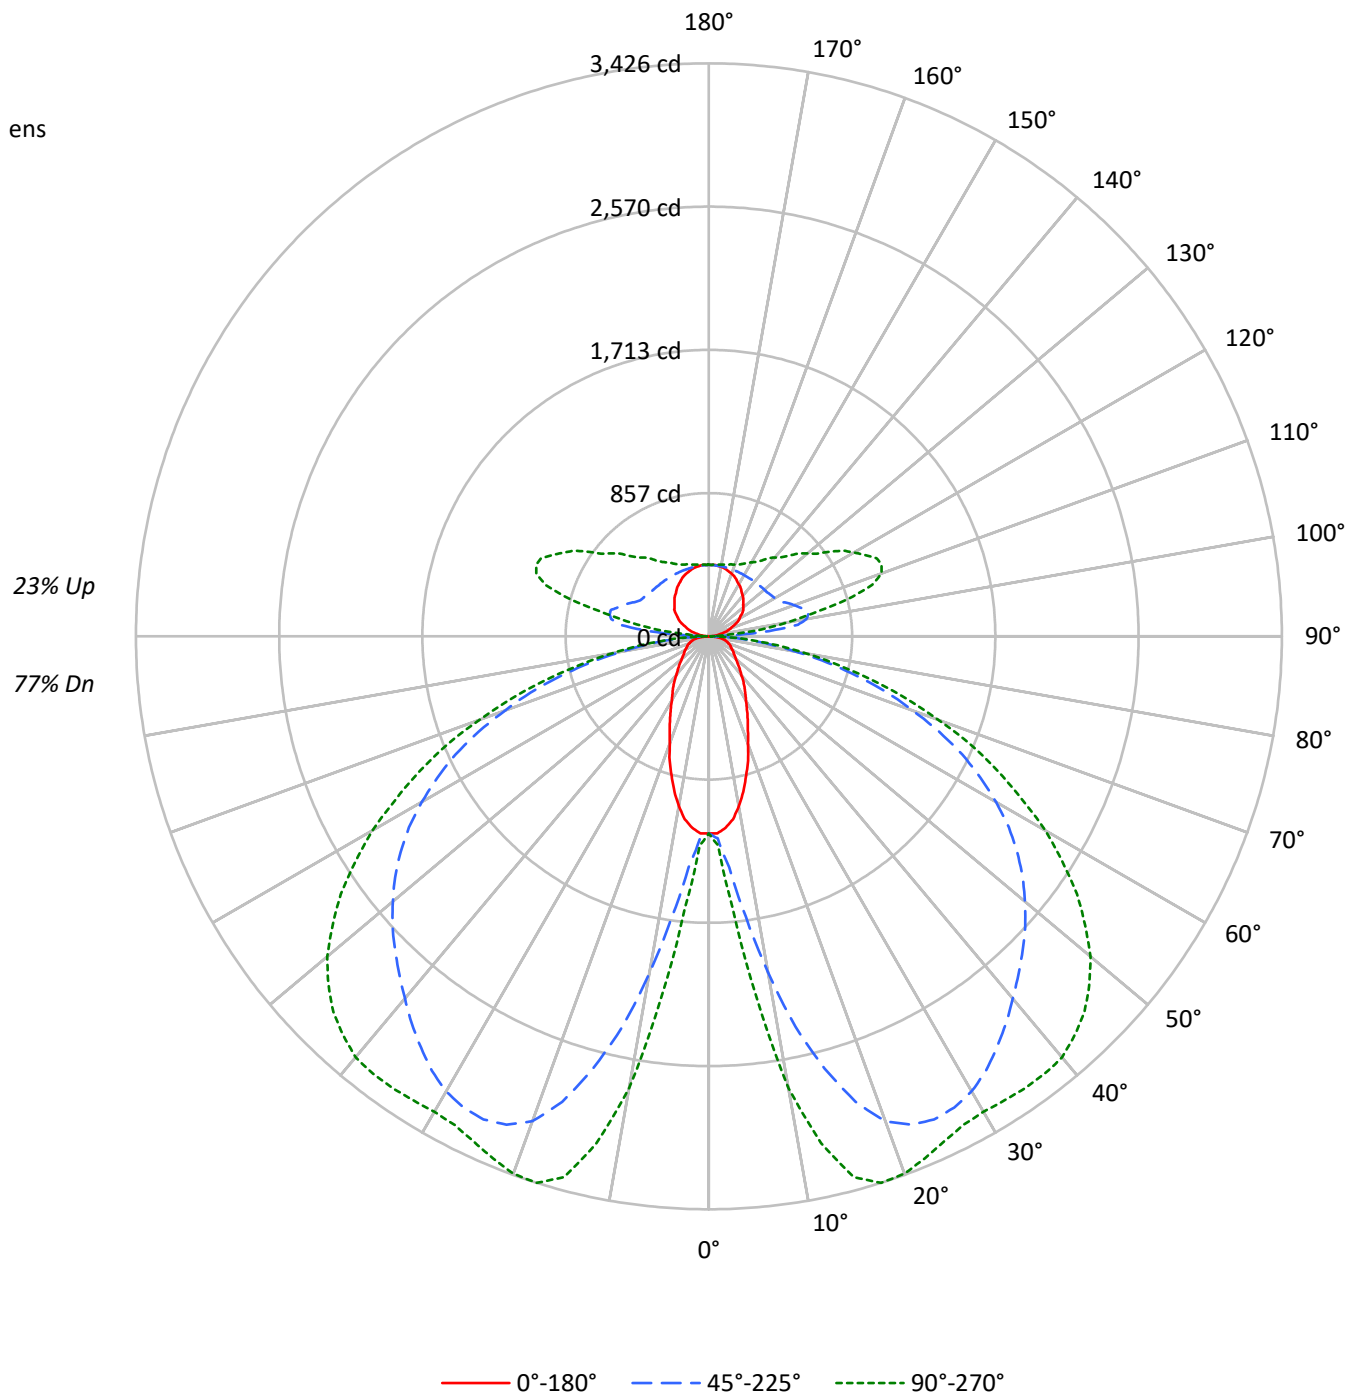



TEST NUMBER: P936430

CATALOG NUMBER: SQ4-FB-025U-100D-92765-1D-UNV-STD-W-12-6500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	113	113	113	113	108	108	108	108	98	98	98	89	89	89	81	81	81	77			77
1	103	98	94	90	98	94	90	86	85	82	79	77	75	73	70	68	66	63			63
2	93	85	78	72	88	81	75	69	73	68	64	67	63	59	61	57	55	51			51
3	84	74	65	59	80	70	63	57	64	58	53	58	53	49	53	49	45	42			42
4	77	65	56	49	73	62	54	47	56	50	44	51	46	41	47	42	38	35			35
5	70	57	48	42	66	55	46	40	50	43	38	46	40	35	41	37	33	30			30
6	64	51	42	36	61	49	41	35	45	38	32	41	35	30	37	32	28	26			26
7	59	46	37	31	56	44	36	30	40	33	28	37	31	27	34	29	25	22			22
8	55	42	33	27	52	40	32	26	37	30	25	34	28	23	31	26	22	20			20
9	51	38	30	24	49	36	29	23	33	27	22	31	25	21	28	23	19	17			17
10	48	35	27	21	45	33	26	21	31	24	20	28	23	19	26	21	17	16			16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3646	3646	3646
5°	3563	4215	4900
10°	3233	6145	8124
15°	2749	8031	9810
20°	2238	9309	9998
25°	1868	9743	9795
30°	1576	9808	9776
35°	1394	9647	10029
40°	1216	9438	10290
45°	1102	9286	10330
50°	1012	9150	10159
55°	970	8949	9709
60°	993	8560	8998
65°	1035	7966	8021
70°	1106	6952	6776
75°	1230	5674	5288
80°	1354	3940	3563
85°	1228	2094	1824

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 10330 cd/sqm



TEST NUMBER: P936430

CATALOG NUMBER: SQ4-FB-025U-100D-92765-1D-UNV-STD-W-12-6500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	152.5	1.3
10°-20°	675.7	5.7
20°-30°	1182.0	9.9
30°-40°	1521.5	12.8
40°-50°	1699.5	14.3
50°-60°	1627.7	13.7
60°-70°	1290.0	10.8
70°-80°	758.6	6.4
80°-90°	212.4	1.8
90°-100°	208.7	1.8
100°-110°	548.6	4.6
110°-120°	568.9	4.8
120°-130°	456.3	3.8
130°-140°	358.0	3.0
140°-150°	274.8	2.3
150°-160°	197.9	1.7
160°-170°	121.1	1.0
170°-180°	40.9	0.3
0°-30°	2010.2	16.9
0°-40°	3531.7	29.7
0°-60°	6859.0	57.7
0°-90°	9119.9	76.7
90°-120°	1326.1	11.1
90°-150°	2415.3	20.3
90°-180°	2775.0	23.3
0°-180°	11895.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1179	1179	1179	1179	1179	
5°	1148	1232	1387	1569	1626	106
15°	860	1588	2676	3244	3347	239
25°	550	1800	3187	3328	3331	253
35°	371	1721	3002	3172	3297	232
45°	254	1372	2653	3040	3176	196
55°	182	872	2251	2615	2687	166
65°	144	462	1671	1880	1906	143
75°	106	284	917	1008	1012	111
85°	38	87	227	250	254	40
90°	3	8	22	11	11	5
95°	28	108	359	185	126	31
105°	99	150	606	921	859	105
115°	176	213	486	969	1106	173
125°	244	274	442	747	881	217
135°	291	320	428	603	684	225
145°	338	359	423	514	554	211
155°	382	392	423	464	478	175
165°	412	417	423	439	445	116
175°	428	428	426	431	431	41
180°	428	428	428	428	428	



TEST NUMBER: P936430

CATALOG NUMBER: SQ4-FB-025U-100D-92765-1D-UNV-STD-W-12-6500K

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	1178.7	1178.7	1178.7	1178.7	1178.7	1178.7	1178.7	1178.7	1178.7	1178.7	1178.7
2.5°	1178.7	1178.7	1186.3	1190.1	1197.6	1201.5	1209.0	1216.6	1239.3	1243.1	1250.7
5°	1148.4	1163.5	1212.8	1231.8	1284.8	1356.8	1387.1	1436.4	1538.7	1569.0	1587.9
7.5°	1102.9	1137.0	1258.3	1288.6	1421.2	1610.7	1690.4	1796.4	1959.4	2039.0	2103.4
10°	1030.9	1102.9	1318.9	1390.9	1607.0	1895.0	2042.8	2190.6	2437.0	2546.8	2588.5
12.5°	951.3	1068.7	1383.3	1481.9	1792.7	2213.3	2391.4	2554.5	2834.9	2982.7	3005.4
15°	860.3	1019.5	1443.9	1587.9	1989.7	2478.6	2675.7	2876.6	3138.1	3244.2	3270.8
17.5°	780.7	981.6	1500.8	1652.4	2141.3	2717.4	2918.3	3085.1	3297.2	3369.2	3388.3
20°	682.1	921.0	1538.7	1735.8	2300.5	2891.7	3085.1	3213.9	3357.9	3403.4	3410.9
22.5°	610.1	856.6	1561.5	1766.1	2406.6	2997.9	3160.8	3263.2	3361.7	3376.9	3380.6
25°	549.5	784.6	1557.6	1800.2	2497.6	3062.3	3187.4	3263.2	3320.0	3327.6	3327.6
27.5°	492.7	704.9	1542.5	1807.8	2565.8	3077.4	3176.0	3229.1	3255.6	3270.8	3270.8
30°	443.4	629.2	1504.6	1792.7	2596.2	3062.3	3141.9	3168.4	3194.9	3217.7	3229.1
32.5°	405.5	557.1	1447.8	1762.4	2599.9	3024.4	3081.2	3096.4	3134.3	3187.4	3206.3
35°	371.4	485.1	1383.3	1720.7	2577.1	2963.7	3001.7	3016.8	3092.6	3172.2	3198.8
37.5°	337.3	432.1	1299.9	1648.7	2543.1	2891.7	2918.3	2944.8	3062.3	3157.1	3187.4
40°	303.2	386.6	1201.5	1569.0	2490.0	2804.6	2827.3	2869.0	3024.4	3134.3	3164.6
42.5°	276.6	348.7	1095.3	1485.6	2421.8	2706.0	2740.2	2800.8	2978.9	3096.4	3130.5
45°	254.0	310.8	981.6	1371.9	2334.6	2603.7	2653.0	2736.3	2925.9	3039.5	3069.9
47.5°	231.2	284.3	864.1	1254.5	2239.9	2501.4	2565.8	2660.5	2853.9	2963.7	2990.3
50°	212.3	257.7	746.6	1129.5	2137.6	2391.4	2467.3	2565.8	2762.9	2865.2	2899.4
52.5°	197.1	234.9	636.7	1004.4	2020.1	2277.7	2365.0	2467.3	2653.0	2751.5	2774.3
55°	182.0	216.0	542.0	871.7	1898.8	2156.5	2251.3	2349.7	2531.7	2615.1	2630.2
57.5°	174.3	200.9	462.4	746.6	1769.9	2020.1	2126.2	2217.1	2387.7	2452.1	2467.3
60°	162.9	189.5	401.7	640.5	1629.6	1891.2	1982.2	2073.1	2217.1	2270.2	2281.6
62.5°	151.6	182.0	356.3	538.1	1485.6	1739.6	1830.5	1913.9	2035.3	2073.1	2088.2
65°	144.0	174.3	322.1	462.4	1337.9	1580.4	1671.3	1743.4	1841.9	1879.8	1887.4
67.5°	136.4	166.8	295.7	398.0	1190.1	1421.2	1489.5	1557.6	1633.5	1671.3	1675.2
70°	125.1	159.2	272.9	352.5	1038.4	1239.3	1296.2	1368.2	1428.8	1447.8	1459.2
72.5°	117.5	147.8	257.7	318.3	883.0	1065.0	1118.1	1159.8	1212.8	1231.8	1231.8
75°	106.1	132.6	242.6	284.3	723.8	871.7	917.2	958.9	1000.6	1008.1	996.7
77.5°	94.8	117.5	208.5	238.8	564.7	689.8	727.7	750.4	784.6	792.1	795.9
80°	79.6	102.3	162.9	185.7	409.3	507.8	534.4	553.3	583.7	583.7	591.2
82.5°	60.6	79.6	117.5	132.6	276.6	348.7	371.4	382.8	401.7	401.7	401.7
85°	37.9	49.2	75.8	87.2	166.8	212.3	227.4	231.2	246.3	250.1	250.1
87.5°	18.9	26.5	49.2	53.1	87.2	109.9	109.9	117.5	117.5	113.7	109.9
90°	2.9	5.2	7.5	8.0	12.6	18.7	21.8	19.4	14.5	10.9	10.9
92.5°	11.5	31.0	50.6	55.5	77.9	108.0	123.0	107.8	77.4	54.6	52.4
95°	27.5	63.3	99.1	108.0	191.8	303.6	359.4	320.7	243.4	185.3	178.7
97.5°	47.7	79.3	110.8	118.7	258.4	444.7	537.9	513.4	464.5	427.8	415.3
100°	63.2	91.8	120.4	127.6	282.7	489.4	592.7	594.6	598.1	600.8	585.9
102.5°	76.4	103.1	129.8	136.4	293.7	503.4	608.2	639.4	701.7	748.4	735.6
105°	98.9	121.4	144.0	149.6	302.0	505.0	606.5	676.3	816.0	920.8	913.9
107.5°	121.8	142.9	164.0	169.2	303.5	482.5	572.0	669.4	864.3	1010.5	1012.1
110°	137.3	156.3	175.4	180.1	301.2	462.6	543.3	652.2	870.0	1033.5	1040.6



TEST NUMBER: P936430

CATALOG NUMBER: SQ4-FB-025U-100D-92765-1D-UNV-STD-W-12-6500K

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	152.6	170.7	188.8	193.3	301.3	445.2	517.2	628.7	851.6	1018.8	1029.8
115°	175.6	192.3	209.0	213.2	304.1	425.2	485.8	593.2	808.0	969.1	984.3
117.5°	198.2	213.4	228.6	232.5	309.7	412.8	464.3	561.3	755.1	900.4	917.4
120°	211.4	225.8	240.1	243.6	314.3	408.5	455.6	544.2	721.4	854.2	870.6
122.5°	224.4	238.9	253.2	256.8	320.9	406.3	449.0	528.8	688.3	807.9	824.0
125°	244.2	257.4	270.6	273.9	329.9	404.6	441.9	509.6	645.0	746.7	761.6
127.5°	260.3	273.6	286.9	290.2	338.8	403.5	435.8	494.0	610.3	697.5	710.2
130°	268.9	283.2	297.6	301.1	345.3	404.1	433.5	485.4	588.9	666.6	678.2
132.5°	277.9	292.1	306.5	310.0	350.5	404.6	431.5	477.9	570.7	640.2	650.6
135°	291.1	304.1	317.1	320.3	356.3	404.2	428.1	466.9	544.6	602.8	611.8
137.5°	304.5	317.5	330.3	333.5	364.9	406.7	427.5	460.3	525.9	575.2	582.5
140°	315.7	327.6	339.5	342.5	370.1	407.1	425.5	453.8	510.5	553.1	559.9
142.5°	324.3	335.3	346.3	349.1	374.5	408.5	425.5	450.4	500.2	537.6	543.5
145°	337.6	347.2	356.8	359.1	380.3	408.5	422.6	443.0	483.7	514.2	518.7
147.5°	350.8	360.1	369.5	371.8	388.7	411.4	422.6	438.7	470.7	494.7	498.5
150°	359.4	367.8	376.3	378.4	393.1	412.8	422.6	436.2	463.3	483.5	486.5
152.5°	368.3	374.7	381.0	382.7	396.0	413.7	422.6	434.2	457.3	474.7	476.9
155°	381.5	386.2	391.0	392.1	402.3	415.8	422.6	431.8	450.3	464.0	465.6
157.5°	391.3	395.9	400.5	401.7	408.7	418.0	422.6	429.8	444.1	454.8	455.8
160°	398.0	401.5	405.1	406.0	411.5	418.9	422.6	428.8	441.0	450.2	450.7
162.5°	404.6	407.2	409.9	410.6	414.6	420.0	422.6	427.8	438.1	445.9	446.4
165°	411.7	414.1	416.6	417.2	419.0	421.4	422.6	426.4	433.7	439.3	439.8
167.5°	418.3	419.5	420.6	420.9	422.4	424.5	425.5	427.9	432.8	436.4	436.7
170°	422.6	423.8	424.9	425.2	425.3	425.4	425.5	427.9	432.8	436.4	436.4
172.5°	424.9	425.2	425.4	425.5	425.5	425.5	425.5	427.4	431.2	434.1	433.9
175°	428.1	428.1	428.1	428.1	427.2	426.1	425.5	426.7	429.1	431.0	431.0
177.5°	428.1	428.1	428.1	428.1	427.4	426.6	426.1	427.0	428.9	430.4	430.1
180°	428.1	428.1	428.1	428.1	428.1	428.1	428.1	428.1	428.1	428.1	428.1



TEST NUMBER: P936430

CATALOG NUMBER: SQ4-FB-025U-100D-92765-1D-UNV-STD-W-12-6500K

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	1178.7	1178.7
2.5°	1258.3	1250.7
5°	1618.4	1625.9
7.5°	2179.3	2175.4
10°	2709.9	2743.9
12.5°	3096.4	3104.0
15°	3331.4	3346.6
17.5°	3422.3	3426.1
20°	3426.1	3418.6
22.5°	3384.4	3376.9
25°	3335.2	3331.4
27.5°	3289.7	3293.5
30°	3270.8	3282.1
32.5°	3270.8	3289.7
35°	3278.3	3297.2
37.5°	3274.5	3297.2
40°	3259.4	3285.9
42.5°	3217.7	3236.6
45°	3153.2	3176.0
47.5°	3069.9	3085.1
50°	2963.7	2978.9
52.5°	2831.1	2834.9
55°	2671.9	2687.1
57.5°	2501.4	2505.1
60°	2311.9	2323.3
62.5°	2111.0	2111.0
65°	1898.8	1906.4
67.5°	1679.0	1697.9
70°	1455.3	1459.2
72.5°	1235.5	1235.5
75°	1008.1	1011.9
77.5°	792.1	792.1
80°	587.5	591.2
82.5°	405.5	413.1
85°	254.0	254.0
87.5°	117.5	106.1
90°	10.9	10.9
92.5°	43.8	35.1
95°	152.4	126.1
97.5°	365.3	315.2
100°	526.3	466.6
102.5°	684.5	633.5
105°	886.5	859.0
107.5°	1018.8	1025.4
110°	1069.2	1097.8



TEST NUMBER: P936430

CATALOG NUMBER: SQ4-FB-025U-100D-92765-1D-UNV-STD-W-12-6500K

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	1073.7	1117.6
115°	1045.2	1106.1
117.5°	984.9	1052.4
120°	936.2	1001.8
122.5°	888.9	953.6
125°	821.2	880.8
127.5°	760.5	810.8
130°	724.7	771.2
132.5°	692.2	733.8
135°	647.6	683.5
137.5°	611.9	641.3
140°	587.4	614.8
142.5°	567.1	590.7
145°	536.6	554.5
147.5°	513.3	528.1
150°	498.6	510.5
152.5°	485.9	495.0
155°	471.5	477.5
157.5°	460.1	464.3
160°	453.2	455.6
162.5°	448.7	451.0
165°	442.3	444.7
167.5°	437.6	438.7
170°	436.4	436.4
172.5°	433.0	432.1
175°	431.0	431.0
177.5°	429.1	428.1
180°	428.1	428.1



TEST NUMBER: P936430
 CATALOG NUMBER: SQ4-FB-025U-100D-92765-1D-UNV-STD-W-12-6500K

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.64	8.87	8.32	9.57	10.40	20.83	22.06	21.51	22.77	23.59
	3H	8.37	9.48	9.06	10.20	11.06	22.70	23.81	23.39	24.53	25.39
	4H	8.68	9.74	9.39	10.46	11.33	23.36	24.42	24.08	25.14	26.02
	6H	8.95	9.93	9.68	10.66	11.55	23.82	24.79	24.54	25.53	26.42
	8H	9.03	9.96	9.77	10.72	11.61	23.95	24.88	24.69	25.64	26.53
	12H	9.06	9.95	9.80	10.70	11.62	24.04	24.93	24.78	25.67	26.59
4H	2H	14.90	15.96	15.62	16.68	17.55	21.14	22.20	21.86	22.92	23.80
	3H	16.50	17.39	17.23	18.15	19.04	23.23	24.11	23.96	24.88	25.77
	4H	16.61	17.42	17.36	18.18	19.10	24.01	24.82	24.76	25.58	26.50
	6H	16.65	17.35	17.41	18.14	19.06	24.58	25.28	25.34	26.07	27.00
	8H	16.63	17.29	17.40	18.07	19.01	24.76	25.41	25.52	26.20	27.14
	12H	16.61	17.20	17.40	18.01	18.95	24.87	25.46	25.66	26.27	27.22
8H	4H	18.09	18.75	18.86	19.53	20.48	24.11	24.76	24.87	25.55	26.49
	6H	18.35	18.90	19.15	19.73	20.67	24.76	25.30	25.56	26.13	27.07
	8H	18.38	18.86	19.19	19.69	20.65	24.99	25.47	25.80	26.30	27.26
	12H	18.36	18.79	19.18	19.61	20.62	25.15	25.58	25.97	26.40	27.41
12H	4H	18.26	18.85	19.05	19.66	20.60	24.08	24.67	24.87	25.48	26.42
	6H	18.62	19.11	19.43	19.93	20.89	24.75	25.23	25.56	26.06	27.02
	8H	18.71	19.14	19.52	19.95	20.97	25.00	25.43	25.81	26.24	27.26