

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P936648

Luminaire Tested: SQ4-FB-050U-050D-92765-1D-UNV-STD-W-8-6500K

Issue Date: 12/17/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P936648  
REPORT IS A COMBINATION OF REPORTS P933485 AND P933786  
Test Lab: INNOVATION CENTER  
Issue Date: 12/17/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ4-FB-050U-050D-92765-1D-UNV-STD-W-8-6500K  
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6895.1 lumens  
Efficiency: N/A  
Efficacy: 121.4 lumens/watt  
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33  
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 8' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 56.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P936648  
CATALOG NUMBER: SQ4-FB-050U-050D-92765-1D-UNV-STD-W-8-6500K

### Luminous Intensity Polar Plot

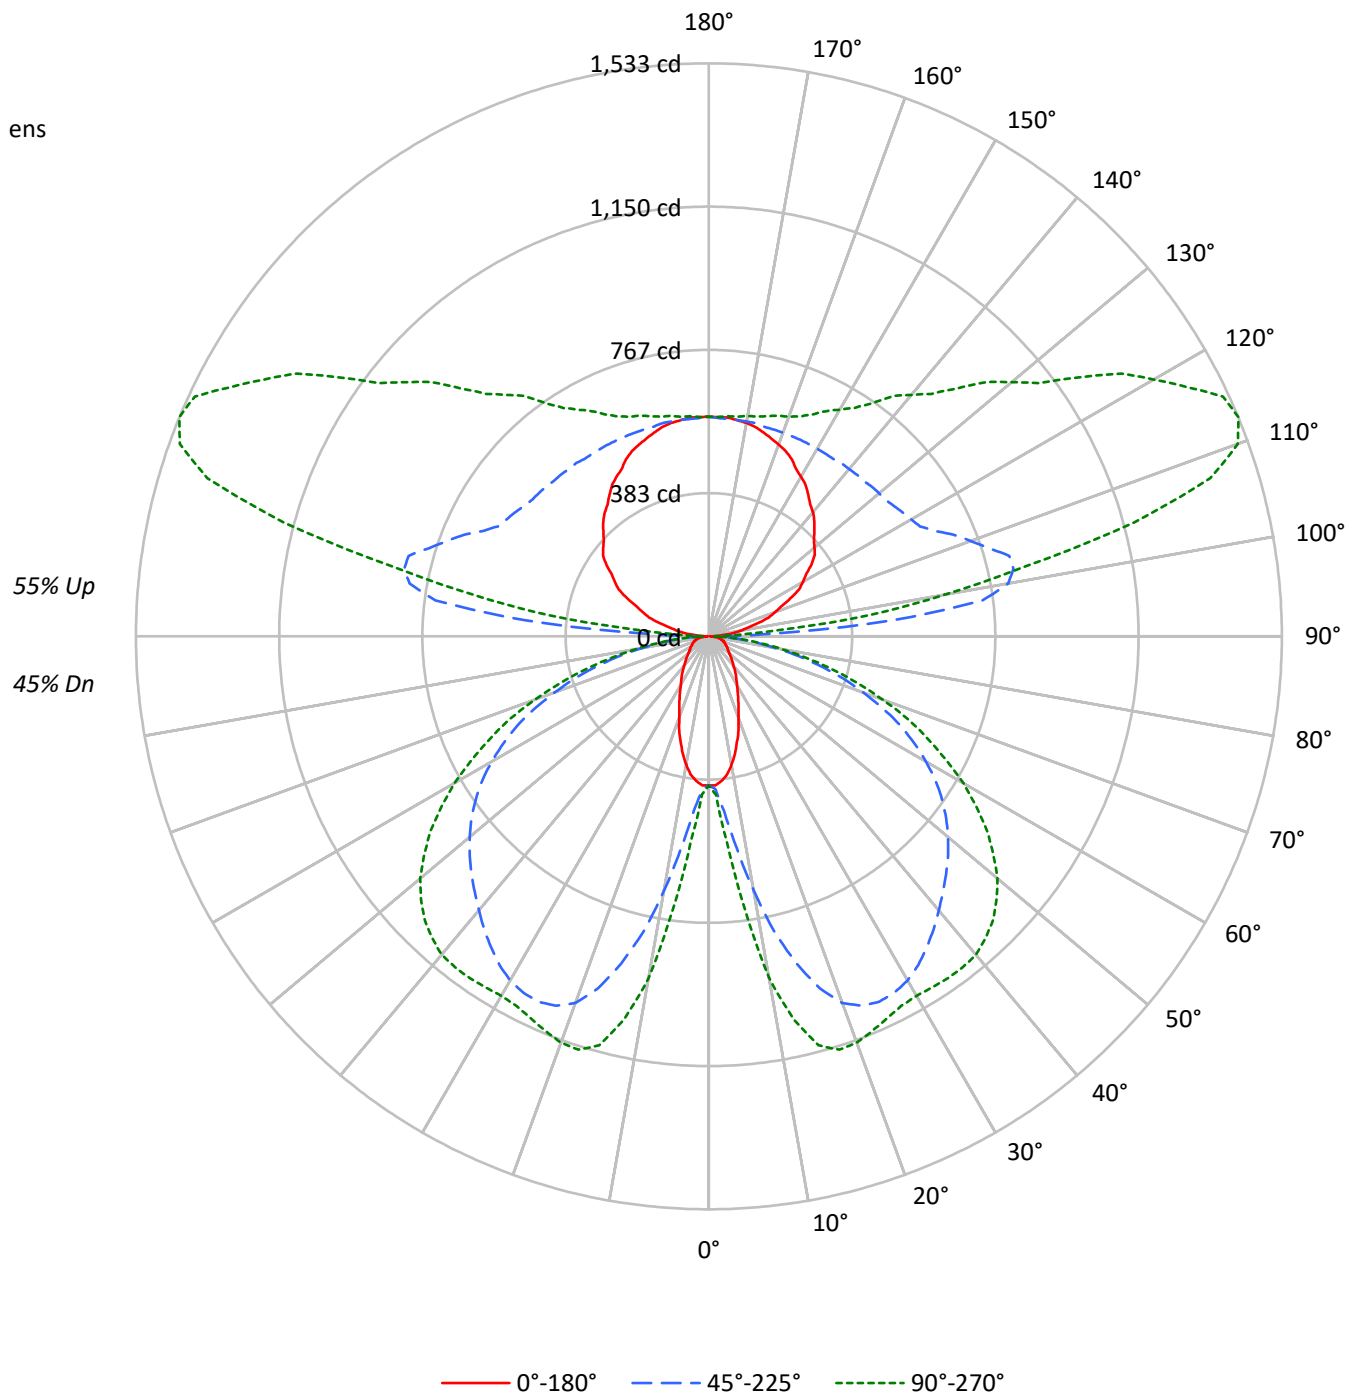



TEST NUMBER: P936648

CATALOG NUMBER: SQ4-FB-050U-050D-92765-1D-UNV-STD-W-8-6500K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	51	51	51	45
1	96	92	88	84	88	84	81	77	70	67	65	57	55	53	45	43	42	37
2	87	79	73	68	79	73	67	63	60	56	53	49	46	44	39	37	35	30
3	79	69	62	56	72	64	57	52	53	48	44	43	39	36	34	31	29	25
4	72	61	53	47	66	56	49	43	47	41	37	38	34	31	30	27	24	21
5	66	54	46	39	60	50	42	37	41	36	31	34	29	26	26	23	21	18
6	60	48	40	34	55	44	37	31	37	31	27	30	26	22	24	21	18	15
7	56	43	35	29	51	40	32	27	33	28	23	27	23	20	21	18	16	13
8	51	39	31	26	47	36	29	24	30	25	21	25	20	17	20	16	14	12
9	48	35	28	23	44	33	26	21	27	22	18	23	18	15	18	15	12	10
10	45	32	25	20	41	30	23	19	25	20	16	21	17	14	17	13	11	9

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1850	1850	1850
5°	1808	2139	2487
10°	1640	3118	4124
15°	1394	4074	4980
20°	1134	4721	5075
25°	947	4940	4972
30°	798	4971	4962
35°	705	4889	5091
40°	615	4781	5224
45°	557	4703	5244
50°	511	4632	5157
55°	490	4528	4928
60°	501	4330	4567
65°	522	4027	4071
70°	556	3512	3440
75°	617	2864	2684
80°	674	1986	1808
85°	596	1054	926

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 45°  
 Luminance: 5244 cd/sqm



TEST NUMBER: P936648

CATALOG NUMBER: SQ4-FB-050U-050D-92765-1D-UNV-STD-W-8-6500K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	51.6	0.7
10°-20°	228.7	3.3
20°-30°	400.0	5.8
30°-40°	514.9	7.5
40°-50°	575.1	8.3
50°-60°	550.8	8.0
60°-70°	436.5	6.3
70°-80°	256.7	3.7
80°-90°	73.6	1.1
90°-100°	286.3	4.2
100°-110°	752.6	10.9
110°-120°	780.4	11.3
120°-130°	626.0	9.1
130°-140°	491.2	7.1
140°-150°	377.0	5.5
150°-160°	271.5	3.9
160°-170°	166.1	2.4
170°-180°	56.1	0.8
0°-30°	680.2	9.9
0°-40°	1195.1	17.3
0°-60°	2321.1	33.7
0°-90°	3087.9	44.8
90°-120°	1819.3	26.4
90°-150°	3313.5	48.1
90°-180°	3807.0	55.2
0°-180°	6895.1	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	399	399	399	399	399	
5°	389	417	469	531	550	36
15°	291	537	906	1098	1132	81
25°	186	609	1079	1126	1127	86
35°	126	582	1016	1074	1116	78
45°	86	464	898	1029	1075	66
55°	62	295	762	885	909	56
65°	49	156	566	636	645	48
75°	36	96	310	341	342	38
85°	13	30	77	85	86	14
90°	4	11	30	15	15	4
95°	38	148	493	254	173	42
105°	136	205	832	1263	1178	144
115°	241	292	667	1330	1518	238
125°	335	376	606	1024	1208	297
135°	399	440	587	827	938	309
145°	463	493	580	706	761	290
155°	523	538	580	636	655	240
165°	565	572	580	603	610	159
175°	587	587	584	591	591	56
180°	587	587	587	587	587	



TEST NUMBER: P936648

CATALOG NUMBER: SQ4-FB-050U-050D-92765-1D-UNV-STD-W-8-6500K

**CANDELA DISTRIBUTION (FULL):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	398.8	398.8	398.8	398.8	398.8	398.8	398.8	398.8	398.8	398.8	398.8
2.5°	398.8	398.8	401.4	402.7	405.2	406.6	409.2	411.7	419.4	420.6	423.2
5°	388.6	393.8	410.4	416.8	434.8	459.2	469.4	486.0	520.7	531.0	537.4
7.5°	373.2	384.8	425.8	436.0	481.0	545.0	572.0	607.9	663.0	690.0	711.8
10°	348.8	373.2	446.4	470.7	543.8	641.2	691.3	741.3	824.6	861.8	876.0
12.5°	322.0	361.6	468.2	501.4	606.6	749.0	809.3	864.4	959.3	1009.4	1017.0
15°	291.2	345.0	488.6	537.4	673.4	838.8	905.5	973.4	1061.9	1097.8	1106.8
17.5°	264.2	332.2	507.9	559.2	724.6	919.6	987.6	1044.0	1115.8	1140.2	1146.6
20°	230.8	311.6	520.7	587.4	778.5	978.6	1044.0	1087.6	1136.3	1151.7	1154.3
22.5°	206.4	289.8	528.4	597.6	814.4	1014.5	1069.6	1104.3	1137.6	1142.7	1144.0
25°	186.0	265.4	527.1	609.2	845.2	1036.3	1078.6	1104.3	1123.5	1126.1	1126.1
27.5°	166.8	238.6	522.0	611.8	868.3	1041.4	1074.8	1092.7	1101.7	1106.8	1106.8
30°	150.0	212.9	509.2	606.6	878.6	1036.3	1063.2	1072.2	1081.2	1088.9	1092.7
32.5°	137.2	188.6	490.0	596.4	879.8	1023.4	1042.7	1047.8	1060.6	1078.6	1085.0
35°	125.6	164.2	468.2	582.2	872.1	1003.0	1015.8	1020.9	1046.6	1073.5	1082.4
37.5°	114.2	146.2	439.9	557.9	860.6	978.6	987.6	996.5	1036.3	1068.4	1078.6
40°	102.6	130.8	406.6	531.0	842.6	949.1	956.8	970.9	1023.4	1060.6	1070.9
42.5°	93.6	118.0	370.6	502.8	819.6	915.7	927.3	947.8	1008.1	1047.8	1059.4
45°	86.0	105.2	332.2	464.2	790.0	881.1	897.8	926.0	990.1	1028.6	1038.8
47.5°	78.2	96.2	292.4	424.5	758.0	846.5	868.3	900.4	965.8	1003.0	1011.9
50°	71.8	87.2	252.6	382.2	723.4	809.3	834.9	868.3	935.0	969.6	981.1
52.5°	66.6	79.6	215.4	339.8	683.6	770.8	800.3	834.9	897.8	931.1	938.8
55°	61.6	73.1	183.4	295.0	642.6	729.8	761.8	795.2	856.7	885.0	890.1
57.5°	59.0	68.0	156.4	252.6	599.0	683.6	719.5	750.3	808.0	829.8	834.9
60°	55.2	64.2	136.0	216.8	551.5	640.0	670.8	701.6	750.3	768.2	772.1
62.5°	51.3	61.6	120.6	182.2	502.8	588.7	619.4	647.7	688.7	701.6	706.7
65°	48.8	59.0	109.0	156.4	452.8	534.8	565.6	590.0	623.3	636.2	638.7
67.5°	46.2	56.4	100.0	134.6	402.7	481.0	504.0	527.1	552.8	565.6	566.8
70°	42.4	53.8	92.4	119.2	351.4	419.4	438.6	463.0	483.5	490.0	493.8
72.5°	39.8	50.0	87.2	107.8	298.8	360.4	378.4	392.4	410.4	416.8	416.8
75°	36.0	44.8	82.0	96.2	245.0	295.0	310.4	324.4	338.6	341.2	337.3
77.5°	32.0	39.8	70.6	80.8	191.1	233.4	246.2	254.0	265.4	268.0	269.4
80°	27.0	34.6	55.2	62.8	138.6	171.8	180.8	187.2	197.5	197.5	200.0
82.5°	20.6	27.0	39.8	44.8	93.6	118.0	125.6	129.6	136.0	136.0	136.0
85°	12.8	16.6	25.6	29.5	56.4	71.8	77.0	78.2	83.4	84.6	84.6
87.5°	6.4	9.0	16.6	18.0	29.5	37.2	37.2	39.8	39.8	38.4	37.2
90°	3.9	7.1	10.2	11.0	17.3	25.7	29.9	26.6	20.0	15.0	15.0
92.5°	15.8	42.6	69.4	76.1	107.0	148.1	168.7	147.8	106.1	74.9	71.9
95°	37.9	86.9	136.0	148.2	263.1	416.4	493.1	440.0	333.9	254.3	245.3
97.5°	65.4	108.6	151.9	162.7	354.5	610.1	737.9	704.3	637.2	586.9	569.7
100°	86.7	125.9	165.1	175.0	387.7	671.3	813.1	815.6	820.5	824.1	803.7
102.5°	104.9	141.5	178.0	187.2	402.9	690.7	834.5	877.2	962.7	1026.8	1009.3
105°	135.6	166.6	197.6	205.4	414.3	692.9	832.1	927.9	1119.6	1263.3	1253.9
107.5°	167.1	196.0	224.9	232.2	416.3	662.0	784.7	918.4	1185.8	1386.3	1388.6
110°	188.4	214.5	240.7	247.2	413.3	634.6	745.4	894.8	1193.6	1417.7	1427.6



TEST NUMBER: P936648

CATALOG NUMBER: SQ4-FB-050U-050D-92765-1D-UNV-STD-W-8-6500K

**CANDELA DISTRIBUTION (continued):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	209.3	234.2	259.0	265.2	413.4	610.8	709.5	862.4	1168.3	1397.7	1412.8
115°	240.9	263.8	286.8	292.5	417.2	583.5	666.6	813.9	1108.5	1329.5	1350.3
117.5°	271.9	292.8	313.6	318.9	424.9	566.3	636.9	769.9	1035.8	1235.3	1258.4
120°	290.1	309.7	329.4	334.3	431.2	560.5	625.2	746.6	989.6	1171.8	1194.3
122.5°	307.8	327.6	347.4	352.4	440.2	557.5	616.1	725.5	944.3	1108.4	1130.6
125°	335.1	353.0	371.1	375.6	452.5	555.0	606.2	699.2	885.1	1024.5	1044.9
127.5°	357.1	375.3	393.5	398.1	464.7	553.5	597.9	677.7	837.3	957.1	974.3
130°	368.9	388.5	408.2	413.1	473.6	554.4	594.8	665.8	807.9	914.4	930.4
132.5°	381.1	400.7	420.4	425.3	480.9	555.0	592.1	655.7	782.8	878.2	892.4
135°	399.3	417.2	435.0	439.5	488.7	554.4	587.3	640.6	747.1	826.9	839.3
137.5°	417.9	435.5	453.2	457.6	500.6	557.8	586.5	631.6	721.6	789.1	799.2
140°	433.2	449.5	465.8	469.9	507.8	558.4	583.8	622.7	700.4	758.7	768.1
142.5°	445.0	460.0	475.1	478.9	513.9	560.4	583.8	617.9	686.3	737.5	745.6
145°	463.2	476.3	489.5	492.7	521.8	560.5	579.8	607.8	663.7	705.6	711.7
147.5°	481.3	494.1	506.9	510.0	533.3	564.3	579.8	601.8	645.7	678.7	683.8
150°	493.1	504.7	516.2	519.1	539.4	566.4	579.8	598.4	635.6	663.4	667.5
152.5°	505.3	514.1	522.8	525.0	543.3	567.7	579.8	595.7	627.4	651.2	654.3
155°	523.4	529.9	536.4	538.0	552.0	570.6	579.8	592.5	617.6	636.5	638.6
157.5°	536.8	543.1	549.4	551.1	560.6	573.4	579.8	589.6	609.2	623.9	625.4
160°	545.9	550.9	555.7	557.0	564.6	574.8	579.8	588.2	605.0	617.6	618.5
162.5°	555.0	558.7	562.3	563.3	568.8	576.2	579.8	586.9	601.2	611.8	612.5
165°	564.8	568.2	571.4	572.3	574.8	578.1	579.8	584.9	595.0	602.7	603.5
167.5°	573.9	575.4	577.1	577.4	579.5	582.3	583.8	587.1	593.8	598.8	599.2
170°	579.8	581.4	583.0	583.4	583.5	583.7	583.8	587.1	593.8	598.8	598.8
172.5°	583.0	583.4	583.7	583.8	583.8	583.8	583.8	586.4	591.7	595.6	595.3
175°	587.3	587.3	587.3	587.3	586.1	584.5	583.8	585.4	588.7	591.2	591.2
177.5°	587.3	587.3	587.3	587.3	586.3	585.1	584.5	585.9	588.4	590.4	590.1
180°	587.3	587.3	587.3	587.3	587.3	587.3	587.3	587.3	587.3	587.3	587.3



TEST NUMBER: P936648

CATALOG NUMBER: SQ4-FB-050U-050D-92765-1D-UNV-STD-W-8-6500K

**CANDELA DISTRIBUTION (continued):**

	80°	90°
0°	398.8	398.8
2.5°	425.8	423.2
5°	547.6	550.2
7.5°	737.4	736.2
10°	917.0	928.6
12.5°	1047.8	1050.4
15°	1127.4	1132.5
17.5°	1158.1	1159.4
20°	1159.4	1156.8
22.5°	1145.3	1142.7
25°	1128.6	1127.4
27.5°	1113.2	1114.5
30°	1106.8	1110.7
32.5°	1106.8	1113.2
35°	1109.4	1115.8
37.5°	1108.1	1115.8
40°	1103.0	1112.0
42.5°	1088.9	1095.3
45°	1067.1	1074.8
47.5°	1038.8	1044.0
50°	1003.0	1008.1
52.5°	958.0	959.3
55°	904.2	909.3
57.5°	846.5	847.8
60°	782.4	786.2
62.5°	714.4	714.4
65°	642.6	645.1
67.5°	568.2	574.6
70°	492.5	493.8
72.5°	418.1	418.1
75°	341.2	342.4
77.5°	268.0	268.0
80°	198.8	200.0
82.5°	137.2	139.8
85°	86.0	86.0
87.5°	39.8	36.0
90°	15.0	15.0
92.5°	60.0	48.1
95°	209.1	173.1
97.5°	501.0	432.4
100°	721.9	640.1
102.5°	939.2	869.1
105°	1216.2	1178.5
107.5°	1397.7	1406.8
110°	1466.8	1506.1





TEST NUMBER: P936648

CATALOG NUMBER: SQ4-FB-050U-050D-92765-1D-UNV-STD-W-8-6500K

**CANDELA DISTRIBUTION (continued):**

	80°	90°
112.5°	1473.0	1533.3
115°	1433.9	1517.5
117.5°	1351.2	1443.9
120°	1284.4	1374.4
122.5°	1219.4	1308.3
125°	1126.7	1208.5
127.5°	1043.3	1112.3
130°	994.2	1057.9
132.5°	949.6	1006.7
135°	888.5	937.7
137.5°	839.5	879.8
140°	805.8	843.5
142.5°	778.0	810.4
145°	736.3	760.7
147.5°	704.1	724.5
150°	684.0	700.4
152.5°	666.8	679.2
155°	646.9	655.1
157.5°	631.2	636.9
160°	621.8	625.2
162.5°	615.7	618.8
165°	606.8	610.1
167.5°	600.5	601.9
170°	598.8	598.8
172.5°	594.1	592.8
175°	591.2	591.2
177.5°	588.7	587.3
180°	587.3	587.3



TEST NUMBER: P936648  
 CATALOG NUMBER: SQ4-FB-050U-050D-92765-1D-UNV-STD-W-8-6500K

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	2.65	3.50	3.64	4.51	5.85	15.83	16.68	16.82	17.69	19.03
	3H	3.35	4.11	4.35	5.13	6.49	17.67	18.43	18.67	19.45	20.81
	4H	3.65	4.37	4.66	5.39	6.76	18.31	19.03	19.33	20.06	21.42
	6H	3.90	4.56	4.92	5.59	6.97	18.74	19.41	19.77	20.43	21.82
	8H	3.97	4.60	5.00	5.64	7.02	18.86	19.50	19.89	20.54	21.92
	12H	3.98	4.59	5.02	5.63	7.03	18.93	19.53	19.97	20.57	21.97
4H	2H	9.86	10.59	10.88	11.61	12.98	16.10	16.82	17.12	17.85	19.21
	3H	11.43	12.03	12.46	13.08	14.47	18.14	18.75	19.18	19.80	21.18
	4H	11.52	12.08	12.56	13.12	14.52	18.91	19.47	19.95	20.51	21.91
	6H	11.53	12.01	12.58	13.08	14.48	19.45	19.93	20.50	20.99	22.39
	8H	11.51	11.96	12.56	13.01	14.43	19.61	20.06	20.66	21.12	22.53
	12H	11.46	11.87	12.53	12.94	14.36	19.70	20.11	20.77	21.18	22.60
8H	4H	12.97	13.41	14.02	14.47	15.89	18.97	19.42	20.02	20.48	21.89
	6H	13.21	13.58	14.28	14.68	16.09	19.60	19.97	20.67	21.07	22.48
	8H	13.23	13.55	14.31	14.64	16.07	19.82	20.14	20.90	21.23	22.66
	12H	13.19	13.48	14.28	14.56	16.03	19.96	20.25	21.05	21.33	22.80
12H	4H	13.11	13.51	14.18	14.59	16.01	18.92	19.33	19.99	20.40	21.82
	6H	13.47	13.79	14.55	14.88	16.31	19.58	19.91	20.66	20.99	22.42
	8H	13.54	13.82	14.62	14.90	16.37	19.81	20.10	20.90	21.18	22.65