

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P936745

Luminaire Tested: SQ4-FB-050U-075D-92765-1D-UNV-STD-W-8-3500K

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P936745
REPORT IS A COMBINATION OF REPORTS P933486 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-050U-075D-92765-1D-UNV-STD-W-8-3500K
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7851.5 lumens
Efficiency: N/A
Efficacy: 107.9 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 8' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 72.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P936745
CATALOG NUMBER: SQ4-FB-050U-075D-92765-1D-UNV-STD-W-8-3500K

Luminous Intensity Polar Plot

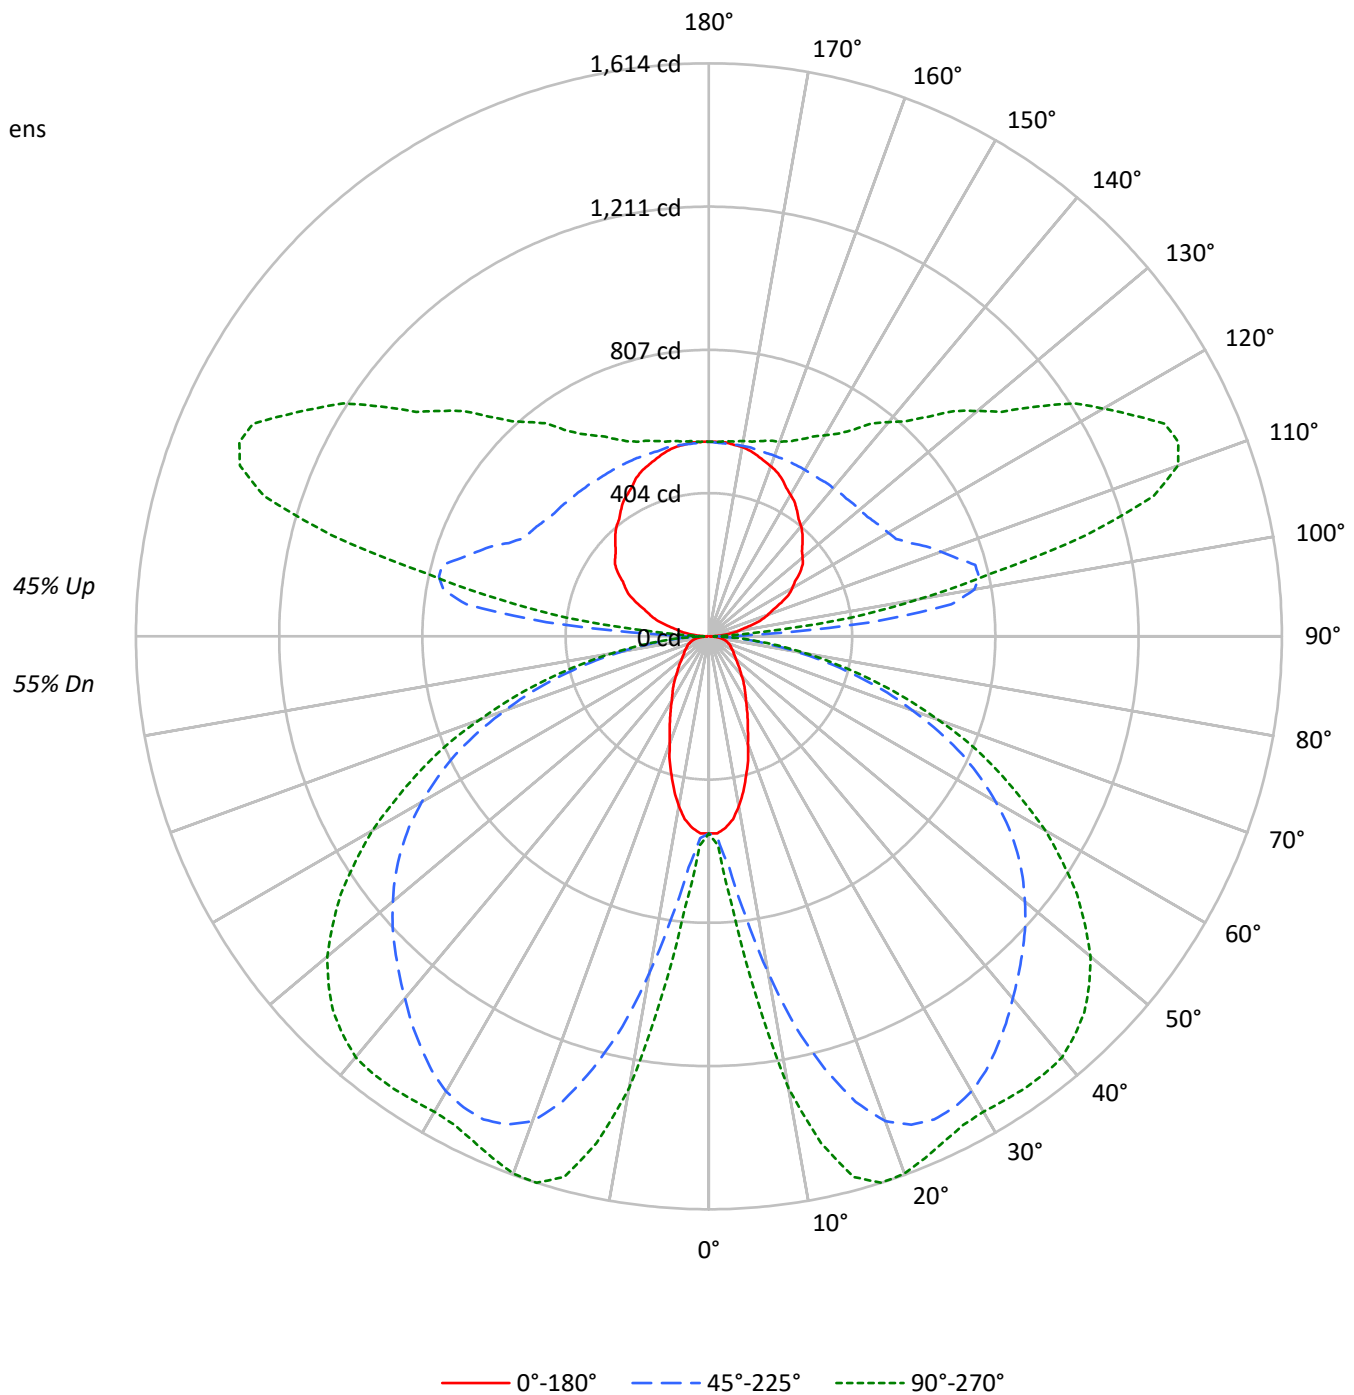



TEST NUMBER: P936745

CATALOG NUMBER: SQ4-FB-050U-075D-92765-1D-UNV-STD-W-8-3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	108	108	108	108	100	100	100	100	86	86	86	73	73	73	60	60	60	55		
1	98	94	89	86	91	87	83	80	75	72	69	63	61	59	53	51	50	45		
2	89	81	74	69	82	75	70	65	65	60	56	55	51	49	45	43	41	37		
3	81	71	63	57	74	66	59	53	56	51	47	48	44	40	40	37	34	30		
4	73	62	54	47	68	58	50	45	50	44	39	42	38	34	35	32	29	25		
5	67	55	46	40	62	51	44	38	44	38	33	37	33	29	31	28	25	21		
6	62	49	40	34	57	46	38	32	39	33	29	33	29	25	28	24	21	18		
7	57	44	36	30	52	41	34	28	35	29	25	30	25	22	25	22	19	16		
8	53	40	32	26	49	37	30	25	32	26	22	27	23	19	23	19	16	14		
9	49	36	28	23	45	34	27	22	29	23	19	25	20	17	21	17	15	12		
10	46	33	25	20	42	31	24	19	27	21	17	23	18	15	19	16	13	11		

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2576	2576	2576
5°	2516	2977	3463
10°	2283	4340	5741
15°	1940	5671	6932
20°	1579	6571	7065
25°	1318	6876	6921
30°	1111	6920	6908
35°	983	6805	7086
40°	856	6656	7271
45°	775	6546	7299
50°	711	6448	7179
55°	681	6304	6860
60°	698	6027	6358
65°	725	5606	5667
70°	772	4889	4788
75°	856	3986	3737
80°	936	2764	2518
85°	834	1466	1288

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 7299 cd/sqm



TEST NUMBER: P936745

CATALOG NUMBER: SQ4-FB-050U-075D-92765-1D-UNV-STD-W-8-3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	71.8	0.9
10°-20°	318.3	4.1
20°-30°	556.8	7.1
30°-40°	716.8	9.1
40°-50°	800.6	10.2
50°-60°	766.8	9.8
60°-70°	607.6	7.7
70°-80°	357.3	4.6
80°-90°	101.4	1.3
90°-100°	267.2	3.4
100°-110°	702.6	8.9
110°-120°	728.5	9.3
120°-130°	584.4	7.4
130°-140°	458.5	5.8
140°-150°	351.9	4.5
150°-160°	253.5	3.2
160°-170°	155.1	2.0
170°-180°	52.4	0.7
0°-30°	946.9	12.1
0°-40°	1663.7	21.2
0°-60°	3231.1	41.2
0°-90°	4297.4	54.7
90°-120°	1698.4	21.6
90°-150°	3093.2	39.4
90°-180°	3554.0	45.3
0°-180°	7851.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	555	555	555	555	555	
5°	541	580	653	739	766	50
15°	405	748	1260	1528	1576	113
25°	259	848	1502	1568	1569	119
35°	175	810	1414	1494	1553	109
45°	120	646	1250	1432	1496	93
55°	86	411	1060	1232	1266	78
65°	68	218	787	886	898	67
75°	50	134	432	475	477	52
85°	18	41	107	118	120	19
90°	4	10	28	14	14	4
95°	35	138	460	237	162	39
105°	127	192	777	1179	1100	134
115°	225	273	622	1241	1417	222
125°	313	351	566	956	1128	278
135°	373	410	548	772	875	288
145°	432	460	541	659	710	271
155°	489	502	541	594	612	225
165°	527	534	541	563	570	149
175°	548	548	545	552	552	52
180°	548	548	548	548	548	



TEST NUMBER: P936745

CATALOG NUMBER: SQ4-FB-050U-075D-92765-1D-UNV-STD-W-8-3500K

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	555.2	555.2	555.2	555.2	555.2	555.2	555.2	555.2	555.2	555.2	555.2
2.5°	555.2	555.2	558.8	560.6	564.1	565.9	569.5	573.1	583.8	585.6	589.1
5°	540.9	548.1	571.3	580.2	605.2	639.1	653.4	676.6	724.8	739.1	748.0
7.5°	519.5	535.6	592.7	607.0	669.5	758.7	796.2	846.2	923.0	960.5	990.8
10°	485.6	519.5	621.3	655.2	756.9	892.6	962.2	1032.0	1148.0	1199.8	1219.4
12.5°	448.1	503.4	651.6	698.0	844.4	1042.7	1126.6	1203.3	1335.4	1405.1	1415.8
15°	405.2	480.2	680.2	748.0	937.3	1167.6	1260.5	1355.1	1478.3	1528.3	1540.8
17.5°	367.8	462.4	707.0	778.4	1008.7	1280.1	1374.7	1453.3	1553.2	1587.2	1596.1
20°	321.3	433.8	724.8	817.6	1083.7	1362.2	1453.3	1514.0	1581.8	1603.2	1606.8
22.5°	287.4	403.5	735.5	831.9	1133.7	1412.2	1489.0	1537.2	1583.6	1590.7	1592.5
25°	258.9	369.5	733.7	848.0	1176.6	1442.6	1501.5	1537.2	1564.0	1567.5	1567.5
27.5°	232.1	332.1	726.6	851.6	1208.7	1449.7	1496.1	1521.1	1533.6	1540.8	1540.8
30°	208.9	296.3	708.7	844.4	1223.0	1442.6	1480.1	1492.5	1505.0	1515.8	1521.1
32.5°	191.0	262.4	682.0	830.1	1224.8	1424.7	1451.5	1458.6	1476.5	1501.5	1510.4
35°	175.0	228.5	651.6	810.5	1214.1	1396.1	1414.0	1421.1	1456.8	1494.3	1506.8
37.5°	158.9	203.5	612.3	776.6	1198.0	1362.2	1374.7	1387.2	1442.6	1487.2	1501.5
40°	142.8	182.1	565.9	739.1	1173.0	1321.2	1331.9	1351.5	1424.7	1476.5	1490.8
42.5°	130.3	164.2	515.9	699.8	1140.9	1274.8	1290.8	1319.4	1403.3	1458.6	1474.7
45°	119.6	146.4	462.4	646.3	1099.8	1226.5	1249.8	1289.0	1378.3	1431.9	1446.1
47.5°	108.9	133.9	407.0	590.9	1055.2	1178.3	1208.7	1253.3	1344.4	1396.1	1408.6
50°	100.0	121.4	351.7	532.0	1006.9	1126.6	1162.3	1208.7	1301.5	1349.7	1365.8
52.5°	92.8	110.7	299.9	473.1	951.5	1073.0	1114.1	1162.3	1249.8	1296.2	1306.9
55°	85.7	101.8	255.3	410.6	894.4	1015.9	1060.5	1106.9	1192.6	1231.9	1239.0
57.5°	82.1	94.6	217.8	351.7	833.7	951.5	1001.5	1044.5	1124.8	1155.1	1162.3
60°	76.8	89.3	189.2	301.7	767.7	890.8	933.7	976.5	1044.5	1069.4	1074.8
62.5°	71.4	85.7	167.8	253.5	699.8	819.4	862.3	901.5	958.7	976.5	983.7
65°	67.8	82.1	151.7	217.8	630.2	744.4	787.3	821.2	867.6	885.5	889.0
67.5°	64.3	78.6	139.2	187.5	560.6	669.5	701.6	733.7	769.4	787.3	789.1
70°	58.9	75.0	128.5	166.0	489.2	583.8	610.6	644.5	673.0	682.0	687.3
72.5°	55.3	69.6	121.4	150.0	416.0	501.7	526.6	546.3	571.3	580.2	580.2
75°	50.0	62.5	114.3	133.9	341.0	410.6	432.0	451.7	471.3	474.9	469.5
77.5°	44.6	55.3	98.2	112.5	266.0	324.9	342.8	353.5	369.5	373.1	374.9
80°	37.5	48.2	76.8	87.5	192.8	239.2	251.7	260.6	274.9	274.9	278.5
82.5°	28.6	37.5	55.3	62.5	130.3	164.2	175.0	180.3	189.2	189.2	189.2
85°	17.9	23.2	35.7	41.1	78.6	100.0	107.1	108.9	116.0	117.8	117.8
87.5°	8.9	12.5	23.2	25.0	41.1	51.8	51.8	55.3	55.3	53.6	51.8
90°	3.7	6.6	9.6	10.3	16.2	24.0	27.9	24.8	18.7	14.0	14.0
92.5°	14.7	39.7	64.8	71.1	99.9	138.3	157.5	138.0	99.1	69.9	67.1
95°	35.3	81.1	126.9	138.4	245.6	388.7	460.3	410.8	311.7	237.3	229.0
97.5°	61.1	101.4	141.8	151.9	330.9	569.5	688.8	657.5	594.8	547.9	531.8
100°	81.0	117.6	154.2	163.3	362.0	626.7	759.1	761.4	766.0	769.3	750.2
102.5°	97.9	132.1	166.2	174.8	376.2	644.7	779.0	818.9	898.7	958.5	942.2
105°	126.6	155.5	184.5	191.7	386.8	646.8	776.8	866.2	1045.2	1179.3	1170.5
107.5°	156.0	183.0	209.9	216.7	388.6	618.0	732.6	857.4	1106.9	1294.1	1296.3
110°	175.8	200.2	224.7	230.7	385.8	592.4	695.8	835.3	1114.3	1323.5	1332.7



TEST NUMBER: P936745

CATALOG NUMBER: SQ4-FB-050U-075D-92765-1D-UNV-STD-W-8-3500K

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	195.4	218.6	241.8	247.6	385.9	570.2	662.3	805.1	1090.6	1304.7	1318.8
115°	224.9	246.3	267.7	273.1	389.5	544.7	622.2	759.8	1034.8	1241.1	1260.6
117.5°	253.9	273.3	292.8	297.7	396.7	528.6	594.6	718.7	967.0	1153.2	1174.8
120°	270.8	289.1	307.5	312.1	402.6	523.3	583.6	697.0	923.8	1093.9	1114.9
122.5°	287.3	305.8	324.3	328.9	411.0	520.4	575.1	677.2	881.6	1034.7	1055.4
125°	312.8	329.6	346.4	350.6	422.4	518.1	565.9	652.7	826.2	956.4	975.5
127.5°	333.4	350.4	367.3	371.6	433.8	516.7	558.2	632.7	781.7	893.4	909.5
130°	344.4	362.7	381.1	385.6	442.1	517.5	555.2	621.5	754.2	853.6	868.5
132.5°	355.8	374.1	392.5	397.0	448.9	518.1	552.7	612.1	730.8	819.8	833.1
135°	372.8	389.5	406.1	410.2	456.2	517.5	548.2	598.0	697.4	771.9	783.5
137.5°	390.1	406.6	423.1	427.2	467.3	520.8	547.5	589.6	673.7	736.7	746.1
140°	404.4	419.6	434.8	438.6	474.1	521.3	544.9	581.3	653.8	708.3	717.0
142.5°	415.4	429.4	443.5	447.0	479.7	523.2	544.9	576.8	640.6	688.5	696.1
145°	432.4	444.6	456.9	460.0	487.1	523.3	541.3	567.3	619.6	658.7	664.4
147.5°	449.3	461.2	473.2	476.1	497.8	526.8	541.3	561.8	602.8	633.6	638.3
150°	460.3	471.1	481.9	484.6	503.5	528.7	541.3	558.6	593.3	619.3	623.1
152.5°	471.7	480.0	488.1	490.1	507.2	529.9	541.3	556.1	585.6	607.9	610.8
155°	488.6	494.7	500.8	502.3	515.3	532.6	541.3	553.1	576.5	594.2	596.2
157.5°	501.1	507.0	512.9	514.4	523.3	535.3	541.3	550.4	568.7	582.4	583.8
160°	509.6	514.2	518.8	520.0	527.1	536.6	541.3	549.1	564.8	576.5	577.3
162.5°	518.1	521.6	524.9	525.8	531.0	537.9	541.3	547.9	561.2	571.1	571.8
165°	527.3	530.4	533.4	534.2	536.6	539.7	541.3	546.0	555.5	562.6	563.4
167.5°	535.8	537.2	538.7	539.1	541.0	543.6	544.9	548.1	554.3	559.0	559.3
170°	541.3	542.7	544.2	544.6	544.7	544.9	544.9	548.1	554.3	559.0	559.0
172.5°	544.2	544.6	544.9	544.9	544.9	544.9	544.9	547.4	552.4	556.0	555.7
175°	548.2	548.2	548.2	548.2	547.2	545.7	544.9	546.5	549.6	551.9	551.9
177.5°	548.2	548.2	548.2	548.2	547.4	546.2	545.7	546.9	549.3	551.2	550.8
180°	548.2	548.2	548.2	548.2	548.2	548.2	548.2	548.2	548.2	548.2	548.2



TEST NUMBER: P936745

CATALOG NUMBER: SQ4-FB-050U-075D-92765-1D-UNV-STD-W-8-3500K

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	555.2	555.2
2.5°	592.7	589.1
5°	762.3	765.9
7.5°	1026.6	1024.8
10°	1276.5	1292.6
12.5°	1458.6	1462.2
15°	1569.3	1576.5
17.5°	1612.2	1613.9
20°	1613.9	1610.4
22.5°	1594.3	1590.7
25°	1571.1	1569.3
27.5°	1549.7	1551.5
30°	1540.8	1546.1
32.5°	1540.8	1549.7
35°	1544.3	1553.2
37.5°	1542.5	1553.2
40°	1535.4	1547.9
42.5°	1515.8	1524.7
45°	1485.4	1496.1
47.5°	1446.1	1453.3
50°	1396.1	1403.3
52.5°	1333.7	1335.4
55°	1258.7	1265.8
57.5°	1178.3	1180.1
60°	1089.1	1094.4
62.5°	994.4	994.4
65°	894.4	898.0
67.5°	790.9	799.8
70°	685.5	687.3
72.5°	582.0	582.0
75°	474.9	476.7
77.5°	373.1	373.1
80°	276.7	278.5
82.5°	191.0	194.6
85°	119.6	119.6
87.5°	55.3	50.0
90°	14.0	14.0
92.5°	56.0	44.9
95°	195.2	161.6
97.5°	467.7	403.6
100°	673.9	597.5
102.5°	876.7	811.3
105°	1135.3	1100.2
107.5°	1304.7	1313.2
110°	1369.3	1406.0



TEST NUMBER: P936745

CATALOG NUMBER: SQ4-FB-050U-075D-92765-1D-UNV-STD-W-8-3500K

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	1375.1	1431.3
115°	1338.6	1416.6
117.5°	1261.4	1347.9
120°	1199.0	1283.1
122.5°	1138.4	1221.3
125°	1051.8	1128.2
127.5°	973.9	1038.4
130°	928.1	987.6
132.5°	886.5	939.8
135°	829.4	875.4
137.5°	783.7	821.3
140°	752.2	787.4
142.5°	726.2	756.5
145°	687.3	710.2
147.5°	657.3	676.3
150°	638.5	653.8
152.5°	622.4	634.0
155°	603.9	611.5
157.5°	589.2	594.6
160°	580.5	583.6
162.5°	574.8	577.7
165°	566.5	569.6
167.5°	560.6	561.9
170°	559.0	559.0
172.5°	554.6	553.4
175°	551.9	551.9
177.5°	549.6	548.2
180°	548.2	548.2



TEST NUMBER: P936745
 CATALOG NUMBER: SQ4-FB-050U-075D-92765-1D-UNV-STD-W-8-3500K

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	4.71	5.66	5.62	6.59	7.79	17.89	18.84	18.80	19.77	20.97
	3H	5.43	6.28	6.34	7.22	8.44	19.74	20.59	20.66	21.53	22.76
	4H	5.73	6.54	6.66	7.48	8.71	20.39	21.20	21.32	22.14	23.37
	6H	5.98	6.73	6.93	7.68	8.93	20.82	21.57	21.77	22.52	23.77
	8H	6.05	6.76	7.01	7.73	8.98	20.95	21.66	21.90	22.63	23.87
	12H	6.07	6.75	7.03	7.72	8.99	21.02	21.69	21.98	22.66	23.93
4H	2H	11.94	12.75	12.88	13.69	14.93	18.18	18.99	19.12	19.93	21.16
	3H	13.52	14.19	14.47	15.17	16.42	20.23	20.91	21.18	21.88	23.13
	4H	13.61	14.23	14.57	15.20	16.47	21.00	21.62	21.96	22.59	23.86
	6H	13.63	14.17	14.60	15.16	16.43	21.55	22.08	22.52	23.08	24.34
	8H	13.61	14.11	14.58	15.10	16.38	21.71	22.21	22.69	23.20	24.48
	12H	13.57	14.02	14.56	15.03	16.32	21.81	22.26	22.80	23.27	24.56
8H	4H	15.07	15.57	16.04	16.55	17.84	21.07	21.57	22.04	22.56	23.84
	6H	15.31	15.73	16.31	16.76	18.04	21.70	22.12	22.70	23.15	24.43
	8H	15.33	15.70	16.34	16.72	18.02	21.92	22.29	22.93	23.31	24.61
	12H	15.30	15.63	16.32	16.64	17.98	22.07	22.40	23.09	23.41	24.75
12H	4H	15.21	15.67	16.21	16.67	17.96	21.03	21.48	22.02	22.48	23.77
	6H	15.57	15.94	16.58	16.96	18.26	21.69	22.05	22.70	23.07	24.37
	8H	15.65	15.97	16.66	16.98	18.33	21.92	22.24	22.94	23.26	24.60