

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P936947

Luminaire Tested: SQ4-FB-050U-125D-92765-1D-UNV-STD-W-8-5000K

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P936947
REPORT IS A COMBINATION OF REPORTS P933488 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-050U-125D-92765-1D-UNV-STD-W-8-5000K
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 11335.2 lumens
Efficiency: N/A
Efficacy: 101.2 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 8' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 112
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P936947
CATALOG NUMBER: SQ4-FB-050U-125D-92765-1D-UNV-STD-W-8-5000K

Luminous Intensity Polar Plot

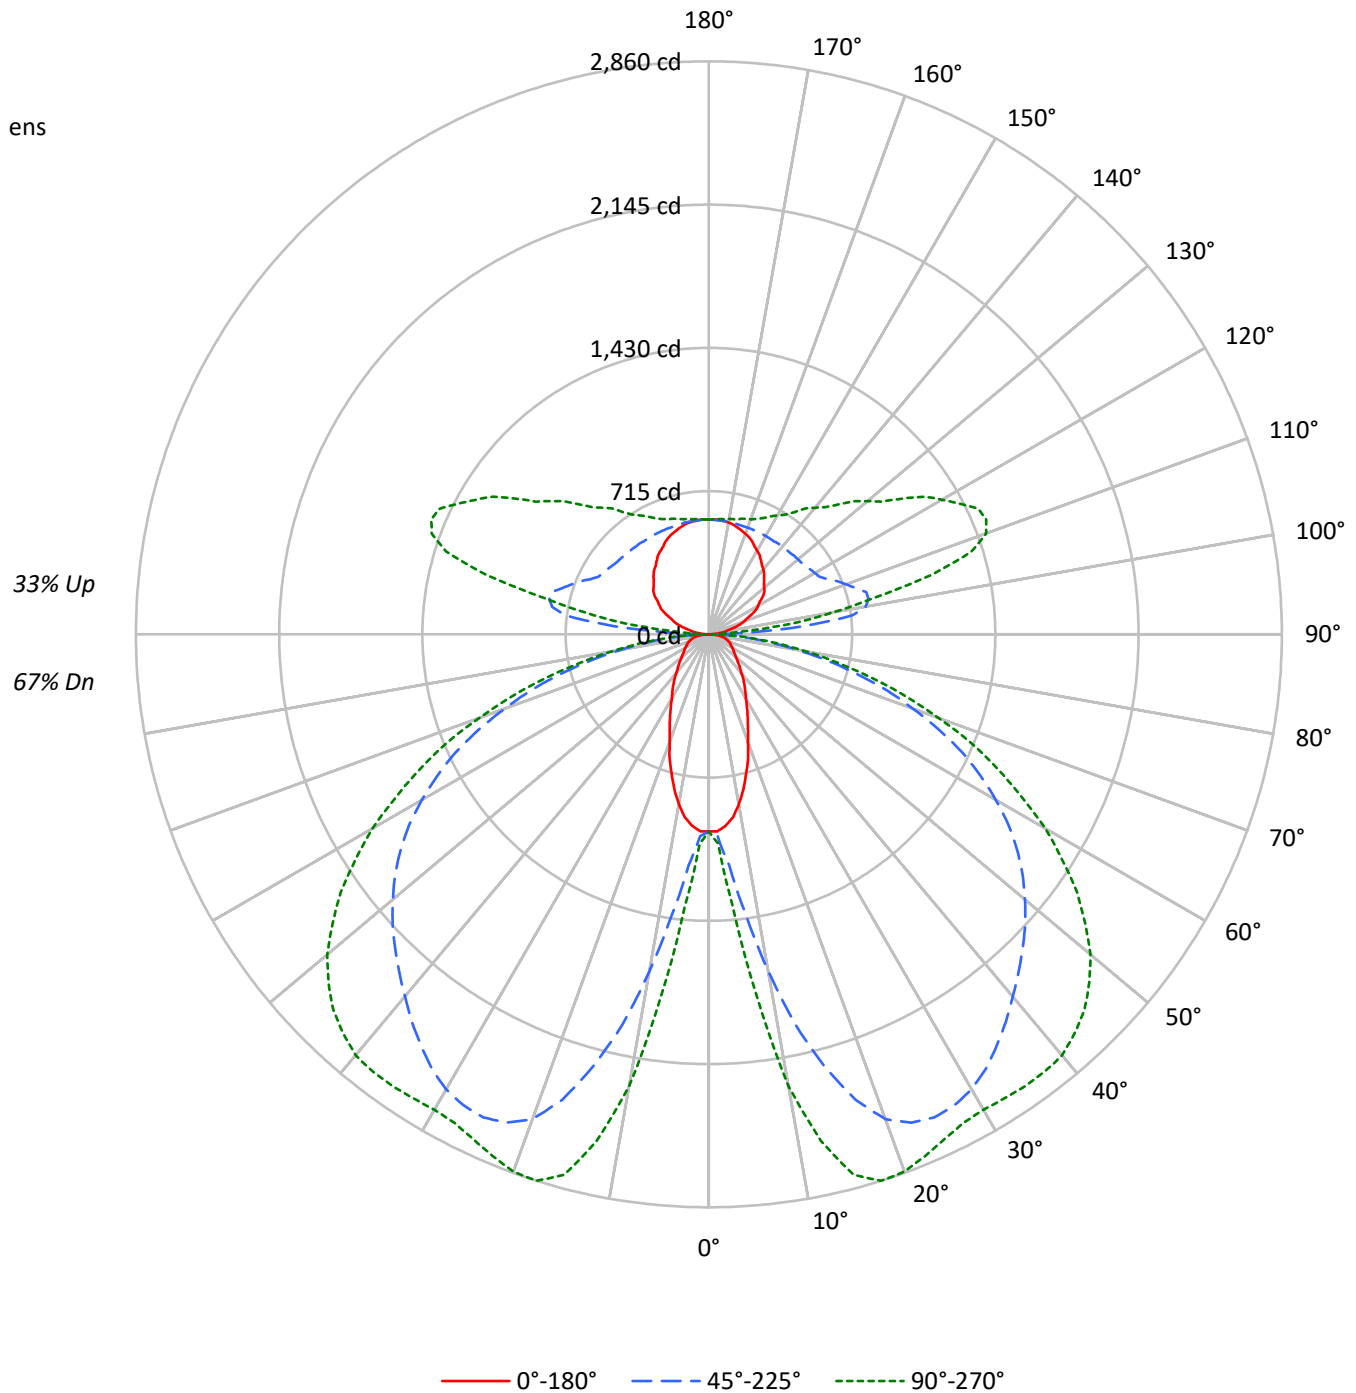



TEST NUMBER: P936947

CATALOG NUMBER: SQ4-FB-050U-125D-92765-1D-UNV-STD-W-8-5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	111	111	111	111	105	105	105	105	93	93	93	82	82	82	72	72	72	67	67	67	67
1	101	96	92	88	95	91	87	83	80	78	75	71	69	67	62	61	59	55	55	55	55
2	91	83	76	71	86	78	72	67	70	65	61	61	58	55	54	51	49	45	45	45	45
3	83	72	64	58	77	68	61	55	61	55	50	54	49	45	47	44	41	37	37	37	37
4	75	64	55	48	70	60	52	46	53	47	42	47	42	38	42	38	34	31	31	31	31
5	69	56	47	41	64	53	45	39	47	41	36	42	37	32	37	33	29	26	26	26	26
6	63	50	41	35	59	47	39	34	42	36	31	38	32	28	33	29	25	23	23	23	23
7	58	45	36	30	55	43	35	29	38	32	27	34	29	24	30	26	22	20	20	20	20
8	54	41	32	27	51	39	31	26	35	28	24	31	26	22	27	23	20	17	17	17	17
9	50	37	29	24	47	35	28	23	32	25	21	28	23	19	25	21	17	15	15	15	15
10	47	34	26	21	44	32	25	20	29	23	19	26	21	17	23	19	16	14	14	14	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4565	4565	4565
5°	4459	5276	6136
10°	4045	7691	10172
15°	3438	10048	12283
20°	2799	11644	12518
25°	2335	12185	12264
30°	1969	12262	12241
35°	1741	12058	12557
40°	1517	11793	12885
45°	1374	11599	12935
50°	1260	11425	12721
55°	1207	11170	12157
60°	1235	10679	11266
65°	1285	9933	10043
70°	1369	8663	8484
75°	1517	7064	6621
80°	1659	4898	4461
85°	1472	2599	2284

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 12935 cd/sqm



TEST NUMBER: P936947

CATALOG NUMBER: SQ4-FB-050U-125D-92765-1D-UNV-STD-W-8-5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	127.3	1.1
10°-20°	564.1	5.0
20°-30°	986.6	8.7
30°-40°	1270.1	11.2
40°-50°	1418.6	12.5
50°-60°	1358.7	12.0
60°-70°	1076.8	9.5
70°-80°	633.2	5.6
80°-90°	178.1	1.6
90°-100°	279.8	2.5
100°-110°	735.7	6.5
110°-120°	762.9	6.7
120°-130°	611.9	5.4
130°-140°	480.1	4.2
140°-150°	368.5	3.3
150°-160°	265.4	2.3
160°-170°	162.4	1.4
170°-180°	54.9	0.5
0°-30°	1678.0	14.8
0°-40°	2948.0	26.0
0°-60°	5725.4	50.5
0°-90°	7613.5	67.2
90°-120°	1778.5	15.7
90°-150°	3239.0	28.6
90°-180°	3722.0	32.8
0°-180°	11335.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	984	984	984	984	984	
5°	958	1028	1158	1310	1357	88
15°	718	1326	2234	2708	2794	200
25°	459	1503	2661	2778	2781	211
35°	310	1436	2506	2648	2752	194
45°	212	1145	2214	2537	2651	164
55°	152	728	1879	2183	2243	138
65°	120	386	1395	1569	1591	119
75°	89	237	766	842	845	93
85°	32	73	190	209	212	34
90°	4	11	29	15	15	5
95°	37	145	482	248	169	41
105°	132	201	813	1235	1152	141
115°	236	286	652	1300	1483	233
125°	328	367	593	1001	1181	291
135°	390	430	574	808	917	302
145°	453	482	567	690	744	284
155°	512	526	567	622	640	235
165°	552	559	567	589	596	156
175°	574	574	571	578	578	54
180°	574	574	574	574	574	



TEST NUMBER: P936947

CATALOG NUMBER: SQ4-FB-050U-125D-92765-1D-UNV-STD-W-8-5000K

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	983.9	983.9	983.9	983.9	983.9	983.9	983.9	983.9	983.9	983.9	983.9
2.5°	983.9	983.9	990.2	993.4	999.7	1002.8	1009.2	1015.6	1034.5	1037.7	1044.0
5°	958.5	971.3	1012.4	1028.2	1072.5	1132.6	1157.9	1199.0	1284.4	1309.7	1325.5
7.5°	920.6	949.1	1050.3	1075.7	1186.3	1344.6	1410.9	1499.5	1635.5	1702.0	1755.8
10°	860.5	920.6	1100.9	1161.0	1341.4	1581.8	1705.2	1828.6	2034.2	2126.0	2160.8
12.5°	794.0	892.2	1154.7	1237.0	1496.4	1847.5	1996.3	2132.3	2366.4	2489.8	2508.8
15°	718.1	851.0	1205.3	1325.5	1660.9	2069.0	2233.5	2401.2	2619.5	2708.0	2730.2
17.5°	651.7	819.4	1252.8	1379.3	1787.4	2268.3	2435.9	2575.2	2752.3	2812.4	2828.2
20°	569.4	768.8	1284.4	1448.9	1920.4	2413.9	2575.2	2682.7	2803.0	2840.9	2847.2
22.5°	509.3	715.0	1303.4	1474.2	2008.9	2502.4	2638.5	2723.8	2806.1	2818.8	2822.0
25°	458.8	654.9	1300.3	1502.7	2084.9	2556.2	2660.6	2723.8	2771.3	2777.7	2777.7
27.5°	411.3	588.4	1287.6	1509.1	2141.8	2568.9	2651.1	2695.4	2717.6	2730.2	2730.2
30°	370.1	525.1	1256.0	1496.4	2167.1	2556.2	2622.6	2644.8	2666.9	2685.9	2695.4
32.5°	338.6	465.0	1208.5	1471.0	2170.2	2524.5	2572.0	2584.6	2616.3	2660.6	2676.4
35°	310.0	404.9	1154.7	1436.3	2151.2	2474.0	2505.6	2518.2	2581.5	2647.9	2670.1
37.5°	281.5	360.6	1085.1	1376.2	2122.8	2413.9	2435.9	2458.1	2556.2	2635.3	2660.6
40°	253.1	322.7	1002.8	1309.7	2078.5	2341.1	2360.0	2394.8	2524.5	2616.3	2641.6
42.5°	231.0	291.1	914.3	1240.2	2021.6	2258.8	2287.3	2337.9	2486.6	2584.6	2613.2
45°	212.0	259.4	819.4	1145.2	1948.8	2173.4	2214.5	2284.1	2442.3	2537.3	2562.5
47.5°	193.0	237.2	721.3	1047.2	1869.7	2087.9	2141.8	2220.9	2382.2	2474.0	2496.1
50°	177.1	215.2	623.3	942.7	1784.3	1996.3	2059.5	2141.8	2306.3	2391.7	2420.1
52.5°	164.5	196.1	531.5	838.3	1686.2	1901.3	1974.1	2059.5	2214.5	2296.8	2315.7
55°	151.9	180.3	452.4	727.7	1585.0	1800.1	1879.2	1961.5	2113.3	2182.9	2195.5
57.5°	145.5	167.7	385.9	623.3	1477.4	1686.2	1774.8	1850.7	1993.1	2046.8	2059.5
60°	136.0	158.2	335.4	534.7	1360.4	1578.6	1654.5	1730.5	1850.7	1895.0	1904.5
62.5°	126.6	151.9	297.4	449.2	1240.2	1452.1	1528.1	1597.6	1698.8	1730.5	1743.1
65°	120.2	145.5	268.9	385.9	1116.8	1319.2	1395.1	1455.2	1537.5	1569.2	1575.4
67.5°	113.8	139.2	246.8	332.2	993.4	1186.3	1243.3	1300.3	1363.5	1395.1	1398.3
70°	104.4	132.9	227.8	294.2	866.8	1034.5	1081.9	1142.0	1192.7	1208.5	1218.0
72.5°	98.1	123.4	215.2	265.7	737.1	889.0	933.3	968.1	1012.4	1028.2	1028.2
75°	88.6	110.8	202.5	237.2	604.3	727.7	765.6	800.4	835.2	841.5	832.1
77.5°	79.1	98.1	174.0	199.3	471.4	575.8	607.4	626.4	654.9	661.2	664.4
80°	66.5	85.4	136.0	155.0	341.6	423.9	446.0	461.9	487.2	487.2	493.5
82.5°	50.7	66.5	98.1	110.8	231.0	291.1	310.0	319.5	335.4	335.4	335.4
85°	31.6	41.1	63.3	72.7	139.2	177.1	189.8	193.0	205.6	208.8	208.8
87.5°	15.8	22.2	41.1	44.3	72.7	91.8	91.8	98.1	98.1	94.9	91.8
90°	3.8	6.9	10.0	10.7	16.9	25.1	29.3	26.0	19.5	14.7	14.7
92.5°	15.4	41.6	67.9	74.4	104.6	144.8	164.9	144.5	103.8	73.2	70.3
95°	37.0	85.0	132.9	144.9	257.2	407.1	482.0	430.2	326.4	248.5	239.8
97.5°	63.9	106.2	148.5	159.1	346.5	596.3	721.3	688.5	622.9	573.7	556.9
100°	84.8	123.1	161.4	171.1	379.0	656.3	794.9	797.3	802.1	805.6	785.6
102.5°	102.5	138.3	174.0	183.0	393.9	675.1	815.7	857.5	941.1	1003.7	986.6
105°	132.5	162.8	193.2	200.8	405.0	677.3	813.4	907.0	1094.4	1234.9	1225.7
107.5°	163.4	191.6	219.8	226.9	407.0	647.1	767.1	897.8	1159.1	1355.1	1357.4
110°	184.1	209.7	235.3	241.6	404.0	620.4	728.6	874.7	1166.8	1385.9	1395.5



TEST NUMBER: P936947

CATALOG NUMBER: SQ4-FB-050U-125D-92765-1D-UNV-STD-W-8-5000K

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	204.6	228.9	253.2	259.3	404.1	597.1	693.6	843.0	1142.0	1366.3	1381.0
115°	235.5	257.9	280.3	285.9	407.8	570.4	651.6	795.6	1083.6	1299.6	1320.0
117.5°	265.8	286.2	306.6	311.7	415.4	553.5	622.6	752.6	1012.6	1207.5	1230.2
120°	283.6	302.8	322.0	326.8	421.6	547.9	611.1	729.8	967.3	1145.5	1167.4
122.5°	300.9	320.2	339.6	344.4	430.3	544.9	602.2	709.2	923.1	1083.5	1105.2
125°	327.5	345.1	362.8	367.2	442.3	542.5	592.6	683.5	865.2	1001.4	1021.4
127.5°	349.1	366.9	384.6	389.1	454.3	541.1	584.5	662.5	818.5	935.5	952.4
130°	360.6	379.8	399.0	403.8	463.0	541.9	581.4	650.8	789.7	893.9	909.5
132.5°	372.6	391.7	411.0	415.8	470.1	542.5	578.8	640.9	765.2	858.4	872.4
135°	390.3	407.8	425.2	429.6	477.7	541.9	574.1	626.2	730.3	808.3	820.4
137.5°	408.5	425.8	443.1	447.4	489.3	545.3	573.3	617.4	705.4	771.4	781.2
140°	423.4	439.4	455.3	459.3	496.4	545.9	570.6	608.7	684.7	741.7	750.8
142.5°	435.0	449.7	464.5	468.1	502.3	547.8	570.6	604.0	670.8	720.9	728.9
145°	452.8	465.6	478.5	481.7	510.1	547.9	566.8	594.1	648.8	689.7	695.7
147.5°	470.4	483.0	495.5	498.6	521.3	551.7	566.8	588.3	631.2	663.5	668.4
150°	482.0	493.3	504.6	507.5	527.3	553.6	566.8	584.9	621.3	648.5	652.5
152.5°	494.0	502.6	511.1	513.2	531.1	554.9	566.8	582.3	613.3	636.5	639.6
155°	511.7	518.0	524.4	526.0	539.6	557.7	566.8	579.1	603.7	622.2	624.3
157.5°	524.7	530.9	537.1	538.7	548.0	560.5	566.8	576.3	595.5	609.9	611.3
160°	533.6	538.5	543.3	544.5	551.9	561.9	566.8	575.0	591.4	603.7	604.6
162.5°	542.5	546.1	549.7	550.6	556.1	563.3	566.8	573.7	587.6	598.0	598.8
165°	552.1	555.4	558.6	559.4	561.9	565.1	566.8	571.8	581.7	589.1	590.0
167.5°	561.0	562.5	564.1	564.5	566.5	569.2	570.6	573.9	580.5	585.3	585.7
170°	566.8	568.3	569.9	570.3	570.4	570.5	570.6	573.9	580.5	585.3	585.3
172.5°	569.9	570.3	570.5	570.6	570.6	570.6	570.6	573.3	578.4	582.2	581.9
175°	574.1	574.1	574.1	574.1	573.0	571.4	570.6	572.2	575.5	577.9	577.9
177.5°	574.1	574.1	574.1	574.1	573.2	571.9	571.4	572.7	575.2	577.2	576.8
180°	574.1	574.1	574.1	574.1	574.1	574.1	574.1	574.1	574.1	574.1	574.1



TEST NUMBER: P936947

CATALOG NUMBER: SQ4-FB-050U-125D-92765-1D-UNV-STD-W-8-5000K

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	983.9	983.9
2.5°	1050.3	1044.0
5°	1350.8	1357.2
7.5°	1819.0	1815.9
10°	2262.0	2290.5
12.5°	2584.6	2591.0
15°	2780.8	2793.5
17.5°	2856.7	2859.9
20°	2859.9	2853.6
22.5°	2825.1	2818.8
25°	2784.0	2780.8
27.5°	2746.0	2749.2
30°	2730.2	2739.7
32.5°	2730.2	2746.0
35°	2736.5	2752.3
37.5°	2733.4	2752.3
40°	2720.7	2742.9
42.5°	2685.9	2701.8
45°	2632.1	2651.1
47.5°	2562.5	2575.2
50°	2474.0	2486.6
52.5°	2363.2	2366.4
55°	2230.3	2243.0
57.5°	2087.9	2091.1
60°	1929.8	1939.3
62.5°	1762.1	1762.1
65°	1585.0	1591.3
67.5°	1401.5	1417.3
70°	1214.8	1218.0
72.5°	1031.4	1031.4
75°	841.5	844.7
77.5°	661.2	661.2
80°	490.3	493.5
82.5°	338.6	344.8
85°	212.0	212.0
87.5°	98.1	88.6
90°	14.7	14.7
92.5°	58.6	47.0
95°	204.4	169.2
97.5°	489.8	422.7
100°	705.7	625.7
102.5°	918.1	849.6
105°	1188.9	1152.0
107.5°	1366.3	1375.1
110°	1433.8	1472.3



TEST NUMBER: P936947

CATALOG NUMBER: SQ4-FB-050U-125D-92765-1D-UNV-STD-W-8-5000K

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	1439.9	1498.8
115°	1401.7	1483.4
117.5°	1320.8	1411.4
120°	1255.5	1343.5
122.5°	1192.0	1278.9
125°	1101.4	1181.4
127.5°	1019.9	1087.3
130°	971.8	1034.2
132.5°	928.3	984.1
135°	868.5	916.7
137.5°	820.7	860.0
140°	787.7	824.5
142.5°	760.5	792.2
145°	719.7	743.7
147.5°	688.3	708.2
150°	668.6	684.7
152.5°	651.8	663.9
155°	632.3	640.4
157.5°	617.0	622.6
160°	607.8	611.1
162.5°	601.9	604.9
165°	593.2	596.4
167.5°	587.0	588.4
170°	585.3	585.3
172.5°	580.7	579.5
175°	577.9	577.9
177.5°	575.5	574.1
180°	574.1	574.1



TEST NUMBER: P936947

CATALOG NUMBER: SQ4-FB-050U-125D-92765-1D-UNV-STD-W-8-5000K

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.71	8.80	8.49	9.62	10.62	20.89	21.98	21.67	22.80	23.80
	3H	8.43	9.42	9.23	10.24	11.27	22.74	23.73	23.54	24.56	25.58
	4H	8.74	9.67	9.55	10.51	11.55	23.40	24.33	24.21	25.17	26.21
	6H	9.00	9.87	9.83	10.71	11.76	23.84	24.71	24.67	25.55	26.60
	8H	9.08	9.90	9.92	10.76	11.82	23.97	24.79	24.81	25.65	26.71
	12H	9.10	9.89	9.95	10.74	11.82	24.05	24.83	24.89	25.69	26.77
4H	2H	14.95	15.89	15.77	16.72	17.76	21.19	22.12	22.01	22.96	23.99
	3H	16.54	17.32	17.37	18.19	19.25	23.26	24.04	24.09	24.91	25.96
	4H	16.64	17.36	17.49	18.22	19.31	24.03	24.75	24.88	25.61	26.69
	6H	16.67	17.29	17.53	18.18	19.26	24.59	25.21	25.45	26.10	27.18
	8H	16.65	17.23	17.52	18.12	19.22	24.75	25.34	25.62	26.22	27.32
	12H	16.62	17.15	17.51	18.05	19.15	24.86	25.38	25.75	26.29	27.39
8H	4H	18.11	18.69	18.98	19.57	20.67	24.11	24.69	24.98	25.58	26.68
	6H	18.36	18.85	19.26	19.77	20.87	24.75	25.24	25.65	26.16	27.26
	8H	18.38	18.81	19.29	19.73	20.85	24.98	25.41	25.88	26.32	27.44
	12H	18.36	18.74	19.27	19.65	20.82	25.13	25.51	26.04	26.42	27.59
12H	4H	18.27	18.79	19.15	19.69	20.80	24.08	24.60	24.96	25.51	26.61
	6H	18.63	19.05	19.53	19.97	21.09	24.74	25.17	25.64	26.09	27.20
	8H	18.71	19.08	19.61	19.99	21.16	24.98	25.36	25.89	26.27	27.44