

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P937227

Luminaire Tested: SQ4-FB-075U-100D-92765-1D-UNV-STD-W-12-3500K

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P937227
REPORT IS A COMBINATION OF REPORTS P933495 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-075U-100D-92765-1D-UNV-STD-W-12-3500K
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 16534.9 lumens
Efficiency: N/A
Efficacy: 107.6 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 12' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 153.6
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P937227
CATALOG NUMBER: SQ4-FB-075U-100D-92765-1D-UNV-STD-W-12-3500K

Luminous Intensity Polar Plot

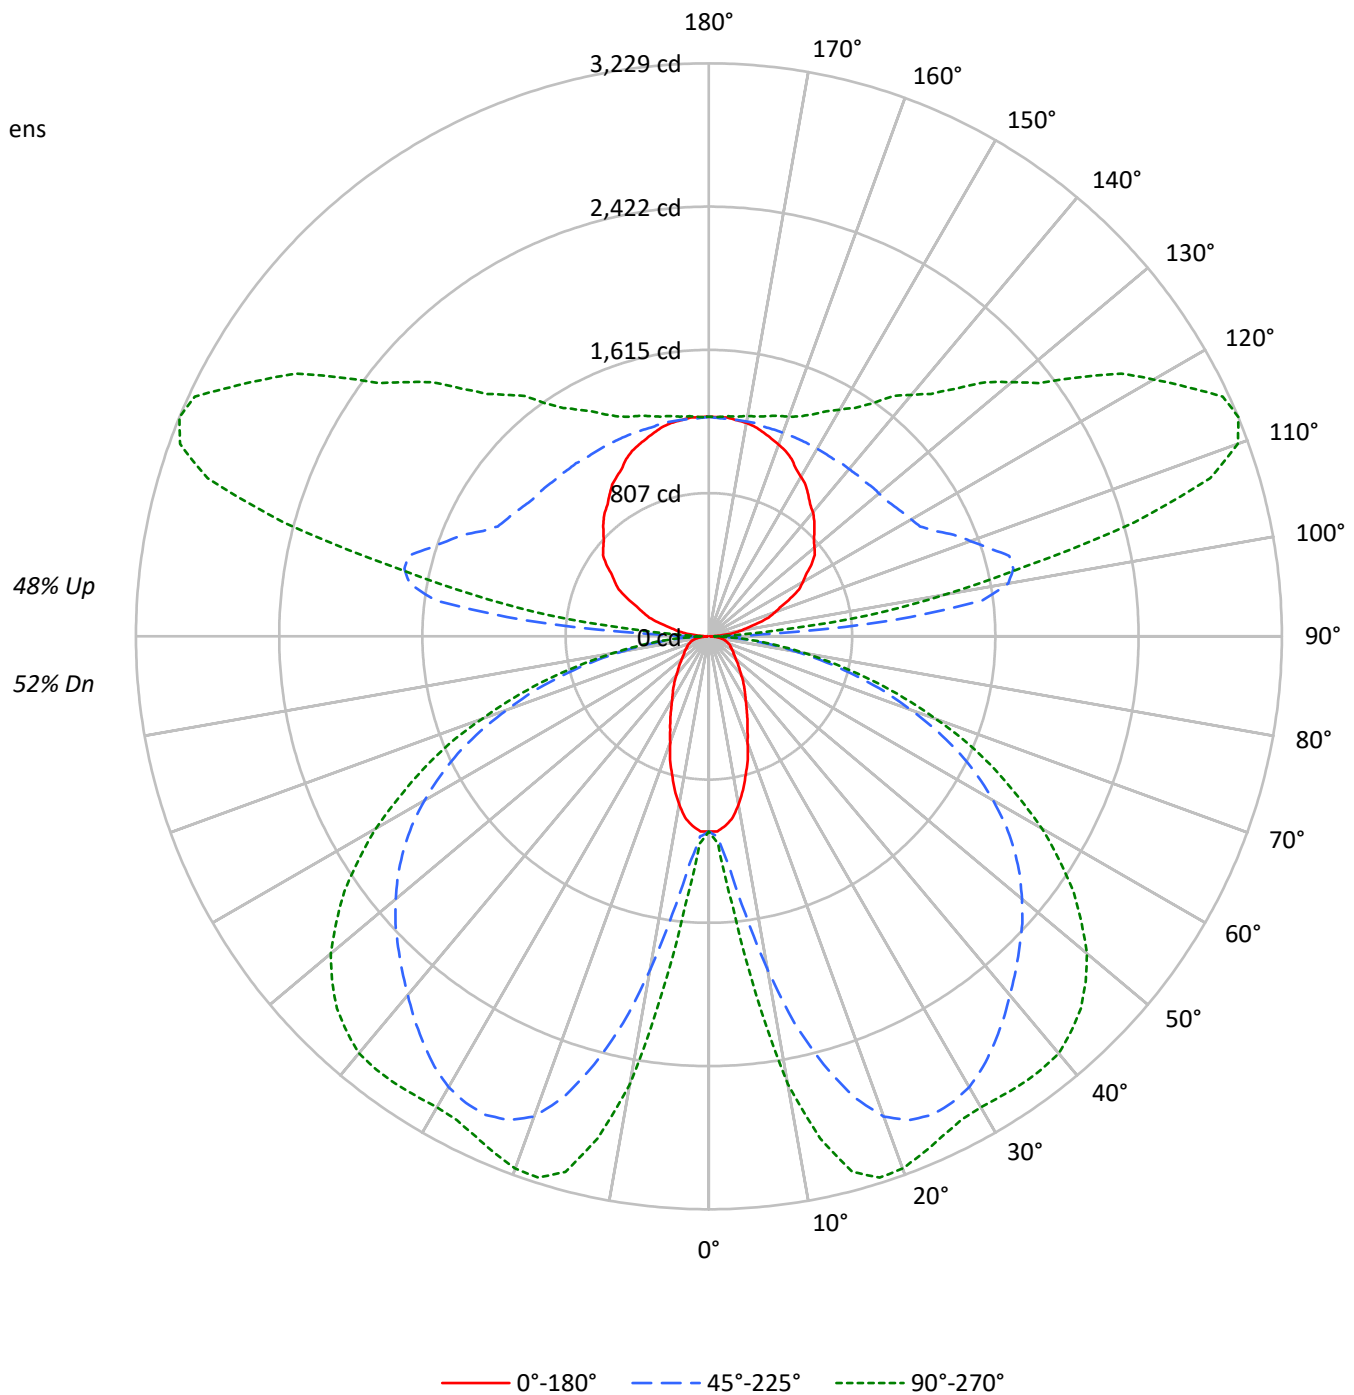



TEST NUMBER: P937227

CATALOG NUMBER: SQ4-FB-075U-100D-92765-1D-UNV-STD-W-12-3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	99	99	99	99	84	84	84	70	70	70	58	58	58	52
1	98	93	89	85	90	86	82	79	73	70	68	61	59	57	50	49	47	42
2	88	80	74	69	81	74	69	64	63	59	55	53	50	47	43	41	39	34
3	80	70	62	56	74	65	58	53	55	50	46	46	42	39	38	35	32	28
4	73	62	53	47	67	57	50	44	49	43	38	41	36	33	33	30	27	24
5	67	55	46	40	61	51	43	37	43	37	33	36	32	28	30	26	23	20
6	61	49	40	34	56	45	38	32	39	33	28	32	28	24	27	23	20	17
7	56	44	35	30	52	41	33	28	35	29	24	29	25	21	24	20	18	15
8	52	39	31	26	48	37	29	24	31	26	21	27	22	19	22	18	16	13
9	49	36	28	23	45	33	26	22	29	23	19	24	20	16	20	17	14	12
10	45	33	25	20	42	31	24	19	26	21	17	22	18	15	19	15	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3403	3403	3403
5°	3326	3935	4575
10°	3018	5737	7584
15°	2566	7497	9158
20°	2090	8690	9333
25°	1744	9096	9143
30°	1471	9155	9126
35°	1302	9006	9362
40°	1135	8811	9606
45°	1029	8669	9644
50°	944	8541	9484
55°	905	8354	9063
60°	928	7991	8400
65°	966	7436	7488
70°	1033	6490	6325
75°	1149	5296	4937
80°	1264	3678	3326
85°	1144	1955	1703

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 9644 cd/sqm



TEST NUMBER: P937227

CATALOG NUMBER: SQ4-FB-075U-100D-92765-1D-UNV-STD-W-12-3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	142.3	0.9
10°-20°	630.8	3.8
20°-30°	1103.4	6.7
30°-40°	1420.4	8.6
40°-50°	1586.5	9.6
50°-60°	1519.5	9.2
60°-70°	1204.2	7.3
70°-80°	708.1	4.3
80°-90°	201.4	1.2
90°-100°	602.9	3.6
100°-110°	1585.1	9.6
110°-120°	1643.6	9.9
120°-130°	1318.4	8.0
130°-140°	1034.4	6.3
140°-150°	794.0	4.8
150°-160°	571.8	3.5
160°-170°	349.9	2.1
170°-180°	118.2	0.7
0°-30°	1876.5	11.3
0°-40°	3296.9	19.9
0°-60°	6403.0	38.7
0°-90°	8516.8	51.5
90°-120°	3831.6	23.2
90°-150°	6978.3	42.2
90°-180°	8018.0	48.5
0°-180°	16534.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1100	1100	1100	1100	1100	
5°	1072	1150	1295	1465	1518	99
15°	803	1482	2498	3028	3124	224
25°	513	1680	2976	3106	3110	236
35°	347	1606	2802	2961	3078	217
45°	237	1281	2477	2838	2965	183
55°	170	814	2102	2441	2508	155
65°	134	432	1560	1755	1780	133
75°	99	265	856	941	945	104
85°	35	81	212	234	237	38
90°	8	23	63	32	32	9
95°	80	312	1038	535	364	88
105°	286	432	1752	2660	2482	303
115°	507	616	1404	2800	3196	501
125°	706	791	1277	2158	2545	626
135°	841	926	1237	1742	1975	651
145°	975	1038	1221	1486	1602	611
155°	1102	1133	1221	1341	1380	507
165°	1190	1205	1221	1269	1285	336
175°	1237	1237	1229	1245	1245	117
180°	1237	1237	1237	1237	1237	



TEST NUMBER: P937227

CATALOG NUMBER: SQ4-FB-075U-100D-92765-1D-UNV-STD-W-12-3500K

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	1100.3	1100.3	1100.3	1100.3	1100.3	1100.3	1100.3	1100.3	1100.3	1100.3	1100.3
2.5°	1100.3	1100.3	1107.4	1111.0	1118.0	1121.6	1128.6	1135.7	1156.9	1160.5	1167.5
5°	1072.0	1086.1	1132.2	1149.9	1199.4	1266.6	1294.9	1340.9	1436.4	1464.7	1482.4
7.5°	1029.5	1061.4	1174.6	1202.9	1326.7	1503.6	1578.0	1677.0	1829.2	1903.4	1963.6
10°	962.3	1029.5	1231.2	1298.4	1500.1	1769.0	1907.0	2045.0	2274.9	2377.5	2416.4
12.5°	888.1	997.7	1291.4	1383.4	1673.5	2066.1	2232.4	2384.6	2646.4	2784.4	2805.6
15°	803.1	951.7	1347.9	1482.4	1857.5	2313.8	2497.8	2685.4	2929.5	3028.5	3053.3
17.5°	728.8	916.4	1401.1	1542.5	1998.9	2536.7	2724.3	2879.9	3078.0	3145.2	3163.0
20°	636.8	859.8	1436.4	1620.4	2147.6	2699.5	2879.9	3000.2	3134.6	3177.1	3184.2
22.5°	569.6	799.6	1457.6	1648.7	2246.6	2798.5	2950.6	3046.2	3138.2	3152.4	3155.9
25°	513.0	732.4	1454.1	1680.5	2331.5	2858.7	2975.5	3046.2	3099.3	3106.3	3106.3
27.5°	460.0	658.0	1440.0	1687.6	2395.3	2872.8	2964.8	3014.4	3039.1	3053.3	3053.3
30°	413.9	587.3	1404.5	1673.5	2423.6	2858.7	2933.0	2957.8	2982.5	3003.8	3014.4
32.5°	378.6	520.0	1351.5	1645.2	2427.0	2823.4	2876.4	2890.6	2925.9	2975.5	2993.1
35°	346.7	452.8	1291.4	1606.3	2405.8	2766.7	2802.1	2816.2	2887.0	2961.3	2986.1
37.5°	314.9	403.4	1213.5	1539.1	2374.0	2699.5	2724.3	2749.0	2858.7	2947.2	2975.5
40°	283.0	360.9	1121.6	1464.7	2324.5	2618.1	2639.3	2678.2	2823.4	2925.9	2954.2
42.5°	258.2	325.5	1022.5	1386.9	2260.7	2526.1	2558.0	2614.6	2780.9	2890.6	2922.3
45°	237.1	290.1	916.4	1280.7	2179.4	2430.6	2476.6	2554.4	2731.3	2837.5	2865.8
47.5°	215.8	265.4	806.7	1171.1	2091.0	2335.1	2395.3	2483.6	2664.1	2766.7	2791.5
50°	198.2	240.6	697.0	1054.4	1995.5	2232.4	2303.2	2395.3	2579.2	2674.7	2706.6
52.5°	184.0	219.3	594.4	937.6	1885.7	2126.3	2207.7	2303.2	2476.6	2568.6	2589.8
55°	169.9	201.6	505.9	813.7	1772.6	2013.1	2101.6	2193.5	2363.4	2441.2	2455.3
57.5°	162.7	187.5	431.7	697.0	1652.2	1885.7	1984.8	2069.7	2229.0	2289.0	2303.2
60°	152.1	176.9	375.0	597.9	1521.3	1765.4	1850.4	1935.3	2069.7	2119.3	2129.9
62.5°	141.5	169.9	332.6	502.4	1386.9	1623.9	1708.8	1786.7	1899.9	1935.3	1949.4
65°	134.4	162.7	300.7	431.7	1249.0	1475.3	1560.2	1627.5	1719.5	1754.8	1761.9
67.5°	127.4	155.7	276.0	371.5	1111.0	1326.7	1390.4	1454.1	1524.9	1560.2	1563.8
70°	116.8	148.6	254.8	329.0	969.4	1156.9	1210.0	1277.2	1333.8	1351.5	1362.1
72.5°	109.7	138.0	240.6	297.2	824.3	994.2	1043.7	1082.7	1132.2	1149.9	1149.9
75°	99.1	123.8	226.5	265.4	675.7	813.7	856.2	895.1	934.0	941.1	930.5
77.5°	88.5	109.7	194.6	222.9	527.2	643.9	679.3	700.5	732.4	739.4	743.0
80°	74.3	95.5	152.1	173.3	382.1	474.1	498.9	516.6	544.9	544.9	551.9
82.5°	56.6	74.3	109.7	123.8	258.2	325.5	346.7	357.3	375.0	375.0	375.0
85°	35.3	46.0	70.8	81.4	155.7	198.2	212.3	215.8	229.9	233.5	233.5
87.5°	17.7	24.7	46.0	49.5	81.4	102.6	102.6	109.7	109.7	106.1	102.6
90°	8.3	14.9	21.5	23.2	36.5	54.3	63.1	56.1	42.0	31.5	31.5
92.5°	33.2	89.6	146.1	160.2	225.2	311.9	355.3	311.3	223.6	157.7	151.5
95°	79.7	183.0	286.4	312.1	554.2	877.1	1038.5	926.7	703.1	535.4	516.4
97.5°	137.8	229.0	320.1	342.9	746.6	1284.8	1554.0	1483.3	1342.0	1236.0	1199.9
100°	182.6	265.3	347.9	368.6	816.6	1413.8	1712.5	1717.7	1728.0	1735.8	1692.7
102.5°	220.8	298.0	375.0	394.3	848.6	1454.4	1757.4	1847.4	2027.4	2162.5	2125.6
105°	285.5	350.9	416.1	432.5	872.4	1459.1	1752.4	1954.2	2357.9	2660.5	2640.7
107.5°	352.0	412.8	473.7	489.0	876.9	1394.2	1652.8	1934.3	2497.3	2919.5	2924.3
110°	396.8	451.8	506.7	520.5	870.2	1336.6	1569.8	1884.5	2513.9	2985.9	3006.5



TEST NUMBER: P937227

CATALOG NUMBER: SQ4-FB-075U-100D-92765-1D-UNV-STD-W-12-3500K

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	440.8	493.2	545.6	558.7	870.6	1286.4	1494.2	1816.3	2460.5	2943.6	2975.3
115°	507.2	555.5	603.9	615.9	878.5	1228.7	1403.7	1714.0	2334.6	2800.0	2844.0
117.5°	572.8	616.7	660.5	671.5	894.9	1192.5	1341.4	1621.4	2181.5	2601.5	2650.4
120°	611.0	652.3	693.6	703.9	908.2	1180.4	1316.5	1572.4	2084.1	2467.9	2515.3
122.5°	648.3	690.0	731.7	742.1	927.3	1174.1	1297.4	1527.8	1988.7	2334.3	2381.1
125°	705.6	743.6	781.7	791.1	953.0	1168.8	1276.7	1472.5	1863.9	2157.5	2200.6
127.5°	752.1	790.5	828.9	838.4	978.8	1165.8	1259.3	1427.4	1763.5	2015.5	2051.9
130°	777.0	818.4	859.6	869.9	997.5	1167.5	1252.6	1402.2	1701.4	1925.8	1959.4
132.5°	802.7	844.1	885.3	895.7	1012.7	1168.8	1246.8	1380.7	1648.6	1849.5	1879.6
135°	840.9	878.5	916.2	925.6	1029.4	1167.7	1236.9	1349.0	1573.3	1741.6	1767.5
137.5°	879.9	917.2	954.5	963.8	1054.3	1174.9	1235.2	1330.0	1519.7	1661.9	1683.1
140°	912.3	946.5	980.9	989.5	1069.4	1176.1	1229.4	1311.3	1475.1	1598.0	1617.8
142.5°	937.2	968.9	1000.6	1008.6	1082.2	1180.3	1229.4	1301.4	1445.2	1553.2	1570.2
145°	975.4	1003.0	1030.7	1037.7	1098.8	1180.3	1221.1	1279.9	1397.7	1485.9	1498.9
147.5°	1013.6	1040.5	1067.5	1074.2	1123.2	1188.4	1221.1	1267.4	1360.0	1429.4	1440.2
150°	1038.5	1062.8	1087.2	1093.3	1135.9	1192.7	1221.1	1260.2	1338.4	1397.0	1405.7
152.5°	1064.2	1082.7	1101.0	1105.7	1144.2	1195.5	1221.1	1254.5	1321.3	1371.3	1377.8
155°	1102.4	1116.0	1129.7	1133.1	1162.5	1201.6	1221.1	1247.7	1300.8	1340.6	1345.0
157.5°	1130.6	1143.9	1157.2	1160.5	1180.7	1207.6	1221.1	1241.7	1283.1	1314.0	1317.1
160°	1149.7	1160.0	1170.4	1173.0	1189.1	1210.4	1221.1	1238.8	1274.2	1300.8	1302.6
162.5°	1168.8	1176.6	1184.2	1186.2	1197.8	1213.3	1221.1	1236.0	1265.9	1288.3	1290.0
165°	1189.6	1196.6	1203.5	1205.3	1210.6	1217.6	1221.1	1231.8	1253.1	1269.2	1271.0
167.5°	1208.6	1211.9	1215.3	1216.1	1220.6	1226.5	1229.4	1236.4	1250.4	1260.9	1261.6
170°	1221.1	1224.4	1227.8	1228.6	1228.9	1229.2	1229.4	1236.4	1250.4	1260.9	1260.9
172.5°	1227.7	1228.4	1229.2	1229.4	1229.4	1229.4	1229.4	1234.9	1246.0	1254.3	1253.7
175°	1236.9	1236.9	1236.9	1236.9	1234.4	1231.1	1229.4	1232.9	1239.9	1245.2	1245.2
177.5°	1236.9	1236.9	1236.9	1236.9	1234.9	1232.4	1231.1	1233.9	1239.4	1243.5	1242.8
180°	1236.9	1236.9	1236.9	1236.9	1236.9	1236.9	1236.9	1236.9	1236.9	1236.9	1236.9



TEST NUMBER: P937227

CATALOG NUMBER: SQ4-FB-075U-100D-92765-1D-UNV-STD-W-12-3500K

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	1100.3	1100.3
2.5°	1174.6	1167.5
5°	1510.8	1517.8
7.5°	2034.4	2030.8
10°	2529.7	2561.5
12.5°	2890.6	2897.6
15°	3109.9	3124.1
17.5°	3194.8	3198.3
20°	3198.3	3191.3
22.5°	3159.4	3152.4
25°	3113.5	3109.9
27.5°	3071.0	3074.5
30°	3053.3	3063.9
32.5°	3053.3	3071.0
35°	3060.3	3078.0
37.5°	3056.8	3078.0
40°	3042.7	3067.4
42.5°	3003.8	3021.4
45°	2943.6	2964.8
47.5°	2865.8	2879.9
50°	2766.7	2780.9
52.5°	2642.9	2646.4
55°	2494.2	2508.4
57.5°	2335.1	2338.6
60°	2158.2	2168.8
62.5°	1970.6	1970.6
65°	1772.6	1779.6
67.5°	1567.4	1585.0
70°	1358.6	1362.1
72.5°	1153.4	1153.4
75°	941.1	944.7
77.5°	739.4	739.4
80°	548.4	551.9
82.5°	378.6	385.6
85°	237.1	237.1
87.5°	109.7	99.1
90°	31.5	31.5
92.5°	126.4	101.3
95°	440.4	364.5
97.5°	1055.3	910.7
100°	1520.4	1348.1
102.5°	1978.0	1830.4
105°	2561.4	2482.0
107.5°	2943.5	2962.7
110°	3089.2	3171.8



TEST NUMBER: P937227

CATALOG NUMBER: SQ4-FB-075U-100D-92765-1D-UNV-STD-W-12-3500K

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	3102.2	3229.1
115°	3019.9	3195.9
117.5°	2845.5	3040.7
120°	2705.0	2894.6
122.5°	2568.1	2755.2
125°	2372.9	2545.1
127.5°	2197.3	2342.6
130°	2093.7	2228.1
132.5°	1999.8	2120.2
135°	1871.2	1974.8
137.5°	1767.9	1852.8
140°	1697.1	1776.4
142.5°	1638.5	1706.7
145°	1550.5	1602.1
147.5°	1482.9	1525.8
150°	1440.4	1475.1
152.5°	1404.1	1430.2
155°	1362.3	1379.6
157.5°	1329.3	1341.4
160°	1309.6	1316.5
162.5°	1296.6	1303.3
165°	1278.0	1285.0
167.5°	1264.7	1267.6
170°	1260.9	1260.9
172.5°	1251.1	1248.5
175°	1245.2	1245.2
177.5°	1239.8	1236.9
180°	1236.9	1236.9



TEST NUMBER: P937227
 CATALOG NUMBER: SQ4-FB-075U-100D-92765-1D-UNV-STD-W-12-3500K

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.40	6.32	6.34	7.28	8.52	18.59	19.51	19.53	20.47	21.71
	3H	6.11	6.94	7.06	7.90	9.17	20.44	21.27	21.39	22.23	23.50
	4H	6.41	7.19	7.37	8.16	9.44	21.09	21.87	22.06	22.85	24.12
	6H	6.67	7.39	7.64	8.36	9.65	21.53	22.25	22.51	23.23	24.52
	8H	6.74	7.42	7.72	8.42	9.70	21.66	22.34	22.64	23.34	24.63
	12H	6.76	7.41	7.74	8.40	9.71	21.73	22.38	22.72	23.37	24.69
4H	2H	12.63	13.41	13.60	14.38	15.66	18.87	19.65	19.84	20.63	21.90
	3H	14.20	14.86	15.18	15.86	17.15	20.93	21.58	21.91	22.58	23.88
	4H	14.30	14.90	15.29	15.89	17.21	21.70	22.30	22.69	23.30	24.61
	6H	14.31	14.83	15.31	15.85	17.16	22.25	22.77	23.25	23.79	25.10
	8H	14.29	14.78	15.29	15.79	17.12	22.42	22.90	23.42	23.91	25.24
	12H	14.25	14.69	15.27	15.72	17.05	22.52	22.95	23.54	23.98	25.31
8H	4H	15.75	16.24	16.75	17.25	18.58	21.77	22.25	22.77	23.26	24.59
	6H	16.00	16.40	17.02	17.45	18.78	22.40	22.80	23.43	23.86	25.18
	8H	16.02	16.37	17.05	17.41	18.76	22.63	22.98	23.66	24.02	25.37
	12H	15.99	16.30	17.03	17.33	18.72	22.78	23.09	23.82	24.12	25.51
12H	4H	15.90	16.34	16.92	17.37	18.70	21.72	22.16	22.74	23.19	24.52
	6H	16.26	16.61	17.29	17.65	19.00	22.39	22.74	23.42	23.78	25.13
	8H	16.33	16.64	17.37	17.68	19.07	22.62	22.93	23.66	23.97	25.36