

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P937247

Luminaire Tested: SQ4-FB-075U-100D-92765-1D-UNV-STD-W-8-5000K

Issue Date: 12/17/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P937247  
REPORT IS A COMBINATION OF REPORTS P933519 AND P933786  
Test Lab: INNOVATION CENTER  
Issue Date: 12/17/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ4-FB-075U-100D-92765-1D-UNV-STD-W-8-5000K  
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 11543.6 lumens  
Efficiency: N/A  
Efficacy: 112.7 lumens/watt  
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33  
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 8' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 102.4  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P937247  
CATALOG NUMBER: SQ4-FB-075U-100D-92765-1D-UNV-STD-W-8-5000K

### Luminous Intensity Polar Plot

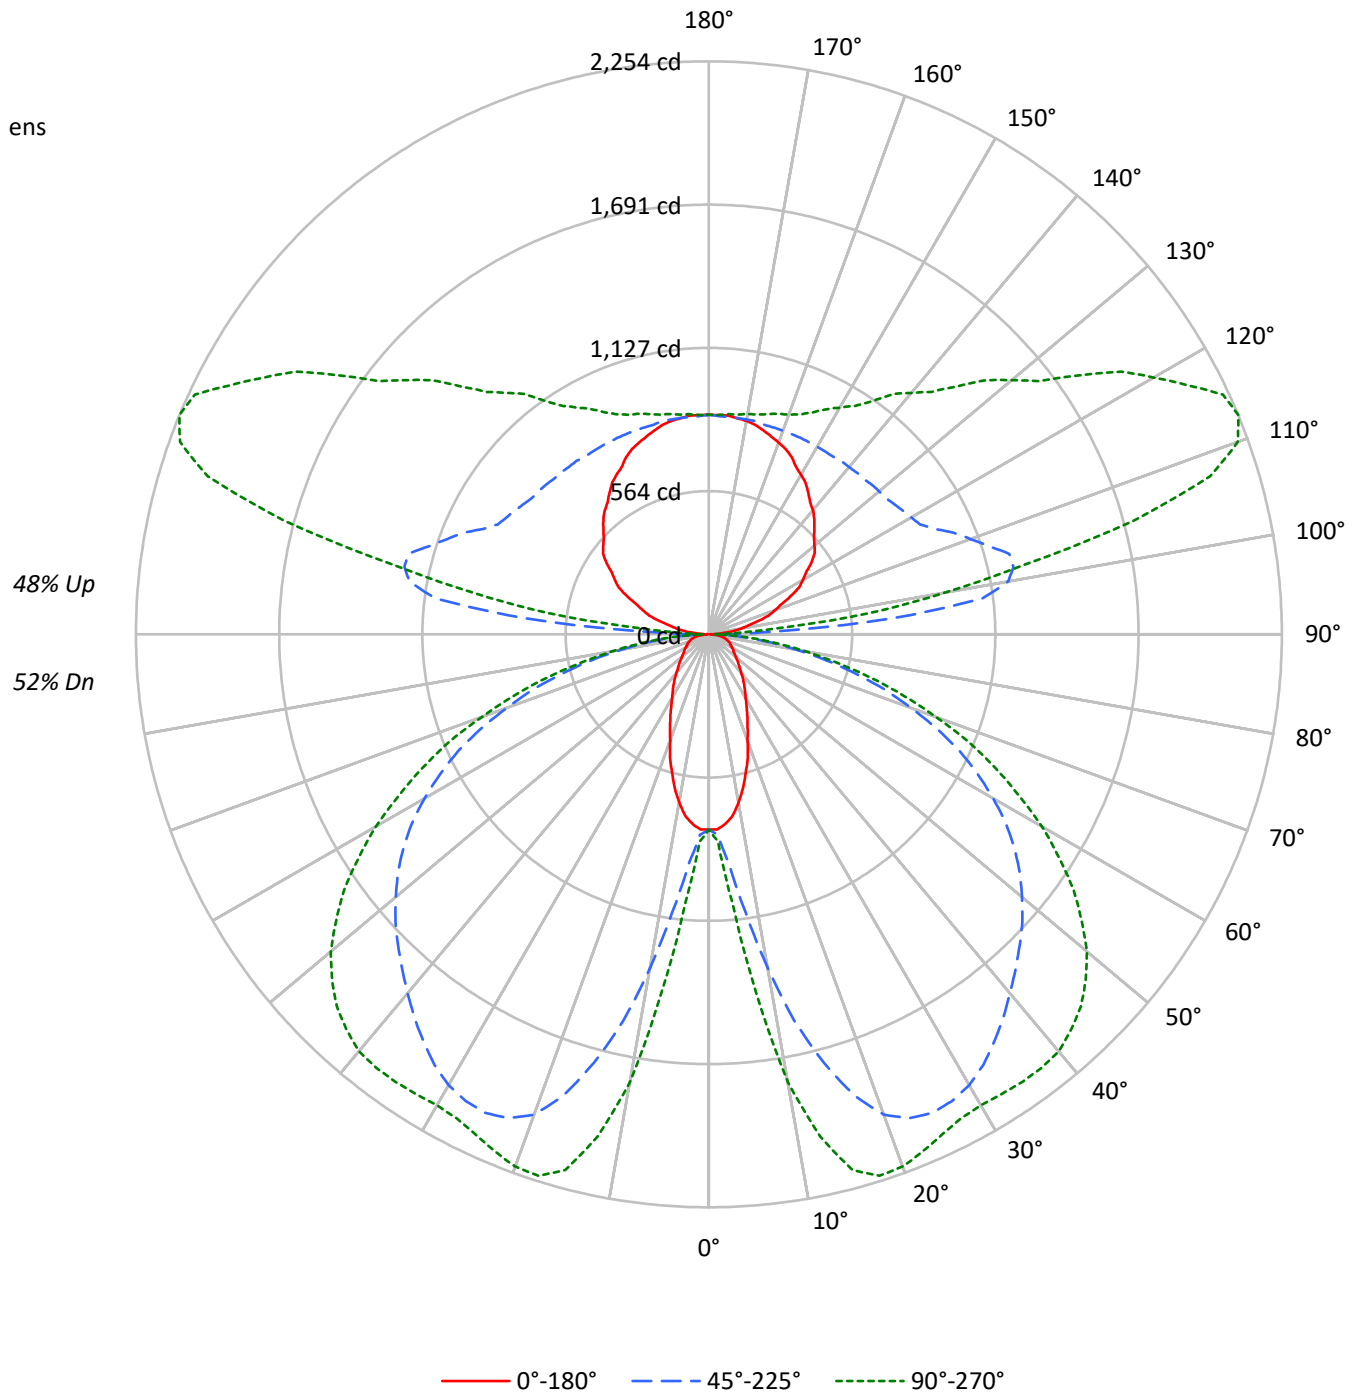



TEST NUMBER: P937247

CATALOG NUMBER: SQ4-FB-075U-100D-92765-1D-UNV-STD-W-8-5000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20													
RC	80					70					50					30					10					0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0				
RCR																																		
0	108	108	108	108	99	99	99	99	84	84	84	70	70	70	58	58	58	52																
1	98	93	89	85	90	86	82	79	73	70	68	61	59	57	50	49	47	42																
2	88	80	74	69	81	74	69	64	63	59	55	53	50	47	43	41	39	34																
3	80	70	62	56	74	65	58	53	55	50	46	46	42	39	38	35	32	28																
4	73	62	53	47	67	57	50	44	49	43	38	41	36	33	33	30	27	24																
5	67	55	46	40	61	51	43	37	43	37	33	36	32	28	30	26	23	20																
6	61	49	40	34	56	45	38	32	39	33	28	32	28	24	27	23	20	17																
7	56	44	35	30	52	41	33	28	35	29	24	29	25	21	24	20	18	15																
8	52	39	31	26	48	37	29	24	31	26	21	27	22	19	22	18	16	13																
9	49	36	28	23	45	33	26	22	29	23	19	24	20	16	20	17	14	12																
10	45	33	25	20	42	31	24	19	26	21	17	22	18	15	19	15	12	10																

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3564	3564	3564
5°	3482	4119	4791
10°	3158	6005	7943
15°	2684	7845	9590
20°	2185	9091	9774
25°	1823	9514	9575
30°	1537	9574	9558
35°	1359	9415	9804
40°	1184	9208	10060
45°	1073	9057	10100
50°	984	8921	9932
55°	942	8721	9492
60°	965	8339	8797
65°	1003	7756	7842
70°	1069	6764	6625
75°	1185	5514	5170
80°	1295	3825	3484
85°	1150	2029	1783

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 45°  
 Luminance: 10100 cd/sqm



TEST NUMBER: P937247

CATALOG NUMBER: SQ4-FB-075U-100D-92765-1D-UNV-STD-W-8-5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	99.4	0.9
10°-20°	440.4	3.8
20°-30°	770.4	6.7
30°-40°	991.7	8.6
40°-50°	1107.7	9.6
50°-60°	1060.9	9.2
60°-70°	840.8	7.3
70°-80°	494.4	4.3
80°-90°	140.7	1.2
90°-100°	420.9	3.6
100°-110°	1106.5	9.6
110°-120°	1147.4	9.9
120°-130°	920.3	8.0
130°-140°	722.1	6.3
140°-150°	554.3	4.8
150°-160°	399.2	3.5
160°-170°	244.2	2.1
170°-180°	82.5	0.7
0°-30°	1310.1	11.3
0°-40°	2301.8	19.9
0°-60°	4470.4	38.7
0°-90°	5946.2	51.5
90°-120°	2674.8	23.2
90°-150°	4871.6	42.2
90°-180°	5597.0	48.5
0°-180°	11543.6	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	768	768	768	768	768	
5°	748	803	904	1023	1060	69
15°	561	1035	1744	2114	2181	156
25°	358	1173	2077	2169	2171	165
35°	242	1122	1956	2068	2149	151
45°	166	894	1729	1981	2070	128
55°	118	568	1467	1704	1751	108
65°	94	301	1089	1225	1242	93
75°	69	185	598	657	660	72
85°	25	57	148	163	166	26
90°	6	16	44	22	22	6
95°	56	218	725	374	254	62
105°	199	302	1223	1857	1733	211
115°	354	430	980	1955	2231	350
125°	493	552	891	1506	1777	437
135°	587	646	864	1216	1379	454
145°	681	724	852	1037	1118	427
155°	770	791	852	936	963	354
165°	830	841	852	886	897	234
175°	864	864	858	869	869	82
180°	864	864	864	864	864	



TEST NUMBER: P937247

CATALOG NUMBER: SQ4-FB-075U-100D-92765-1D-UNV-STD-W-8-5000K

**CANDELA DISTRIBUTION (FULL):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	768.2	768.2	768.2	768.2	768.2	768.2	768.2	768.2	768.2	768.2	768.2
2.5°	768.2	768.2	773.2	775.6	780.6	783.0	788.0	792.9	807.8	810.2	815.2
5°	748.4	758.3	790.5	802.8	837.4	884.3	904.0	936.2	1002.8	1022.7	1035.0
7.5°	718.8	741.0	820.1	839.8	926.3	1049.8	1101.6	1170.8	1277.1	1329.0	1370.9
10°	671.9	718.8	859.6	906.6	1047.3	1235.0	1331.4	1427.8	1588.3	1659.9	1687.1
12.5°	620.0	696.5	901.6	965.8	1168.4	1442.5	1558.6	1664.9	1847.6	1944.0	1958.8
15°	560.7	664.5	941.2	1035.0	1296.8	1615.5	1743.9	1874.8	2045.2	2114.4	2131.7
17.5°	508.9	639.8	978.2	1077.0	1395.6	1771.1	1902.0	2010.6	2149.0	2195.9	2208.3
20°	444.6	600.3	1002.8	1131.3	1499.4	1884.7	2010.6	2094.7	2188.5	2218.2	2223.1
22.5°	397.7	558.2	1017.7	1151.1	1568.5	1953.9	2060.1	2126.7	2191.0	2200.9	2203.4
25°	358.2	511.3	1015.2	1173.3	1627.8	1995.9	2077.4	2126.7	2163.8	2168.8	2168.8
27.5°	321.1	459.4	1005.4	1178.3	1672.3	2005.8	2070.0	2104.6	2121.9	2131.7	2131.7
30°	289.0	410.1	980.6	1168.4	1692.0	1995.9	2047.8	2065.0	2082.3	2097.1	2104.6
32.5°	264.3	363.1	943.6	1148.6	1694.5	1971.2	2008.2	2018.1	2042.8	2077.4	2089.7
35°	242.1	316.2	901.6	1121.5	1679.7	1931.7	1956.3	1966.2	2015.6	2067.5	2084.8
37.5°	219.8	281.6	847.2	1074.5	1657.4	1884.7	1902.0	1919.3	1995.9	2057.6	2077.4
40°	197.6	252.0	783.0	1022.7	1622.8	1827.9	1842.7	1869.9	1971.2	2042.8	2062.5
42.5°	180.3	227.2	713.8	968.3	1578.4	1763.7	1785.9	1825.4	1941.5	2018.1	2040.4
45°	165.5	202.6	639.8	894.1	1521.6	1697.0	1729.1	1783.4	1906.9	1981.0	2000.8
47.5°	150.7	185.3	563.2	817.6	1459.8	1630.3	1672.3	1734.1	1860.0	1931.7	1949.0
50°	138.3	168.0	486.6	736.1	1393.2	1558.6	1608.1	1672.3	1800.7	1867.4	1889.6
52.5°	128.4	153.1	415.0	654.6	1316.5	1484.5	1541.3	1608.1	1729.1	1793.3	1808.1
55°	118.5	140.8	353.2	568.1	1237.6	1405.5	1467.2	1531.5	1650.0	1704.3	1714.3
57.5°	113.7	131.0	301.3	486.6	1153.5	1316.5	1385.7	1445.1	1556.2	1598.2	1608.1
60°	106.2	123.5	261.8	417.4	1062.2	1232.6	1291.9	1351.1	1445.1	1479.6	1487.0
62.5°	98.8	118.5	232.2	350.8	968.3	1133.8	1193.1	1247.5	1326.4	1351.1	1361.0
65°	93.8	113.7	209.9	301.3	872.0	1030.0	1089.3	1136.2	1200.4	1225.2	1230.2
67.5°	88.9	108.7	192.6	259.4	775.6	926.3	970.8	1015.2	1064.6	1089.3	1091.8
70°	81.5	103.8	177.9	229.8	676.8	807.8	844.8	891.7	931.2	943.6	951.0
72.5°	76.6	96.4	168.0	207.5	575.5	694.1	728.7	755.9	790.5	802.8	802.8
75°	69.2	86.5	158.1	185.3	471.8	568.1	597.7	624.9	652.1	657.1	649.6
77.5°	61.8	76.6	135.8	155.6	368.1	449.6	474.3	489.0	511.3	516.2	518.8
80°	51.9	66.7	106.2	121.0	266.8	331.0	348.3	360.6	380.4	380.4	385.4
82.5°	39.5	51.9	76.6	86.5	180.3	227.2	242.1	249.5	261.8	261.8	261.8
85°	24.7	32.2	49.4	56.8	108.7	138.3	148.2	150.7	160.6	163.0	163.0
87.5°	12.3	17.3	32.2	34.6	56.8	71.6	71.6	76.6	76.6	74.1	71.6
90°	5.8	10.5	15.1	16.3	25.5	37.9	44.0	39.2	29.3	22.1	22.1
92.5°	23.2	62.6	102.1	111.9	157.3	217.8	248.1	217.4	156.1	110.1	105.7
95°	55.6	127.8	199.8	217.9	386.9	612.2	725.0	646.9	490.8	373.8	360.5
97.5°	96.2	159.8	223.5	239.4	521.2	896.9	1084.8	1035.5	936.9	862.9	837.7
100°	127.5	185.2	242.9	257.3	570.1	987.0	1195.5	1199.1	1206.3	1211.8	1181.7
102.5°	154.1	208.0	261.8	275.3	592.4	1015.4	1226.8	1289.6	1415.3	1509.6	1483.8
105°	199.4	245.0	290.5	301.9	609.1	1018.5	1223.3	1364.2	1645.9	1857.3	1843.4
107.5°	245.7	288.3	330.7	341.4	612.1	973.2	1153.8	1350.3	1743.3	2038.1	2041.5
110°	277.0	315.4	353.7	363.3	607.5	933.0	1095.8	1315.5	1754.9	2084.5	2098.9



TEST NUMBER: P937247

CATALOG NUMBER: SQ4-FB-075U-100D-92765-1D-UNV-STD-W-8-5000K

**CANDELA DISTRIBUTION (continued):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	307.7	344.3	380.8	390.0	607.7	898.0	1043.1	1268.0	1717.7	2055.0	2077.1
115°	354.1	387.8	421.6	430.0	613.3	857.7	979.9	1196.5	1629.8	1954.7	1985.4
117.5°	399.9	430.5	461.2	468.8	624.8	832.5	936.5	1131.9	1522.9	1816.1	1850.2
120°	426.5	455.3	484.2	491.4	633.9	824.0	919.1	1097.7	1455.0	1722.9	1755.9
122.5°	452.6	481.7	510.8	518.1	647.3	819.6	905.7	1066.6	1388.3	1629.6	1662.2
125°	492.6	519.1	545.6	552.2	665.2	815.9	891.2	1027.9	1301.1	1506.1	1536.2
127.5°	525.0	551.9	578.6	585.3	683.3	813.8	879.1	996.4	1231.0	1407.0	1432.3
130°	542.4	571.2	600.1	607.3	696.4	815.2	874.5	978.9	1187.8	1344.5	1367.9
132.5°	560.4	589.2	618.1	625.3	707.0	815.9	870.4	963.9	1150.9	1291.1	1312.1
135°	587.0	613.3	639.6	646.2	718.6	815.2	863.5	941.8	1098.4	1215.8	1233.9
137.5°	614.3	640.3	666.3	672.8	736.0	820.2	862.3	928.4	1060.9	1160.2	1174.9
140°	636.9	660.8	684.8	690.7	746.5	821.0	858.2	915.5	1029.8	1115.6	1129.4
142.5°	654.3	676.4	698.6	704.1	755.5	824.0	858.2	908.4	1008.9	1084.3	1096.1
145°	680.9	700.3	719.5	724.4	767.1	824.0	852.5	893.6	975.7	1037.3	1046.3
147.5°	707.6	726.4	745.2	749.9	784.1	829.6	852.5	884.8	949.4	997.9	1005.4
150°	725.0	742.0	759.0	763.2	792.9	832.6	852.5	879.7	934.3	975.3	981.3
152.5°	742.9	755.8	768.7	771.9	798.7	834.5	852.5	875.7	922.4	957.3	961.9
155°	769.5	779.1	788.6	791.0	811.5	838.8	852.5	871.0	908.1	935.9	938.9
157.5°	789.3	798.5	807.8	810.1	824.2	843.0	852.5	866.8	895.7	917.3	919.5
160°	802.6	809.8	817.0	818.8	830.0	845.0	852.5	864.8	889.6	908.1	909.3
162.5°	815.9	821.3	826.7	828.1	836.3	847.0	852.5	862.9	883.8	899.4	900.5
165°	830.4	835.3	840.2	841.4	845.1	850.0	852.5	859.9	874.9	886.1	887.3
167.5°	843.8	846.1	848.4	849.0	852.1	856.2	858.2	863.1	872.9	880.3	880.8
170°	852.5	854.8	857.1	857.7	857.9	858.2	858.2	863.1	872.9	880.3	880.3
172.5°	857.1	857.6	858.2	858.2	858.2	858.2	858.2	862.1	869.8	875.6	875.2
175°	863.5	863.5	863.5	863.5	861.7	859.4	858.2	860.7	865.6	869.3	869.3
177.5°	863.5	863.5	863.5	863.5	862.1	860.3	859.4	861.3	865.2	868.1	867.6
180°	863.5	863.5	863.5	863.5	863.5	863.5	863.5	863.5	863.5	863.5	863.5



TEST NUMBER: P937247

CATALOG NUMBER: SQ4-FB-075U-100D-92765-1D-UNV-STD-W-8-5000K

**CANDELA DISTRIBUTION (continued):**

	80°	90°
0°	768.2	768.2
2.5°	820.1	815.2
5°	1054.7	1059.7
7.5°	1420.3	1417.9
10°	1766.1	1788.4
12.5°	2018.1	2023.1
15°	2171.2	2181.1
17.5°	2230.5	2233.0
20°	2233.0	2228.1
22.5°	2205.8	2200.9
25°	2173.8	2171.2
27.5°	2144.0	2146.6
30°	2131.7	2139.2
32.5°	2131.7	2144.0
35°	2136.6	2149.0
37.5°	2134.2	2149.0
40°	2124.3	2141.6
42.5°	2097.1	2109.4
45°	2055.1	2070.0
47.5°	2000.8	2010.6
50°	1931.7	1941.5
52.5°	1845.2	1847.6
55°	1741.5	1751.4
57.5°	1630.3	1632.7
60°	1506.7	1514.2
62.5°	1375.9	1375.9
65°	1237.6	1242.5
67.5°	1094.3	1106.6
70°	948.5	951.0
72.5°	805.2	805.2
75°	657.1	659.5
77.5°	516.2	516.2
80°	382.9	385.4
82.5°	264.3	269.3
85°	165.5	165.5
87.5°	76.6	69.2
90°	22.1	22.1
92.5°	88.2	70.7
95°	307.5	254.4
97.5°	736.6	635.7
100°	1061.5	941.2
102.5°	1380.8	1277.8
105°	1788.0	1732.7
107.5°	2054.9	2068.2
110°	2156.6	2214.3





TEST NUMBER: P937247

CATALOG NUMBER: SQ4-FB-075U-100D-92765-1D-UNV-STD-W-8-5000K

**CANDELA DISTRIBUTION (continued):**

	80°	90°
112.5°	2165.6	2254.2
115°	2108.2	2231.0
117.5°	1986.4	2122.7
120°	1888.4	2020.7
122.5°	1792.8	1923.3
125°	1656.5	1776.8
127.5°	1533.9	1635.4
130°	1461.6	1555.4
132.5°	1396.1	1480.0
135°	1306.3	1378.6
137.5°	1234.2	1293.4
140°	1184.8	1240.2
142.5°	1143.8	1191.5
145°	1082.4	1118.5
147.5°	1035.2	1065.1
150°	1005.6	1029.8
152.5°	980.1	998.5
155°	951.1	963.1
157.5°	928.0	936.5
160°	914.2	919.1
162.5°	905.2	909.8
165°	892.2	897.0
167.5°	882.8	884.9
170°	880.3	880.3
172.5°	873.4	871.6
175°	869.3	869.3
177.5°	865.5	863.5
180°	863.5	863.5



TEST NUMBER: P937247

CATALOG NUMBER: SQ4-FB-075U-100D-92765-1D-UNV-STD-W-8-5000K

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.56	6.47	6.49	7.43	8.68	18.74	19.65	19.67	20.61	21.86
	3H	6.27	7.09	7.21	8.06	9.33	20.58	21.40	21.53	22.37	23.64
	4H	6.57	7.35	7.53	8.32	9.60	21.23	22.01	22.19	22.98	24.26
	6H	6.82	7.54	7.80	8.52	9.81	21.66	22.38	22.63	23.36	24.65
	8H	6.89	7.58	7.87	8.57	9.86	21.78	22.47	22.76	23.46	24.75
	12H	6.91	7.56	7.90	8.55	9.87	21.85	22.51	22.84	23.50	24.81
4H	2H	12.78	13.56	13.75	14.53	15.81	19.02	19.80	19.98	20.77	22.05
	3H	14.35	15.01	15.33	16.01	17.30	21.07	21.72	22.05	22.72	24.01
	4H	14.45	15.05	15.44	16.04	17.36	21.84	22.44	22.82	23.43	24.75
	6H	14.46	14.98	15.46	16.00	17.31	22.38	22.90	23.38	23.92	25.23
	8H	14.44	14.92	15.44	15.94	17.27	22.54	23.03	23.54	24.04	25.37
	12H	14.40	14.84	15.42	15.87	17.20	22.64	23.08	23.66	24.10	25.44
8H	4H	15.90	16.38	16.90	17.39	18.72	21.90	22.39	22.90	23.40	24.73
	6H	16.14	16.54	17.17	17.60	18.92	22.53	22.93	23.56	23.99	25.31
	8H	16.16	16.52	17.20	17.56	18.90	22.76	23.11	23.79	24.15	25.49
	12H	16.13	16.44	17.17	17.48	18.87	22.90	23.21	23.94	24.25	25.64
12H	4H	16.05	16.48	17.07	17.51	18.84	21.86	22.29	22.88	23.32	24.66
	6H	16.40	16.76	17.44	17.80	19.14	22.52	22.87	23.55	23.91	25.26
	8H	16.48	16.79	17.51	17.82	19.21	22.75	23.06	23.79	24.10	25.48