

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P938143

Luminaire Tested: SQ4-FB-125U-125D-92765-1D-UNV-STD-W-8-2700K

Issue Date: 12/17/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P938143  
REPORT IS A COMBINATION OF REPORTS P933616 AND P933786  
Test Lab: INNOVATION CENTER  
Issue Date: 12/17/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ4-FB-125U-125D-92765-1D-UNV-STD-W-8-2700K  
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 15503.3 lumens  
Efficiency: N/A  
Efficacy: 103.1 lumens/watt  
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33  
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 8' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 150.4  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P938143  
CATALOG NUMBER: SQ4-FB-125U-125D-92765-1D-UNV-STD-W-8-2700K

### Luminous Intensity Polar Plot

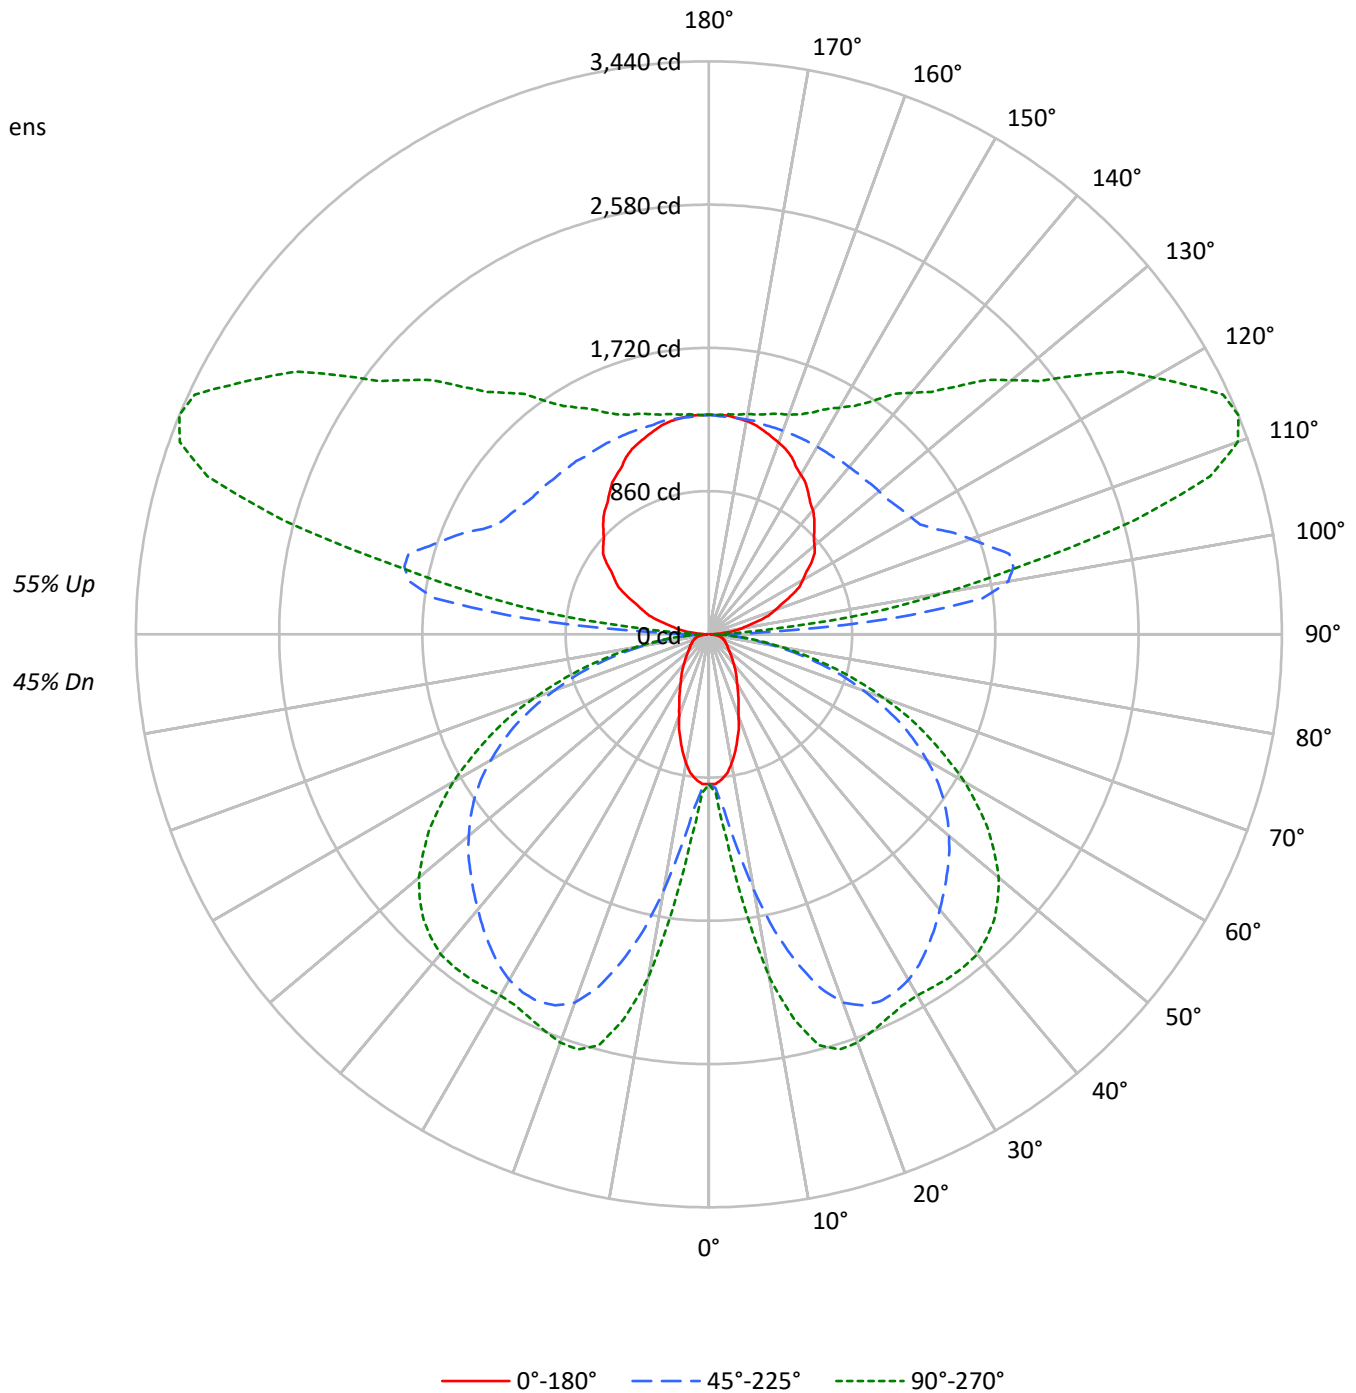



TEST NUMBER: P938143

CATALOG NUMBER: SQ4-FB-125U-125D-92765-1D-UNV-STD-W-8-2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	51	51	51	45	45	45	45
1	96	92	88	84	88	84	81	77	70	67	65	57	55	53	45	44	42	37	37	37	37
2	87	79	73	68	79	73	67	63	61	56	53	49	46	44	39	37	35	30	30	30	30
3	79	69	62	56	72	64	57	52	53	48	44	43	39	36	34	31	29	25	25	25	25
4	72	61	53	47	66	56	49	43	47	41	37	38	34	31	30	27	25	21	21	21	21
5	66	54	46	39	60	50	42	37	41	36	31	34	29	26	27	23	21	18	18	18	18
6	60	48	40	34	55	44	37	31	37	31	27	30	26	23	24	21	18	15	15	15	15
7	56	43	35	29	51	40	32	27	33	28	23	27	23	20	22	18	16	13	13	13	13
8	52	39	31	26	47	36	29	24	30	25	21	25	20	17	20	16	14	12	12	12	12
9	48	35	28	23	44	33	26	21	27	22	18	23	18	15	18	15	12	10	10	10	10
10	45	32	25	20	41	30	23	19	25	20	16	21	17	14	17	13	11	9	9	9	9

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	4171	4171	4171
5°	4075	4821	5607
10°	3696	7028	9295
15°	3141	9181	11224
20°	2557	10640	11439
25°	2134	11135	11207
30°	1799	11204	11185
35°	1591	11019	11475
40°	1386	10777	11774
45°	1255	10600	11820
50°	1151	10440	11624
55°	1103	10207	11109
60°	1129	9759	10295
65°	1174	9078	9178
70°	1251	7916	7753
75°	1387	6455	6051
80°	1514	4476	4077
85°	1346	2376	2087

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 45°  
 Luminance: 11820 cd/sqm



TEST NUMBER: P938143

CATALOG NUMBER: SQ4-FB-125U-125D-92765-1D-UNV-STD-W-8-2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	116.3	0.8
10°-20°	515.4	3.3
20°-30°	901.6	5.8
30°-40°	1160.6	7.5
40°-50°	1296.3	8.4
50°-60°	1241.6	8.0
60°-70°	984.0	6.3
70°-80°	578.6	3.7
80°-90°	165.8	1.1
90°-100°	642.4	4.1
100°-110°	1688.9	10.9
110°-120°	1751.2	11.3
120°-130°	1404.7	9.1
130°-140°	1102.1	7.1
140°-150°	845.9	5.5
150°-160°	609.2	3.9
160°-170°	372.8	2.4
170°-180°	125.9	0.8
0°-30°	1533.3	9.9
0°-40°	2693.9	17.4
0°-60°	5231.8	33.7
0°-90°	6960.2	44.9
90°-120°	4082.4	26.3
90°-150°	7435.2	48.0
90°-180°	8543.0	55.1
0°-180°	15503.3	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	899	899	899	899	899	
5°	876	940	1058	1197	1240	81
15°	656	1211	2041	2475	2553	183
25°	419	1373	2431	2538	2541	193
35°	283	1312	2290	2420	2515	177
45°	194	1046	2024	2318	2423	150
55°	139	665	1717	1995	2050	126
65°	110	353	1275	1434	1454	109
75°	81	217	700	769	772	85
85°	29	66	174	191	194	31
90°	9	25	67	34	34	9
95°	85	333	1106	570	388	94
105°	304	461	1867	2835	2645	323
115°	540	656	1496	2983	3405	534
125°	752	843	1360	2299	2712	667
135°	896	986	1318	1856	2104	693
145°	1039	1106	1301	1583	1707	651
155°	1175	1207	1301	1428	1470	540
165°	1267	1284	1301	1352	1369	358
175°	1318	1318	1310	1327	1327	125
180°	1318	1318	1318	1318	1318	



TEST NUMBER: P938143

CATALOG NUMBER: SQ4-FB-125U-125D-92765-1D-UNV-STD-W-8-2700K

**CANDELA DISTRIBUTION (FULL):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	899.1	899.1	899.1	899.1	899.1	899.1	899.1	899.1	899.1	899.1	899.1
2.5°	899.1	899.1	904.9	907.8	913.5	916.4	922.2	928.0	945.3	948.3	954.0
5°	875.9	887.5	925.1	939.5	980.0	1034.9	1058.1	1095.7	1173.7	1196.8	1211.2
7.5°	841.2	867.3	959.8	982.9	1084.1	1228.7	1289.3	1370.3	1494.6	1555.3	1604.5
10°	786.3	841.2	1006.0	1060.9	1225.8	1445.4	1558.2	1670.9	1858.8	1942.7	1974.5
12.5°	725.6	815.3	1055.2	1130.4	1367.4	1688.3	1824.2	1948.4	2162.4	2275.1	2292.5
15°	656.2	777.7	1101.4	1211.2	1517.7	1890.6	2040.9	2194.2	2393.7	2474.6	2494.8
17.5°	595.5	748.7	1144.8	1260.4	1633.3	2072.8	2225.9	2353.2	2515.1	2570.0	2584.4
20°	520.3	702.5	1173.7	1324.0	1754.8	2205.8	2353.2	2451.4	2561.4	2596.0	2601.8
22.5°	465.4	653.3	1191.1	1347.1	1835.7	2286.7	2411.0	2489.0	2564.2	2575.8	2578.7
25°	419.2	598.4	1188.2	1373.2	1905.1	2335.9	2431.3	2489.0	2532.4	2538.2	2538.2
27.5°	375.8	537.7	1176.6	1379.0	1957.1	2347.4	2422.6	2463.0	2483.3	2494.8	2494.8
30°	338.2	479.8	1147.7	1367.4	1980.3	2335.9	2396.5	2416.8	2437.0	2454.3	2463.0
32.5°	309.4	424.9	1104.3	1344.2	1983.1	2306.9	2350.3	2361.8	2390.8	2431.3	2445.7
35°	283.3	370.0	1055.2	1312.5	1965.8	2260.7	2289.6	2301.1	2358.9	2419.7	2439.9
37.5°	257.3	329.5	991.6	1257.5	1939.8	2205.8	2225.9	2246.2	2335.9	2408.1	2431.3
40°	231.3	294.8	916.4	1196.8	1899.3	2139.2	2156.6	2188.4	2306.9	2390.8	2413.9
42.5°	211.1	266.0	835.5	1133.3	1847.3	2064.1	2090.1	2136.3	2272.2	2361.8	2387.9
45°	193.7	237.0	748.7	1046.5	1780.8	1986.0	2023.6	2087.2	2231.8	2318.5	2341.6
47.5°	176.4	216.8	659.1	956.9	1708.5	1908.0	1957.1	2029.4	2176.8	2260.7	2280.9
50°	161.9	196.6	569.5	861.5	1630.4	1824.2	1882.0	1957.1	2107.5	2185.5	2211.5
52.5°	150.3	179.2	485.7	766.1	1540.8	1737.4	1803.9	1882.0	2023.6	2098.8	2116.1
55°	138.8	164.8	413.4	664.9	1448.3	1644.9	1717.2	1792.4	1931.1	1994.7	2006.3
57.5°	133.0	153.2	352.7	569.5	1350.0	1540.8	1621.8	1691.2	1821.3	1870.4	1882.0
60°	124.3	144.5	306.5	488.6	1243.1	1442.5	1511.9	1581.3	1691.2	1731.7	1740.3
62.5°	115.6	138.8	271.8	410.5	1133.3	1326.9	1396.3	1459.9	1552.4	1581.3	1592.9
65°	109.8	133.0	245.7	352.7	1020.5	1205.5	1274.9	1329.8	1405.0	1433.9	1439.6
67.5°	104.0	127.2	225.5	303.6	907.8	1084.1	1136.1	1188.2	1246.0	1274.9	1277.8
70°	95.4	121.5	208.2	268.9	792.1	945.3	988.7	1043.6	1089.9	1104.3	1113.0
72.5°	89.6	112.7	196.6	242.8	673.6	812.4	852.8	884.6	925.1	939.5	939.5
75°	81.0	101.2	185.0	216.8	552.2	664.9	699.6	731.4	763.2	769.0	760.3
77.5°	72.3	89.6	159.0	182.1	430.7	526.1	555.0	572.4	598.4	604.2	607.1
80°	60.7	78.1	124.3	141.6	312.2	387.3	407.6	422.1	445.2	445.2	451.0
82.5°	46.3	60.7	89.6	101.2	211.1	266.0	283.3	291.9	306.5	306.5	306.5
85°	28.9	37.6	57.8	66.5	127.2	161.9	173.5	176.4	187.9	190.8	190.8
87.5°	14.4	20.2	37.6	40.5	66.5	83.9	83.9	89.6	89.6	86.7	83.9
90°	8.9	16.0	23.0	24.8	38.9	57.8	67.2	59.7	44.8	33.6	33.6
92.5°	35.4	95.5	155.7	170.7	240.0	332.3	378.5	331.7	238.2	168.0	161.3
95°	84.9	195.0	305.1	332.6	590.5	934.5	1106.4	987.4	749.2	570.5	550.2
97.5°	146.8	243.9	341.1	365.3	795.4	1369.0	1655.7	1580.5	1429.9	1317.0	1278.5
100°	194.6	282.6	370.7	392.7	870.0	1506.4	1824.7	1830.1	1841.2	1849.4	1803.6
102.5°	235.2	317.4	399.6	420.1	904.3	1549.7	1872.4	1968.3	2160.2	2304.0	2264.7
105°	304.2	373.9	443.4	460.8	929.5	1554.6	1867.1	2082.1	2512.2	2834.7	2813.6
107.5°	375.0	439.9	504.7	520.9	934.2	1485.4	1761.0	2060.9	2660.8	3110.6	3115.8
110°	422.8	481.4	540.0	554.6	927.2	1424.1	1672.6	2007.9	2678.5	3181.4	3203.4



TEST NUMBER: P938143

CATALOG NUMBER: SQ4-FB-125U-125D-92765-1D-UNV-STD-W-8-2700K

**CANDELA DISTRIBUTION (continued):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	469.7	525.5	581.3	595.2	927.5	1370.5	1592.0	1935.2	2621.5	3136.3	3170.1
115°	540.4	591.9	643.3	656.2	936.0	1309.1	1495.7	1826.2	2487.4	2983.3	3030.2
117.5°	610.3	657.1	703.8	715.5	953.5	1270.7	1429.3	1727.6	2324.3	2771.9	2823.9
120°	650.9	695.0	739.0	750.0	967.6	1257.7	1402.7	1675.4	2220.6	2629.5	2680.0
122.5°	690.7	735.1	779.6	790.7	987.9	1250.9	1382.4	1627.9	2118.9	2487.1	2536.9
125°	751.8	792.3	832.8	842.9	1015.3	1245.3	1360.3	1568.9	1985.9	2298.7	2344.6
127.5°	801.3	842.3	883.1	893.3	1042.8	1242.1	1341.7	1520.8	1878.9	2147.4	2186.1
130°	827.8	871.9	915.9	926.9	1062.8	1244.0	1334.7	1494.0	1812.9	2052.0	2087.7
132.5°	855.2	899.3	943.3	954.3	1079.0	1245.3	1328.4	1471.2	1756.5	1970.6	2002.6
135°	896.0	936.0	976.2	986.2	1096.7	1244.1	1317.8	1437.3	1676.3	1855.6	1883.2
137.5°	937.5	977.2	1016.9	1026.8	1123.3	1251.8	1316.0	1417.1	1619.2	1770.7	1793.3
140°	972.0	1008.6	1045.1	1054.3	1139.5	1253.1	1309.9	1397.2	1571.7	1702.6	1723.7
142.5°	998.6	1032.4	1066.1	1074.6	1153.0	1257.6	1309.9	1386.5	1539.8	1654.8	1673.0
145°	1039.2	1068.7	1098.2	1105.6	1170.8	1257.6	1301.0	1363.7	1489.2	1583.2	1597.0
147.5°	1080.0	1108.7	1137.4	1144.5	1196.7	1266.2	1301.0	1350.4	1449.0	1523.1	1534.4
150°	1106.4	1132.4	1158.4	1164.9	1210.2	1270.8	1301.0	1342.7	1426.1	1488.6	1497.8
152.5°	1133.9	1153.5	1173.1	1178.1	1219.1	1273.7	1301.0	1336.6	1407.8	1461.2	1468.2
155°	1174.6	1189.1	1203.6	1207.3	1238.6	1280.2	1301.0	1329.4	1386.0	1428.4	1433.1
157.5°	1204.7	1218.8	1232.9	1236.4	1258.0	1286.7	1301.0	1323.0	1367.0	1400.1	1403.3
160°	1225.0	1236.0	1247.0	1249.8	1266.8	1289.6	1301.0	1319.9	1357.6	1385.9	1387.8
162.5°	1245.3	1253.5	1261.8	1263.9	1276.2	1292.7	1301.0	1316.9	1348.8	1372.7	1374.5
165°	1267.4	1275.0	1282.4	1284.3	1289.8	1297.2	1301.0	1312.5	1335.3	1352.3	1354.2
167.5°	1287.8	1291.3	1294.9	1295.7	1300.4	1306.7	1309.9	1317.3	1332.3	1343.5	1344.2
170°	1301.0	1304.6	1308.2	1309.0	1309.3	1309.7	1309.9	1317.3	1332.3	1343.5	1343.5
172.5°	1308.1	1308.9	1309.7	1309.9	1309.9	1309.9	1309.9	1315.8	1327.6	1336.5	1335.8
175°	1317.8	1317.8	1317.8	1317.8	1315.2	1311.7	1309.9	1313.6	1321.1	1326.7	1326.7
177.5°	1317.8	1317.8	1317.8	1317.8	1315.8	1313.1	1311.7	1314.6	1320.5	1324.9	1324.2
180°	1317.8	1317.8	1317.8	1317.8	1317.8	1317.8	1317.8	1317.8	1317.8	1317.8	1317.8



TEST NUMBER: P938143

CATALOG NUMBER: SQ4-FB-125U-125D-92765-1D-UNV-STD-W-8-2700K

**CANDELA DISTRIBUTION (continued):**

	80°	90°
0°	899.1	899.1
2.5°	959.8	954.0
5°	1234.4	1240.2
7.5°	1662.2	1659.4
10°	2067.0	2093.0
12.5°	2361.8	2367.6
15°	2541.1	2552.6
17.5°	2610.5	2613.4
20°	2613.4	2607.6
22.5°	2581.6	2575.8
25°	2544.0	2541.1
27.5°	2509.3	2512.2
30°	2494.8	2503.5
32.5°	2494.8	2509.3
35°	2500.6	2515.1
37.5°	2497.7	2515.1
40°	2486.2	2506.4
42.5°	2454.3	2468.9
45°	2405.2	2422.6
47.5°	2341.6	2353.2
50°	2260.7	2272.2
52.5°	2159.5	2162.4
55°	2038.0	2049.7
57.5°	1908.0	1910.9
60°	1763.4	1772.1
62.5°	1610.2	1610.2
65°	1448.3	1454.2
67.5°	1280.7	1295.1
70°	1110.1	1113.0
72.5°	942.4	942.4
75°	769.0	771.9
77.5°	604.2	604.2
80°	448.1	451.0
82.5°	309.4	315.1
85°	193.7	193.7
87.5°	89.6	81.0
90°	33.6	33.6
92.5°	134.6	107.9
95°	469.3	388.3
97.5°	1124.4	970.3
100°	1619.9	1436.4
102.5°	2107.5	1950.2
105°	2729.0	2644.6
107.5°	3136.2	3156.6
110°	3291.5	3379.5





TEST NUMBER: P938143

CATALOG NUMBER: SQ4-FB-125U-125D-92765-1D-UNV-STD-W-8-2700K

**CANDELA DISTRIBUTION (continued):**

	80°	90°
112.5°	3305.3	3440.5
115°	3217.7	3405.2
117.5°	3031.8	3239.8
120°	2882.1	3084.1
122.5°	2736.3	2935.6
125°	2528.2	2711.8
127.5°	2341.1	2495.9
130°	2230.8	2373.9
132.5°	2130.8	2258.9
135°	1993.7	2104.1
137.5°	1883.7	1974.1
140°	1808.3	1892.7
142.5°	1745.7	1818.4
145°	1652.0	1707.0
147.5°	1580.1	1625.7
150°	1534.8	1571.7
152.5°	1496.0	1523.9
155°	1451.5	1470.0
157.5°	1416.3	1429.3
160°	1395.2	1402.7
162.5°	1381.6	1388.6
165°	1361.7	1369.2
167.5°	1347.4	1350.5
170°	1343.5	1343.5
172.5°	1333.0	1330.2
175°	1326.7	1326.7
177.5°	1321.0	1317.8
180°	1317.8	1317.8



TEST NUMBER: P938143

CATALOG NUMBER: SQ4-FB-125U-125D-92765-1D-UNV-STD-W-8-2700K

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.48	6.33	6.48	7.34	8.68	18.66	19.51	19.65	20.52	21.86
	3H	6.19	6.95	7.19	7.97	9.33	20.50	21.26	21.50	22.28	23.64
	4H	6.49	7.21	7.50	8.23	9.60	21.14	21.87	22.16	22.89	24.26
	6H	6.74	7.40	7.76	8.43	9.81	21.57	22.24	22.60	23.27	24.65
	8H	6.80	7.44	7.84	8.48	9.86	21.70	22.33	22.73	23.37	24.75
	12H	6.82	7.43	7.86	8.46	9.86	21.76	22.37	22.80	23.41	24.81
4H	2H	12.70	13.42	13.72	14.44	15.81	18.93	19.66	19.96	20.68	22.05
	3H	14.26	14.87	15.29	15.92	17.30	20.98	21.59	22.01	22.63	24.02
	4H	14.36	14.91	15.40	15.95	17.36	21.75	22.30	22.78	23.34	24.75
	6H	14.37	14.85	15.42	15.91	17.31	22.28	22.76	23.33	23.83	25.23
	8H	14.34	14.79	15.39	15.85	17.26	22.45	22.89	23.50	23.95	25.37
	12H	14.30	14.71	15.37	15.78	17.20	22.54	22.94	23.61	24.02	25.44
8H	4H	15.80	16.25	16.85	17.31	18.72	21.80	22.25	22.85	23.31	24.73
	6H	16.04	16.41	17.12	17.51	18.93	22.43	22.81	23.51	23.90	25.32
	8H	16.06	16.39	17.14	17.47	18.90	22.65	22.98	23.73	24.06	25.49
	12H	16.03	16.32	17.11	17.39	18.87	22.80	23.08	23.88	24.16	25.63
12H	4H	15.94	16.35	17.01	17.42	18.84	21.76	22.16	22.83	23.23	24.65
	6H	16.30	16.63	17.38	17.71	19.14	22.42	22.74	23.50	23.83	25.26
	8H	16.37	16.66	17.46	17.74	19.21	22.65	22.93	23.73	24.01	25.48