

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: CORELITE

Report Number: P562213

Luminaire Tested: **SQ4-PW1-050U-075D-92765-1D-UNV-STD-W-4 (6500K)**

Issue Date: 7/30/2021

**Test Information**

Test Method: LM-79-2019  
Report Number: P562213  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2101-105-51, G2-2106-289-3)  
Test Lab: INNOVATION CENTER  
Issue Date: 7/30/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: CORELITE  
Catalog Number: SQ4-PW1-050U-075D-92765-1D-UNV-STD-W-4 (6500K)  
Description: CORELITE SQ4 SUSPENDED LED LUMINAIRE WITH PERCEIVE WAVES CONTINUOUS LENS  
DOWNLIGHT 750 LUMENS PER FOOT  
UPLIGHT 500 LUMENS PER FOOT  
Light Source: 2700K/65000K CCT, 90 CRI LEDS, TUNED TO 6500K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 5524.8 lumens  
Efficiency: N/A  
Efficacy: 116.6 lumens/watt  
Spacing Criteria (0/90/45): 1.22 / 1.19 / 1.31  
Luminous Opening: Rectangular (W 0.29' x L: 4' x H: 0')  
CIE Type: General Diffuse

Input Watts (W): 47.4  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P562213  
CATALOG NUMBER: SQ4-PW1-050U-075D-92765-1D-UNV-STD-W-4 (6500K)

### Luminous Intensity Polar Plot

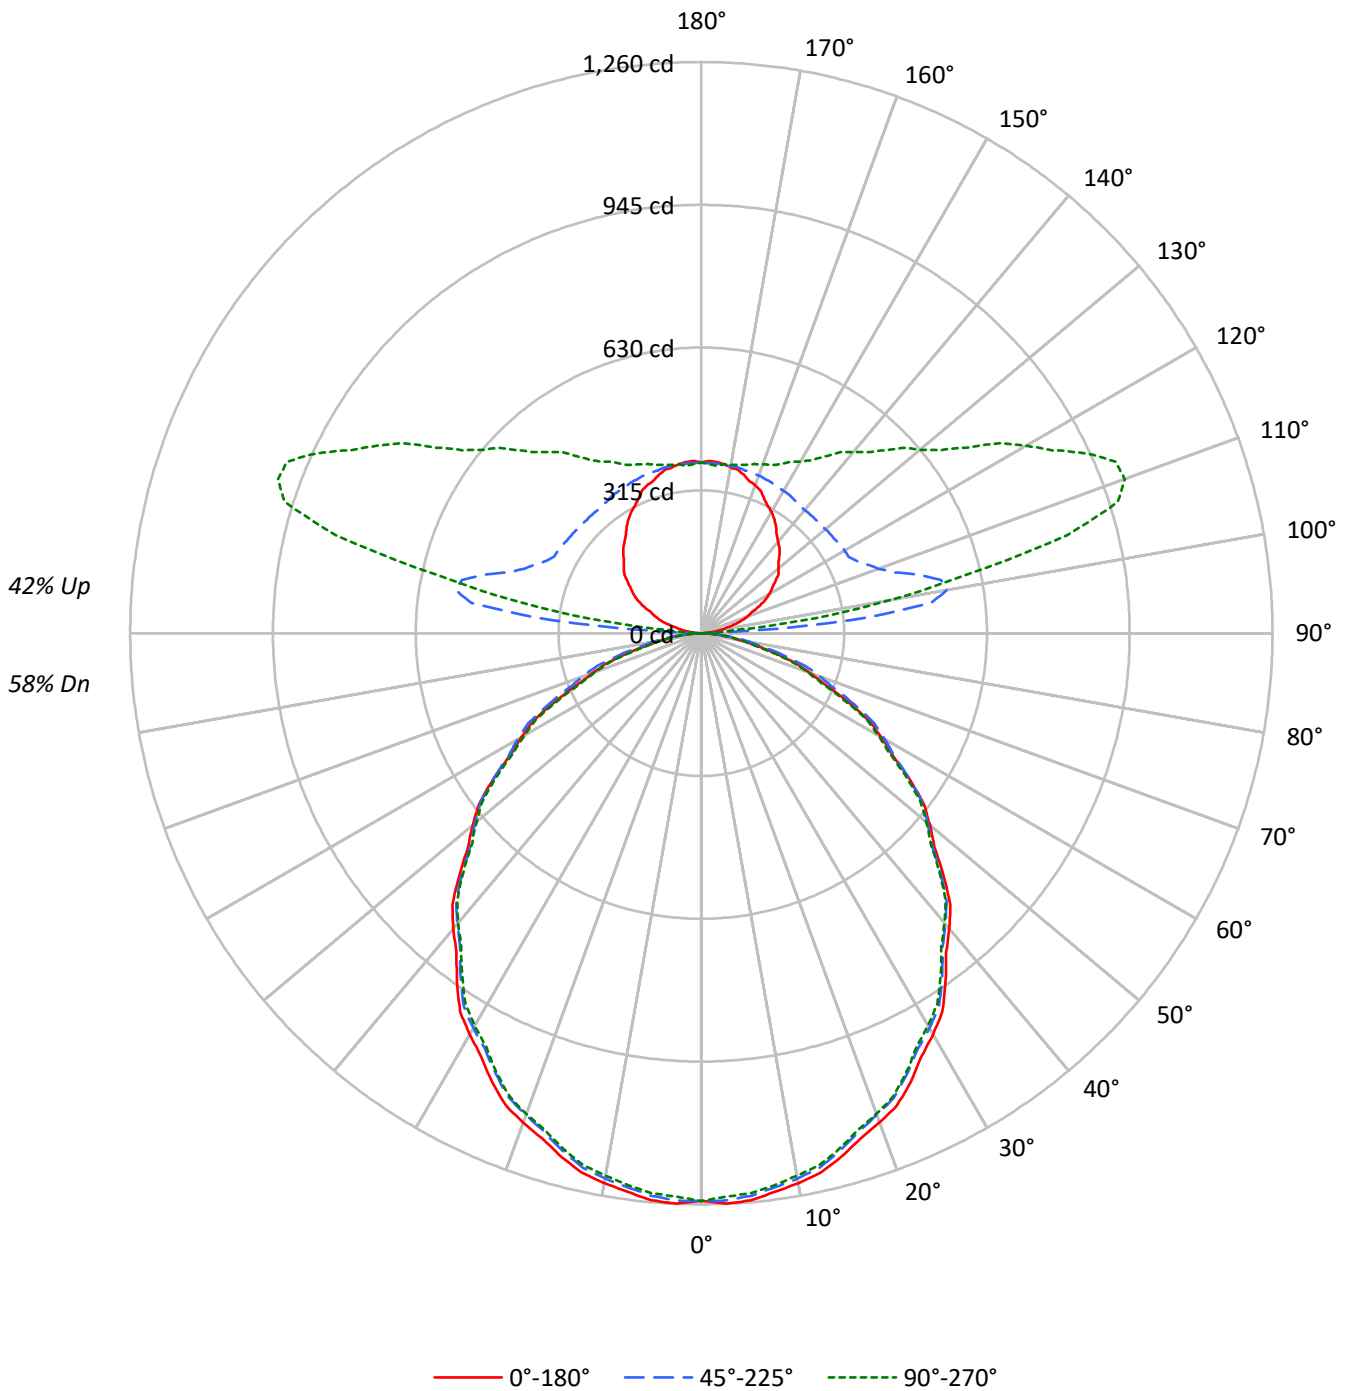



TEST NUMBER: P562213

CATALOG NUMBER: SQ4-PW1-050U-075D-92765-1D-UNV-STD-W-4 (6500K)

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	109	109	109	109	102	102	102	102	88	88	88	75	75	75	63	63	63	58
1	100	95	91	88	93	89	86	83	77	75	72	66	64	63	56	55	54	49
2	91	83	77	72	84	78	72	68	68	64	60	58	55	52	49	47	45	41
3	83	73	66	60	77	69	62	57	60	55	51	52	48	44	44	41	39	35
4	76	65	57	51	70	61	54	48	53	48	43	46	42	38	39	36	33	30
5	70	58	50	44	65	54	47	42	48	42	37	41	37	33	35	32	29	26
6	64	52	44	38	60	49	42	36	43	37	33	37	33	29	32	28	26	23
7	59	47	39	33	55	44	37	32	39	33	29	34	29	26	29	26	23	20
8	55	43	35	30	51	40	33	28	36	30	26	31	26	23	27	23	20	18
9	51	39	32	26	48	37	30	25	33	27	23	29	24	21	25	21	18	16
10	48	36	29	24	45	34	27	23	30	25	21	26	22	19	23	19	17	15

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	11556	11556	11556
5°	11631	11539	11488
10°	11538	11445	11383
15°	11415	11289	11247
20°	11279	11106	11084
25°	11122	10919	10885
30°	10887	10722	10651
35°	10577	10429	10367
40°	10247	10088	10048
45°	9848	9719	9676
50°	9440	9361	9298
55°	9000	9000	8858
60°	8451	8614	8307
65°	7733	8119	7540
70°	6817	7472	6639
75°	5821	6687	5664
80°	4516	5627	4575
85°	2922	4319	3853



TEST NUMBER: P562213

CATALOG NUMBER: SQ4-PW1-050U-075D-92765-1D-UNV-STD-W-4 (6500K)

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	117.9	2.1
10°-20°	333.0	6.0
20°-30°	493.9	8.9
30°-40°	578.0	10.5
40°-50°	575.4	10.4
50°-60°	496.9	9.0
60°-70°	357.6	6.5
70°-80°	187.5	3.4
80°-90°	46.5	0.8
90°-100°	171.5	3.1
100°-110°	488.0	8.8
110°-120°	467.6	8.5
120°-130°	370.1	6.7
130°-140°	297.0	5.4
140°-150°	232.5	4.2
150°-160°	170.1	3.1
160°-170°	105.4	1.9
170°-180°	35.8	0.6
0°-30°	944.9	17.1
0°-40°	1522.8	27.6
0°-60°	2595.1	47.0
0°-90°	3186.8	57.7
90°-120°	1127.1	20.4
90°-150°	2026.7	36.7
90°-180°	2338.0	42.3
0°-180°	5524.8	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1252	1252	1252	1252	1252	
5°	1256	1242	1246	1242	1240	119
15°	1195	1180	1182	1180	1178	337
25°	1092	1074	1073	1066	1069	502
35°	939	926	926	917	920	587
45°	755	748	745	743	742	582
55°	560	558	560	552	551	499
65°	354	365	372	357	345	351
75°	163	178	188	175	159	175
85°	28	36	41	39	36	36
90°	0	0	0	0	0	2
95°	19	74	332	115	71	21
105°	76	115	497	878	835	80
115°	141	170	377	799	938	139
125°	199	221	360	597	714	178
135°	243	264	356	504	570	188
145°	287	302	358	437	476	179
155°	328	335	367	395	411	151
165°	362	364	371	379	385	102
175°	379	377	376	374	371	36
180°	376	376	376	376	376	

TEST NUMBER: P562213

CATALOG NUMBER: SQ4-PW1-050U-075D-92765-1D-UNV-STD-W-4 (6500K)

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1252.5	1252.5	1252.5	1252.5	1252.5
2.5°	1259.6	1249.2	1252.5	1249.7	1243.7
5°	1255.8	1241.8	1245.9	1242.5	1240.4
7.5°	1243.0	1230.1	1233.1	1229.5	1228.2
10°	1231.6	1218.6	1221.6	1217.2	1215.0
12.5°	1218.3	1204.5	1207.5	1203.1	1201.8
15°	1195.1	1180.0	1181.9	1179.6	1177.5
17.5°	1168.2	1152.9	1153.2	1149.7	1149.2
20°	1148.8	1132.6	1131.1	1126.8	1128.9
22.5°	1127.6	1110.6	1109.1	1103.0	1106.0
25°	1092.5	1074.2	1072.6	1066.1	1069.3
27.5°	1051.9	1033.8	1033.8	1024.6	1028.1
30°	1021.9	1004.6	1006.4	995.5	999.8
32.5°	990.1	974.6	975.5	964.6	968.9
35°	939.1	926.2	925.9	917.1	920.4
37.5°	887.0	875.6	873.8	868.7	869.6
40°	850.8	841.1	837.6	834.3	834.3
42.5°	812.9	804.0	800.5	798.1	797.2
45°	754.8	748.4	744.9	742.7	741.6
47.5°	697.4	691.4	688.4	686.8	685.7
50°	657.7	653.4	652.2	648.9	647.8
52.5°	618.0	615.4	614.2	610.0	608.9
55°	559.5	558.4	559.5	551.7	550.7
57.5°	498.6	500.3	503.9	493.4	490.9
60°	458.0	462.3	466.8	454.6	450.2
62.5°	416.5	423.4	429.7	415.7	409.6
65°	354.2	365.0	371.9	357.3	345.4
67.5°	294.2	307.6	315.8	300.1	286.7
70°	252.7	267.8	277.0	261.2	246.1
72.5°	216.5	233.3	240.8	225.9	210.8
75°	163.3	178.4	187.6	175.1	158.9
77.5°	115.9	130.1	137.7	126.8	113.4
80°	85.0	100.1	105.9	96.9	86.1
82.5°	60.3	72.8	76.8	71.3	64.0
85°	27.6	36.2	40.8	38.6	36.4
87.5°	7.1	13.1	16.8	16.8	17.7
90°	0.0	0.0	0.0	0.0	0.0
92.5°	5.7	30.4	70.4	20.5	15.5
95°	18.6	73.9	332.0	114.9	70.8
97.5°	34.2	86.5	511.3	365.9	250.7
100°	45.1	94.1	550.3	557.4	429.3
102.5°	57.1	102.2	541.7	713.5	601.6
105°	75.8	115.0	497.3	878.4	835.1
107.5°	94.9	130.0	445.5	925.0	963.6
110°	108.1	140.9	415.7	907.2	993.9

TEST NUMBER: P562213

CATALOG NUMBER: SQ4-PW1-050U-075D-92765-1D-UNV-STD-W-4 (6500K)

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	120.6	151.8	395.7	865.1	988.8
115°	141.0	170.4	377.1	798.9	938.1
117.5°	158.9	186.4	366.1	726.5	874.0
120°	173.2	196.3	364.9	685.1	826.5
122.5°	184.6	207.7	362.1	648.9	780.1
125°	198.9	220.6	359.9	597.3	714.1
127.5°	214.5	234.8	358.8	566.5	662.8
130°	222.5	242.8	357.1	545.0	629.0
132.5°	231.1	250.9	357.1	528.3	605.5
135°	243.3	263.6	355.6	504.5	570.3
137.5°	254.7	274.5	355.5	484.4	541.3
140°	263.3	283.6	354.9	467.8	522.4
142.5°	273.1	290.0	356.6	454.5	503.5
145°	286.9	301.6	358.5	436.7	475.8
147.5°	298.8	313.1	361.6	418.7	452.5
150°	309.1	318.9	362.8	412.7	436.5
152.5°	317.1	327.5	363.9	404.7	426.8
155°	327.7	335.4	367.1	394.6	410.7
157.5°	340.9	345.5	367.8	390.1	401.6
160°	347.8	351.3	370.7	386.6	396.4
162.5°	351.8	355.8	371.2	383.7	391.3
165°	362.1	363.5	371.4	379.4	385.0
167.5°	369.1	367.8	374.7	378.3	380.5
170°	371.4	370.7	373.5	374.3	377.1
172.5°	376.5	374.2	375.2	373.1	375.4
175°	379.2	377.1	375.7	373.5	370.7
177.5°	380.4	377.0	375.2	373.0	373.5
180°	376.4	376.4	376.4	376.4	376.4

(END OF REPORT)