

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: CORELITE

Report Number: P562219

Luminaire Tested: **SQ4-PW1-050U-100D-92765-1D-UNV-STD-W-4 (2700K)**

Issue Date: 7/30/2021

Test Information

Test Method: LM-79-2019
Report Number: P562219
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2101-105-51, G2-2106-289-3)
Test Lab: INNOVATION CENTER
Issue Date: 7/30/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: CORELITE
Catalog Number: SQ4-PW1-050U-100D-92765-1D-UNV-STD-W-4 (2700K)
Description: CORELITE SQ4 SUSPENDED LED LUMINAIRE WITH PERCEIVE WAVES CONTINUOUS LENS
DOWNLIGHT 1000 LUMENS PER FOOT
UPLIGHT 500 LUMENS PER FOOT
Light Source: 2700K/65000K CCT, 90 CRI LEDS, TUNED TO 2700K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5830.1 lumens
Efficiency: N/A
Efficacy: 100.3 lumens/watt
Spacing Criteria (0/90/45): 1.22 / 1.19 / 1.31
Luminous Opening: Rectangular (W 0.29' x L: 4' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 58.1
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P562219
CATALOG NUMBER: SQ4-PW1-050U-100D-92765-1D-UNV-STD-W-4 (2700K)

Luminous Intensity Polar Plot

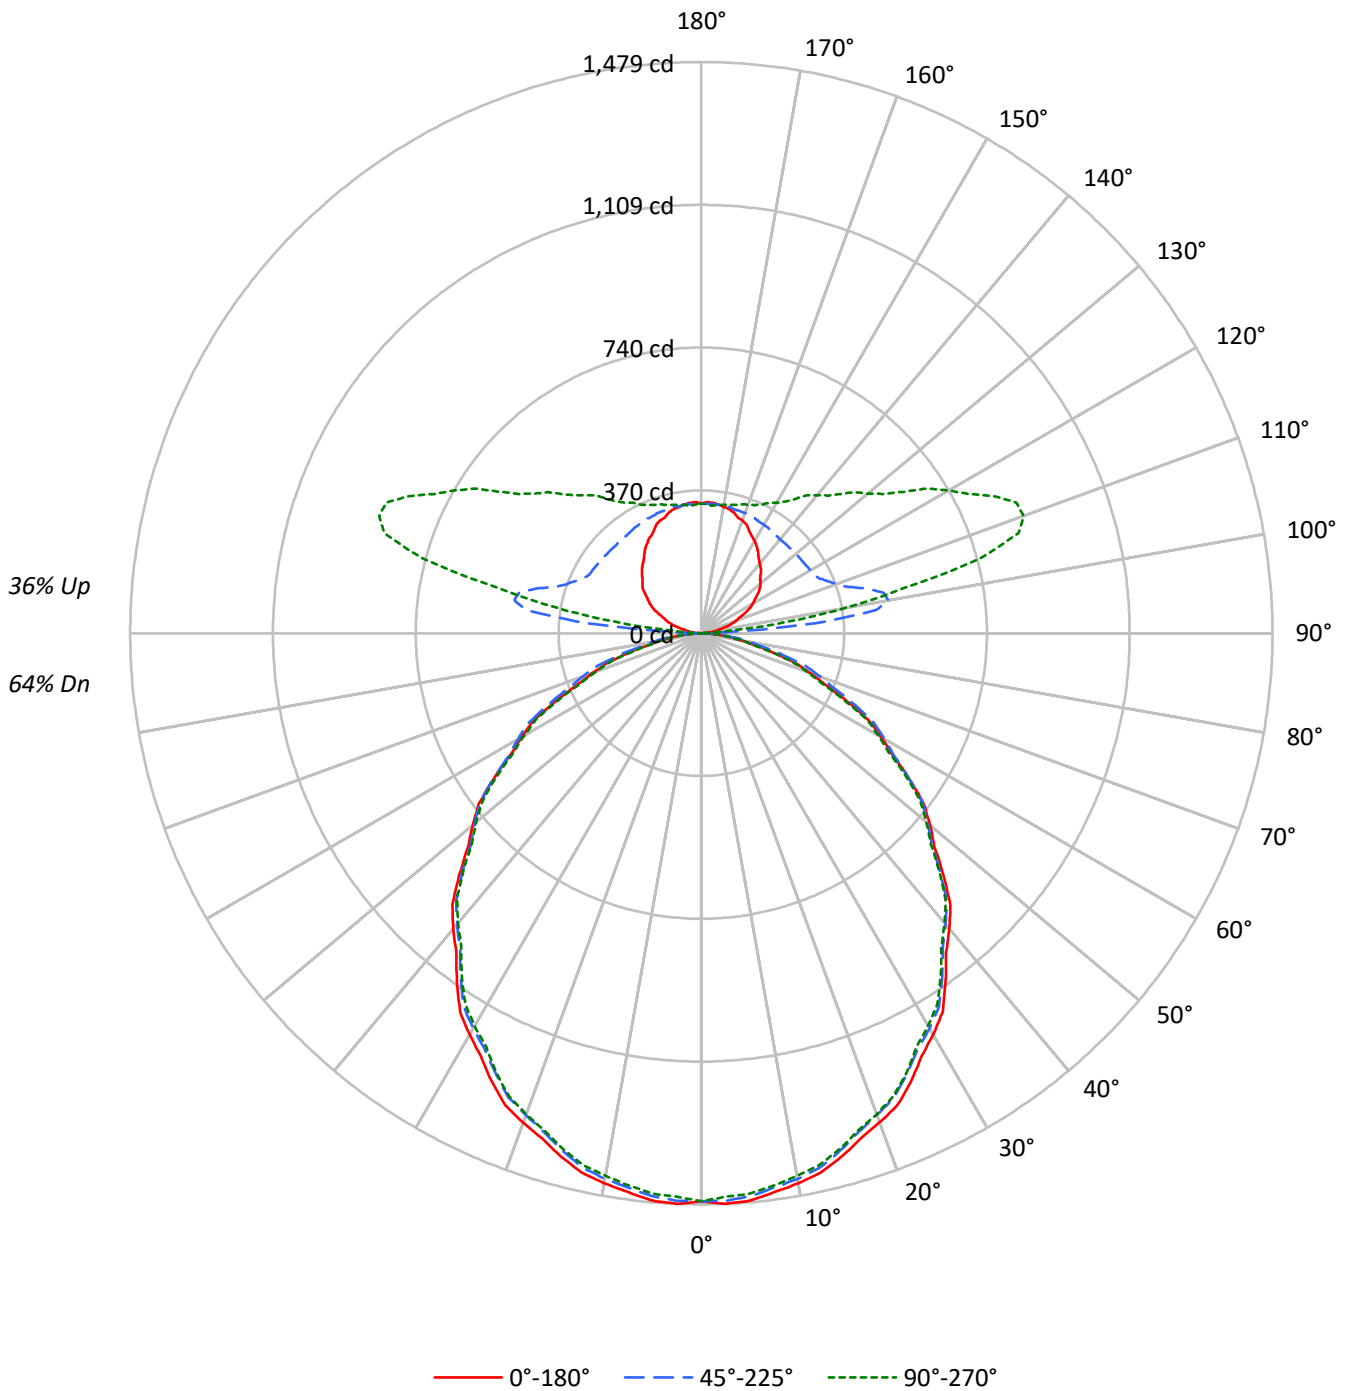



TEST NUMBER: P562219

CATALOG NUMBER: SQ4-PW1-050U-100D-92765-1D-UNV-STD-W-4 (2700K)

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	111	111	111	111	104	104	104	104	91	91	91	80	80	80	69	69	69	64
1	101	97	93	89	95	91	88	85	80	78	75	70	69	67	61	60	59	54
2	92	85	78	73	86	80	74	70	71	66	63	62	59	56	54	52	50	46
3	84	74	67	61	79	70	64	58	62	57	53	55	51	47	48	45	42	39
4	77	66	58	52	72	62	55	50	55	50	45	49	44	41	43	39	37	33
5	71	59	51	45	66	56	48	43	50	44	39	44	39	35	39	35	32	29
6	65	53	45	39	61	50	43	37	45	39	34	40	35	31	35	31	28	25
7	60	48	40	34	57	45	38	33	41	35	30	36	31	28	32	28	25	23
8	56	44	36	30	53	41	34	29	37	31	27	33	28	25	30	25	22	20
9	52	40	32	27	49	38	31	26	34	28	24	31	26	22	27	23	20	18
10	49	37	29	24	46	35	28	24	32	26	22	28	24	20	25	21	18	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	13569	13569	13569
5°	13657	13549	13488
10°	13548	13438	13365
15°	13404	13256	13206
20°	13244	13041	13015
25°	13059	12822	12782
30°	12783	12589	12507
35°	12420	12244	12172
40°	12032	11845	11798
45°	11564	11412	11362
50°	11085	10992	10917
55°	10568	10568	10401
60°	9922	10114	9756
65°	9080	9534	8855
70°	8004	8772	7796
75°	6837	7853	6652
80°	5303	6610	5372
85°	3430	5071	4531



TEST NUMBER: P562219

CATALOG NUMBER: SQ4-PW1-050U-100D-92765-1D-UNV-STD-W-4 (2700K)

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	138.5	2.4
10°-20°	391.0	6.7
20°-30°	580.0	9.9
30°-40°	678.6	11.6
40°-50°	675.6	11.6
50°-60°	583.4	10.0
60°-70°	419.9	7.2
70°-80°	220.2	3.8
80°-90°	54.6	0.9
90°-100°	153.2	2.6
100°-110°	435.9	7.5
110°-120°	417.6	7.2
120°-130°	330.5	5.7
130°-140°	265.3	4.6
140°-150°	207.7	3.6
150°-160°	152.0	2.6
160°-170°	94.1	1.6
170°-180°	31.9	0.5
0°-30°	1109.5	19.0
0°-40°	1788.1	30.7
0°-60°	3047.1	52.3
0°-90°	3741.8	64.2
90°-120°	1006.7	17.3
90°-150°	1810.2	31.0
90°-180°	2088.0	35.8
0°-180°	5830.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1471	1471	1471	1471	1471	
5°	1475	1458	1463	1459	1456	140
15°	1403	1386	1388	1385	1383	396
25°	1283	1261	1260	1252	1256	590
35°	1103	1088	1087	1077	1081	689
45°	886	879	875	872	871	684
55°	657	656	657	648	647	586
65°	416	429	437	420	406	412
75°	192	210	220	206	187	206
85°	32	42	48	45	43	43
90°	0	0	0	0	0	2
95°	17	66	297	103	63	19
105°	68	103	444	785	746	72
115°	126	152	337	714	838	124
125°	178	197	322	534	638	159
135°	217	235	318	451	509	168
145°	256	269	320	390	425	160
155°	293	300	328	352	367	135
165°	323	325	332	339	344	91
175°	339	337	336	334	331	32
180°	336	336	336	336	336	

TEST NUMBER: P562219

CATALOG NUMBER: SQ4-PW1-050U-100D-92765-1D-UNV-STD-W-4 (2700K)

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1470.7	1470.7	1470.7	1470.7	1470.7
2.5°	1479.0	1466.8	1470.7	1467.4	1460.3
5°	1474.6	1458.1	1462.9	1459.0	1456.4
7.5°	1459.5	1444.3	1447.9	1443.7	1442.2
10°	1446.1	1430.9	1434.4	1429.2	1426.6
12.5°	1430.5	1414.3	1417.8	1412.6	1411.1
15°	1403.3	1385.6	1387.8	1385.1	1382.6
17.5°	1371.7	1353.7	1354.1	1349.9	1349.4
20°	1348.9	1329.9	1328.2	1323.0	1325.6
22.5°	1324.0	1304.0	1302.2	1295.1	1298.6
25°	1282.8	1261.3	1259.5	1251.8	1255.6
27.5°	1235.1	1213.8	1213.9	1203.1	1207.1
30°	1199.9	1179.6	1181.7	1168.9	1174.0
32.5°	1162.6	1144.3	1145.5	1132.6	1137.7
35°	1102.7	1087.5	1087.1	1076.9	1080.7
37.5°	1041.5	1028.1	1026.0	1020.0	1021.1
40°	999.0	987.6	983.5	979.6	979.6
42.5°	954.5	944.1	939.9	937.1	936.1
45°	886.3	878.7	874.6	872.0	870.8
47.5°	818.9	811.8	808.3	806.5	805.2
50°	772.3	767.2	765.8	761.9	760.6
52.5°	725.6	722.6	721.2	716.3	715.0
55°	657.0	655.7	657.0	647.9	646.6
57.5°	585.4	587.5	591.6	579.4	576.4
60°	537.7	542.8	548.1	533.7	528.7
62.5°	489.0	497.1	504.6	488.1	481.0
65°	415.9	428.6	436.7	419.5	405.6
67.5°	345.5	361.2	370.8	352.3	336.6
70°	296.7	314.5	325.2	306.7	289.0
72.5°	254.2	274.0	282.7	265.2	247.5
75°	191.8	209.5	220.3	205.6	186.6
77.5°	136.1	152.8	161.7	148.9	133.2
80°	99.8	117.5	124.4	113.7	101.1
82.5°	70.7	85.4	90.2	83.8	75.2
85°	32.4	42.5	47.9	45.3	42.8
87.5°	8.3	15.4	19.7	19.7	20.7
90°	0.0	0.0	0.0	0.0	0.0
92.5°	5.1	27.1	62.9	18.3	13.8
95°	16.6	66.0	296.6	102.6	63.3
97.5°	30.6	77.3	456.7	326.8	224.0
100°	40.3	84.0	491.5	497.8	383.5
102.5°	51.0	91.2	483.8	637.3	537.4
105°	67.7	102.7	444.2	784.6	745.9
107.5°	84.8	116.1	397.9	826.2	860.7
110°	96.5	125.9	371.3	810.3	887.8

TEST NUMBER: P562219

CATALOG NUMBER: SQ4-PW1-050U-100D-92765-1D-UNV-STD-W-4 (2700K)

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	107.8	135.6	353.4	772.7	883.2
115°	125.9	152.2	336.8	713.6	837.9
117.5°	141.9	166.5	327.0	648.9	780.6
120°	154.7	175.3	326.0	612.0	738.2
122.5°	164.9	185.5	323.4	579.6	696.8
125°	177.7	197.1	321.5	533.5	637.9
127.5°	191.6	209.7	320.5	506.0	592.0
130°	198.8	216.9	318.9	486.8	561.8
132.5°	206.4	224.1	318.9	471.8	540.8
135°	217.3	235.4	317.7	450.7	509.4
137.5°	227.5	245.2	317.5	432.7	483.4
140°	235.2	253.3	317.0	417.8	466.6
142.5°	243.9	259.0	318.5	406.0	449.7
145°	256.3	269.4	320.2	390.0	425.0
147.5°	266.9	279.7	323.0	373.9	404.2
150°	276.1	284.9	324.0	368.6	389.9
152.5°	283.3	292.5	325.1	361.4	381.2
155°	292.7	299.6	327.9	352.5	366.9
157.5°	304.5	308.6	328.5	348.4	358.7
160°	310.6	313.7	331.1	345.3	354.1
162.5°	314.2	317.8	331.6	342.7	349.5
165°	323.4	324.7	331.7	338.9	343.9
167.5°	329.7	328.5	334.7	337.9	339.9
170°	331.7	331.1	333.6	334.3	336.8
172.5°	336.3	334.2	335.2	333.3	335.3
175°	338.7	336.9	335.5	333.6	331.1
177.5°	339.8	336.8	335.2	333.1	333.6
180°	336.2	336.2	336.2	336.2	336.2

(END OF REPORT)