

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: CORELITE

Report Number: P521891

Luminaire Tested: **SQ4-WB-0U-100D-92765-1D-UNV-STD-W-4 (5000K)**

Issue Date: 5/5/2021

**Test Information**

Test Method: LM-79-08  
Report Number: P521891  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2009-966-13)  
Test Lab: INNOVATION CENTER  
Issue Date: 5/5/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: CORELITE  
Catalog Number: SQ4-WB-0U-100D-92765-1D-UNV-STD-W-4 (5000K)  
Description: CORELITE SQ4 SUSPENDED LED LUMINAIRE WITH WHITE BAFFLE  
DOWNLIGHT 1000 LUMENS PER FOOT  
DIRECT ONLY  
Light Source: 2700K/65000K CCT, 90 CRI LEDS, TUNED TO 5000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 3590.1 lumens  
Efficiency: N/A  
Efficacy: 84.9 lumens/watt  
Spacing Criteria (0/90/45): 0.89 / 1 / 1.02  
Luminous Opening: Rectangular (W 0.29' x L: 4' x H: 0')  
CIE Type: Direct

Input Watts (W): 42.3  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P521891

CATALOG NUMBER: SQ4-WB-OU-100D-92765-1D-UNV-STD-W-4 (5000K)

### Luminous Intensity Polar Plot

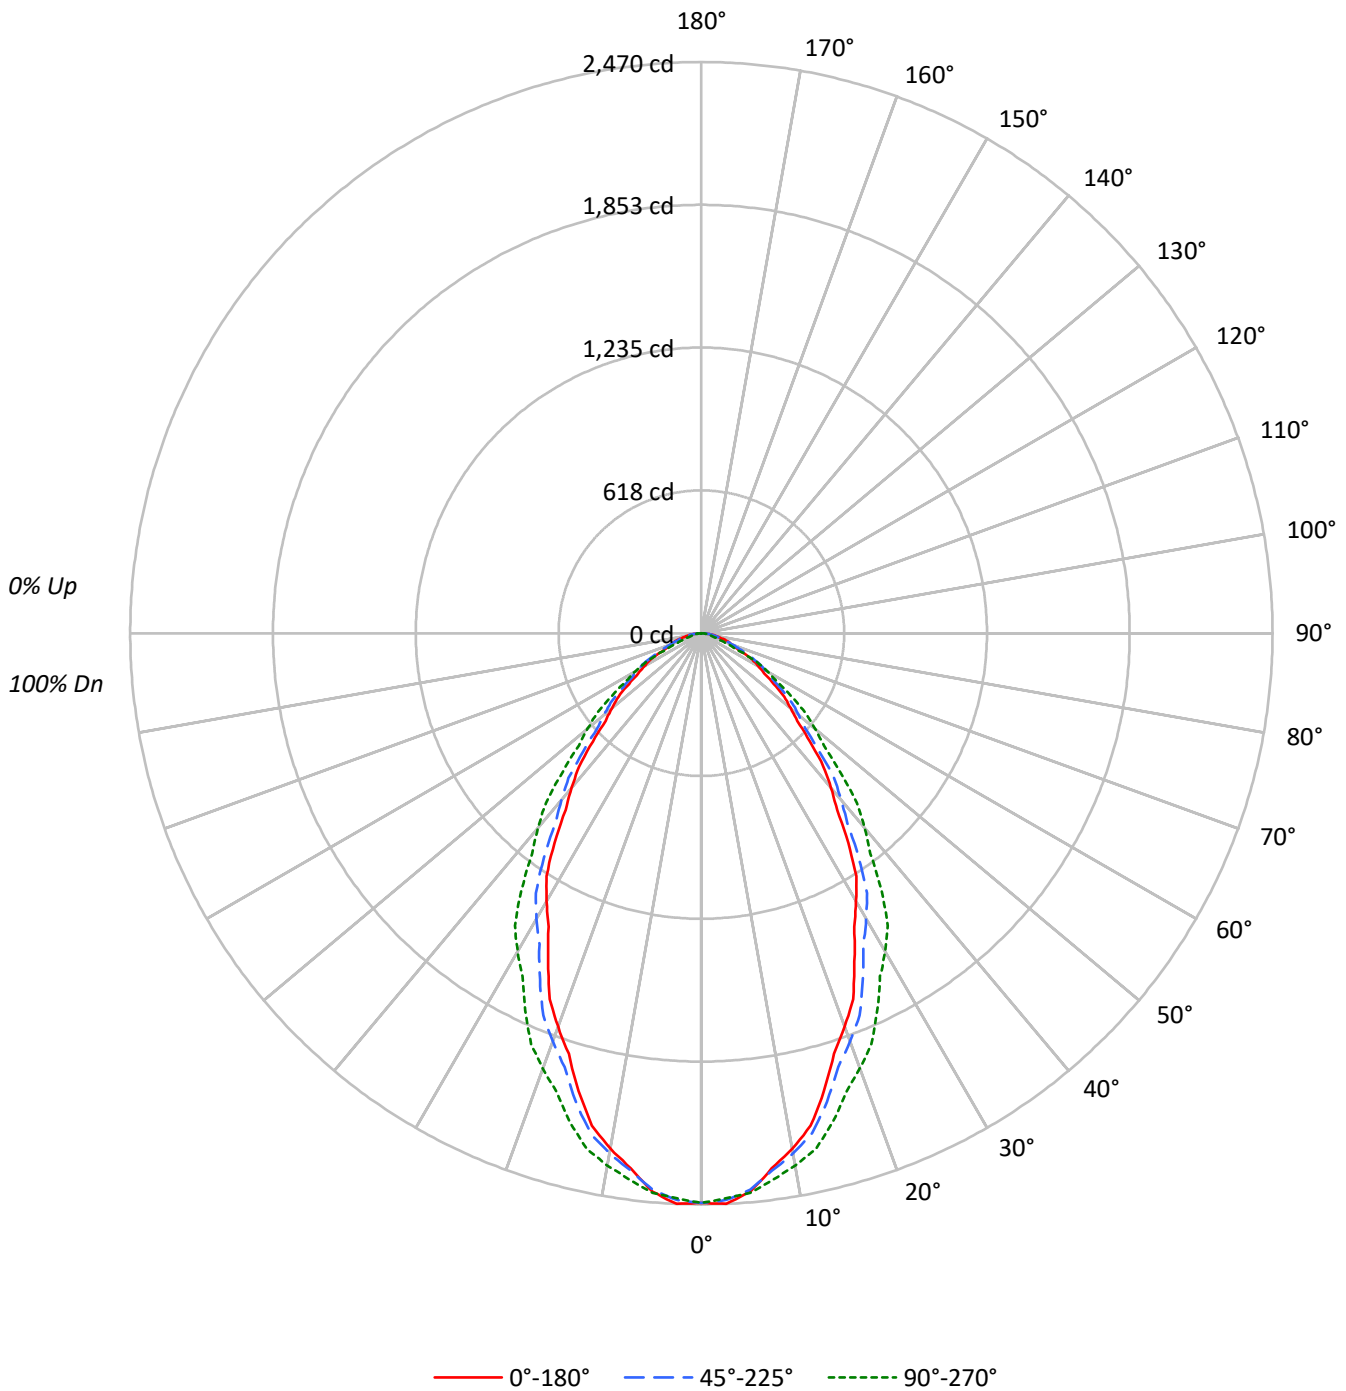



TEST NUMBER: P521891

CATALOG NUMBER: SQ4-WB-OU-100D-92765-1D-UNV-STD-W-4 (5000K)

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				
1	111	107	104	101	109	105	102	99	101	99	96	97	95	93	94	92	91	89				
2	103	97	91	87	101	95	90	86	92	87	84	88	85	82	85	83	80	78				
3	96	87	81	75	94	86	80	75	83	78	73	80	76	72	78	74	71	69				
4	89	79	72	66	87	78	71	66	76	70	65	74	68	64	71	67	64	62				
5	83	72	65	59	81	71	64	59	69	63	58	67	62	58	66	61	57	55				
6	78	66	59	53	76	65	58	53	64	57	53	62	56	52	61	56	52	50				
7	73	61	53	48	71	60	53	48	59	52	48	58	52	47	56	51	47	45				
8	68	57	49	44	67	56	49	44	55	48	44	53	48	43	52	47	43	41				
9	64	53	45	40	63	52	45	40	51	45	40	50	44	40	49	44	40	38				
10	61	49	42	37	60	48	42	37	48	41	37	47	41	37	46	41	37	35				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	22731	22731	22731
5°	22447	22367	22497
10°	21208	21401	21896
15°	19578	20032	20931
20°	17779	18448	19668
25°	15946	16815	18324
30°	14258	15191	16929
35°	12468	13369	15281
40°	10494	11327	13228
45°	8661	9409	11045
50°	7231	7883	9202
55°	6138	6764	7599
60°	5246	5864	6063
65°	4176	4932	3919
70°	3704	3849	2390
75°	3429	3123	1465
80°	3161	2874	1265
85°	2858	2636	1027



TEST NUMBER: P521891

CATALOG NUMBER: SQ4-WB-OU-100D-92765-1D-UNV-STD-W-4 (5000K)

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	226.0	6.3
10°-20°	587.8	16.4
20°-30°	761.4	21.2
30°-40°	745.6	20.8
40°-50°	570.7	15.9
50°-60°	380.3	10.6
60°-70°	207.5	5.8
70°-80°	86.5	2.4
80°-90°	24.5	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1575.1	43.9
0°-40°	2320.7	64.6
0°-60°	3271.6	91.1
0°-90°	3590.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3590.1	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2464	2464	2464	2464	2464	
5°	2424	2399	2415	2421	2429	225
15°	2050	2042	2097	2154	2191	572
25°	1566	1571	1652	1724	1800	720
35°	1107	1112	1187	1267	1357	688
45°	664	676	721	776	846	518
55°	382	398	420	436	472	346
65°	191	207	226	197	180	199
75°	96	96	88	60	41	103
85°	27	27	25	16	10	31
90°	0	0	0	0	0	



TEST NUMBER: P521891

CATALOG NUMBER: SQ4-WB-OU-100D-92765-1D-UNV-STD-W-4 (5000K)

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	2463.7	2463.7	2463.7	2463.7	2463.7
2.5°	2469.8	2447.8	2453.3	2453.2	2446.4
5°	2423.7	2399.4	2415.1	2420.7	2429.1
7.5°	2333.8	2315.4	2343.9	2365.1	2382.2
10°	2263.7	2247.9	2284.3	2315.0	2337.2
12.5°	2182.4	2169.1	2214.2	2255.5	2284.5
15°	2049.7	2042.3	2097.2	2154.3	2191.3
17.5°	1907.6	1904.0	1967.1	2033.7	2081.0
20°	1810.8	1809.7	1878.9	1948.2	2003.2
22.5°	1713.0	1715.4	1788.1	1860.2	1922.8
25°	1566.4	1570.7	1651.8	1723.8	1800.0
27.5°	1430.9	1432.8	1516.7	1592.7	1673.9
30°	1338.3	1343.6	1425.9	1504.6	1589.1
32.5°	1245.8	1251.9	1332.5	1413.8	1500.1
35°	1107.0	1112.3	1187.0	1266.9	1356.7
37.5°	963.9	971.1	1037.4	1112.9	1201.3
40°	871.3	881.9	940.5	1011.7	1098.3
42.5°	782.2	795.4	849.7	917.2	995.4
45°	663.8	676.4	721.1	775.6	846.5
47.5°	561.7	576.3	610.6	657.6	718.0
50°	503.8	517.5	549.2	584.0	641.1
52.5°	452.7	466.5	494.7	521.5	570.1
55°	381.6	397.5	420.5	436.5	472.4
57.5°	323.2	338.5	356.7	363.9	385.7
60°	284.3	301.2	317.8	317.0	328.6
62.5°	248.9	263.2	279.8	268.3	269.0
65°	191.3	207.2	225.9	197.4	179.5
67.5°	154.6	158.0	177.3	137.7	116.3
70°	137.3	137.3	142.7	106.6	88.6
72.5°	120.9	120.9	115.9	86.7	67.9
75°	96.2	96.2	87.6	60.1	41.1
77.5°	74.2	73.3	67.0	44.8	29.8
80°	59.5	59.5	54.1	35.4	23.8
82.5°	46.5	46.5	41.9	27.7	17.7
85°	27.0	27.0	24.9	16.1	9.7
87.5°	9.5	9.5	8.6	5.2	4.3
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)