

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: CORELITE

Report Number: P520909

Luminaire Tested: **SQ4-025U-0D-93050-1D-UNV-STD-W-4 (4500K)**

Issue Date: 5/5/2021

**Test Information**

Test Method: LM-79-08  
Report Number: P520909  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2101-105-50)  
Test Lab: INNOVATION CENTER  
Issue Date: 5/5/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: CORELITE  
Catalog Number: SQ4-025U-0D-93050-1D-UNV-STD-W-4 (4500K)  
Description: CORELITE SQ4 SUSPENDED LED LUMINAIRE  
INDIRECT ONLY  
UPLIGHT 250 LUMENS PER FOOT  
Light Source: 3000K/5000K CCT, 90 CRI LEDS, TUNED TO 4500K CCT  
Ballast/Driver: ELECTRONIC DRIVER


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1868.2 lumens  
Efficiency: N/A  
Efficacy: 130.6 lumens/watt  
Spacing Criteria (0/90/45): - / - / -  
Luminous Opening: Rectangular (W 0.29' x L: 4' x H: 0')  
CIE Type: Indirect

Input Watts (W): 14.3  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P520909  
CATALOG NUMBER: SQ4-025U-0D-93050-1D-UNV-STD-W-4 (4500K)

### Luminous Intensity Polar Plot

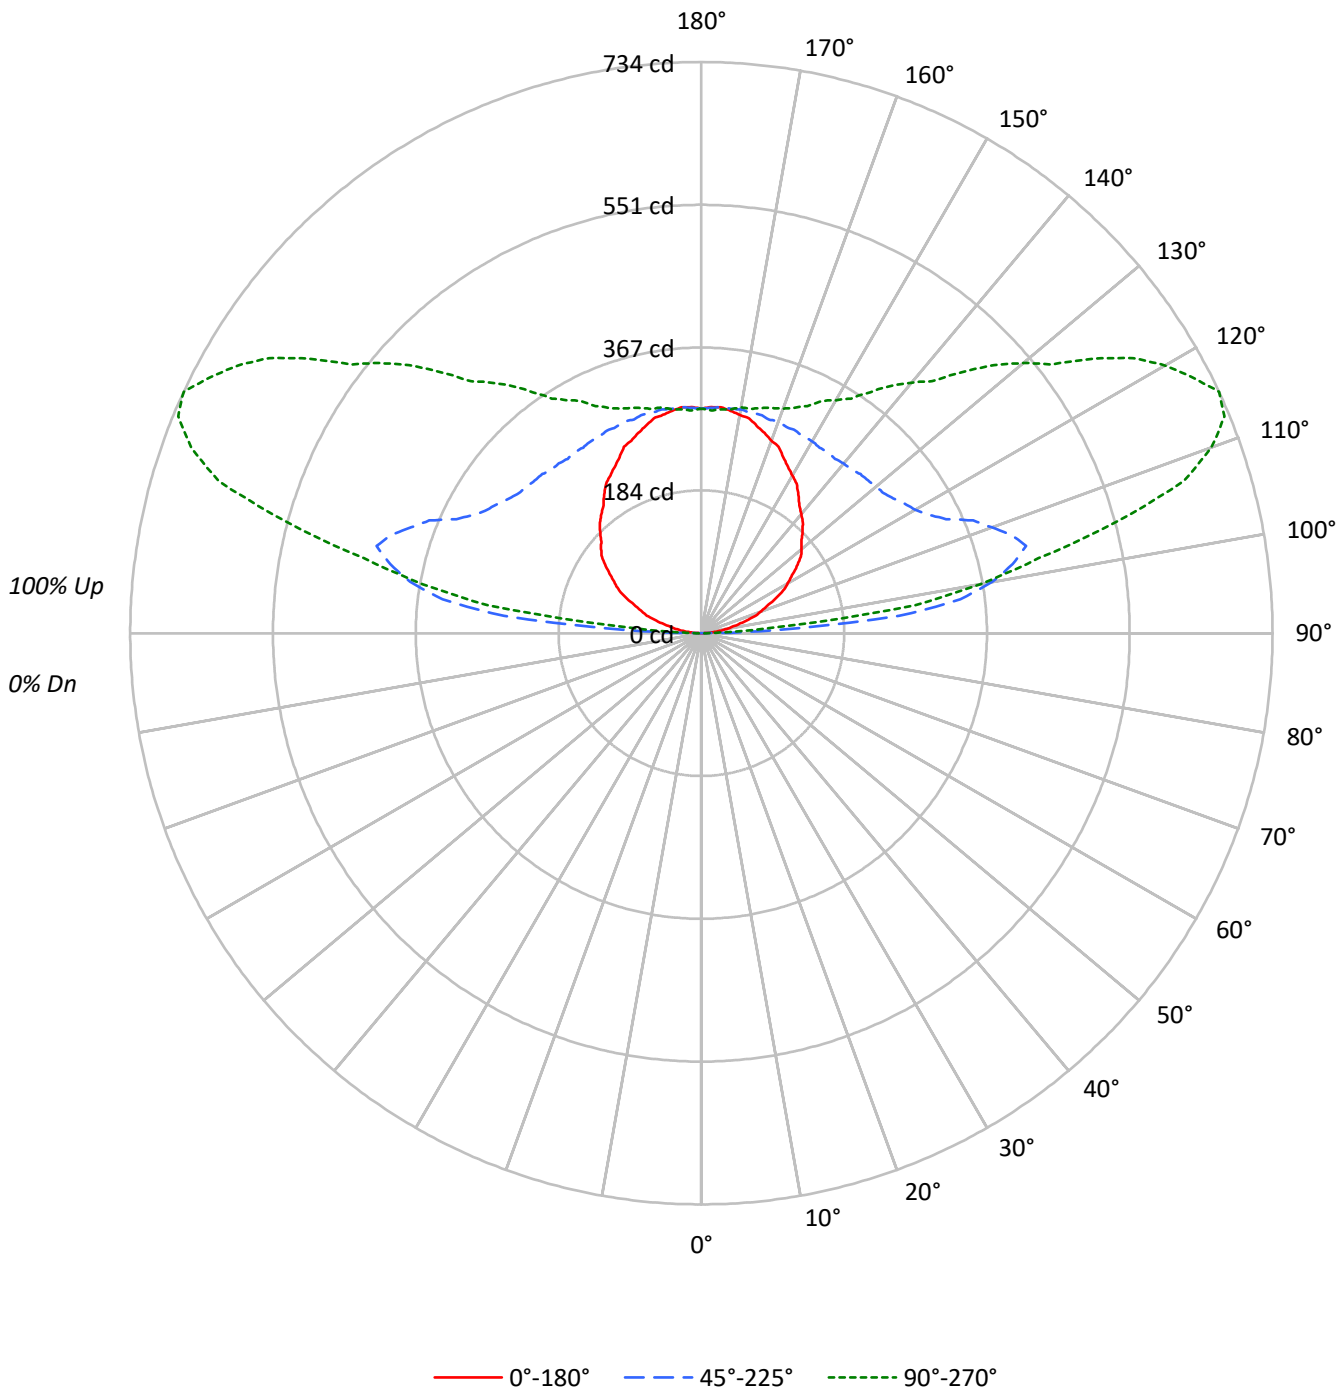



TEST NUMBER: P520909

CATALOG NUMBER: SQ4-025U-0D-93050-1D-UNV-STD-W-4 (4500K)

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20								20				20				20	
RC	80								50				30				10	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	95	95	95	95	81	81	81	81	56	56	56	32	32	32	10	10	10	0
1	87	83	79	76	74	71	68	65	48	47	45	28	27	26	9	9	8	0
2	79	72	66	62	67	62	57	53	42	40	37	24	23	22	8	7	7	0
3	72	63	57	51	61	54	49	44	37	34	31	21	20	18	7	6	6	0
4	65	56	48	43	56	48	42	37	33	29	26	19	17	16	6	6	5	0
5	60	49	42	36	51	42	36	32	29	25	22	17	15	13	5	5	4	0
6	55	44	36	31	47	38	32	27	26	22	19	15	13	11	5	4	4	0
7	50	39	32	27	43	34	28	23	23	19	17	14	11	10	4	4	3	0
8	47	35	28	23	40	30	24	20	21	17	14	12	10	9	4	3	3	0
9	43	32	25	20	37	27	22	18	19	15	13	11	9	8	4	3	3	0
10	40	29	22	18	34	25	19	16	17	14	11	10	8	7	3	3	2	0

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	0	0	0
5°	0	0	0
10°	0	0	0
15°	0	0	0
20°	0	0	0
25°	0	0	0
30°	0	0	0
35°	0	0	0
40°	0	0	0
45°	0	0	0
50°	0	0	0
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0



TEST NUMBER: P520909

CATALOG NUMBER: SQ4-025U-0D-93050-1D-UNV-STD-W-4 (4500K)

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	0.0	0.0
10°-20°	0.0	0.0
20°-30°	0.0	0.0
30°-40°	0.0	0.0
40°-50°	0.0	0.0
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	148.7	8.0
100°-110°	359.5	19.2
110°-120°	383.4	20.5
120°-130°	310.5	16.6
130°-140°	240.4	12.9
140°-150°	183.4	9.8
150°-160°	132.8	7.1
160°-170°	81.8	4.4
170°-180°	27.7	1.5
0°-30°	0.0	0.0
0°-40°	0.0	0.0
0°-60°	0.0	0.0
0°-90°	0.0	0.0
90°-120°	891.6	47.7
90°-150°	1626.0	87.0
90°-180°	1868.0	100.0
0°-180°	1868.2	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	0	0	0	0	0	
5°	0	0	0	0	0	0
15°	0	0	0	0	0	0
25°	0	0	0	0	0	0
35°	0	0	0	0	0	0
45°	0	0	0	0	0	0
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	1
95°	15	74	255	166	116	16
105°	57	99	432	559	552	61
115°	105	134	347	658	734	104
125°	150	172	301	523	615	134
135°	184	206	289	413	475	142
145°	218	234	284	351	378	136
155°	249	260	287	311	322	115
165°	276	280	291	295	300	78
175°	292	290	292	289	288	28
180°	288	288	288	288	288	



TEST NUMBER: P520909

CATALOG NUMBER: SQ4-025U-0D-93050-1D-UNV-STD-W-4 (4500K)

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	0.0	0.0	0.0	0.0	0.0
2.5°	0.0	0.0	0.0	0.0	0.0
5°	0.0	0.0	0.0	0.0	0.0
7.5°	0.0	0.0	0.0	0.0	0.0
10°	0.0	0.0	0.0	0.0	0.0
12.5°	0.0	0.0	0.0	0.0	0.0
15°	0.0	0.0	0.0	0.0	0.0
17.5°	0.0	0.0	0.0	0.0	0.0
20°	0.0	0.0	0.0	0.0	0.0
22.5°	0.0	0.0	0.0	0.0	0.0
25°	0.0	0.0	0.0	0.0	0.0
27.5°	0.0	0.0	0.0	0.0	0.0
30°	0.0	0.0	0.0	0.0	0.0
32.5°	0.0	0.0	0.0	0.0	0.0
35°	0.0	0.0	0.0	0.0	0.0
37.5°	0.0	0.0	0.0	0.0	0.0
40°	0.0	0.0	0.0	0.0	0.0
42.5°	0.0	0.0	0.0	0.0	0.0
45°	0.0	0.0	0.0	0.0	0.0
47.5°	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0
52.5°	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0
92.5°	4.9	40.3	94.8	46.1	31.3
95°	14.7	74.4	254.8	165.7	116.1
97.5°	26.0	82.4	335.6	323.3	277.6
100°	34.8	87.4	380.1	401.3	363.6
102.5°	43.1	91.9	409.5	466.1	443.8
105°	57.4	99.3	432.1	559.0	551.8
107.5°	71.5	108.0	418.7	633.5	650.4
110°	81.3	115.3	397.2	665.6	697.3



TEST NUMBER: P520909

CATALOG NUMBER: SQ4-025U-0D-93050-1D-UNV-STD-W-4 (4500K)

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	91.1	122.7	378.2	673.5	727.6
115°	105.1	134.4	347.1	658.1	734.0
117.5°	119.0	146.7	328.9	622.7	711.6
120°	128.3	154.0	317.2	594.9	688.1
122.5°	138.1	161.9	309.8	566.5	658.3
125°	149.7	172.4	301.3	523.4	614.8
127.5°	161.2	182.6	295.3	486.8	567.1
130°	168.1	189.0	293.3	461.4	540.2
132.5°	174.4	196.3	290.4	443.0	509.9
135°	183.9	205.5	289.1	412.7	474.8
137.5°	193.0	214.6	284.8	392.2	439.0
140°	199.8	219.6	284.8	377.4	420.5
142.5°	206.7	226.4	282.3	364.6	400.9
145°	217.6	233.7	283.6	350.8	378.3
147.5°	227.7	243.4	282.8	334.9	357.6
150°	234.1	247.8	284.8	328.0	345.9
152.5°	240.9	254.2	284.3	320.6	336.6
155°	249.3	260.1	287.2	310.7	322.1
157.5°	259.5	268.7	286.6	306.9	313.6
160°	263.4	271.2	289.1	302.0	306.8
162.5°	269.8	276.6	288.1	300.5	303.4
165°	275.6	279.8	290.9	295.3	299.5
167.5°	282.8	285.6	290.2	294.9	295.1
170°	284.8	286.6	292.1	291.6	294.6
172.5°	288.2	289.5	290.7	292.0	290.2
175°	291.5	290.3	291.5	289.0	288.5
177.5°	290.9	290.9	289.9	288.9	286.5
180°	288.5	288.5	288.5	288.5	288.5

(END OF REPORT)