

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P936365

Luminaire Tested: SQ4-FB-025U-075D-93050-1D-UNV-STD-W-8-3000K

Issue Date: 12/17/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P936365  
REPORT IS A COMBINATION OF REPORTS P933454 AND P933786  
Test Lab: INNOVATION CENTER  
Issue Date: 12/17/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ4-FB-025U-075D-93050-1D-UNV-STD-W-8-3000K  
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5926.8 lumens  
Efficiency: N/A  
Efficacy: 98.8 lumens/watt  
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33  
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 8' x H: 0.1')  
CIE Type: Semi-Direct  
  
Input Watts (W): 60  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P936365  
CATALOG NUMBER: SQ4-FB-025U-075D-93050-1D-UNV-STD-W-8-3000K

### Luminous Intensity Polar Plot

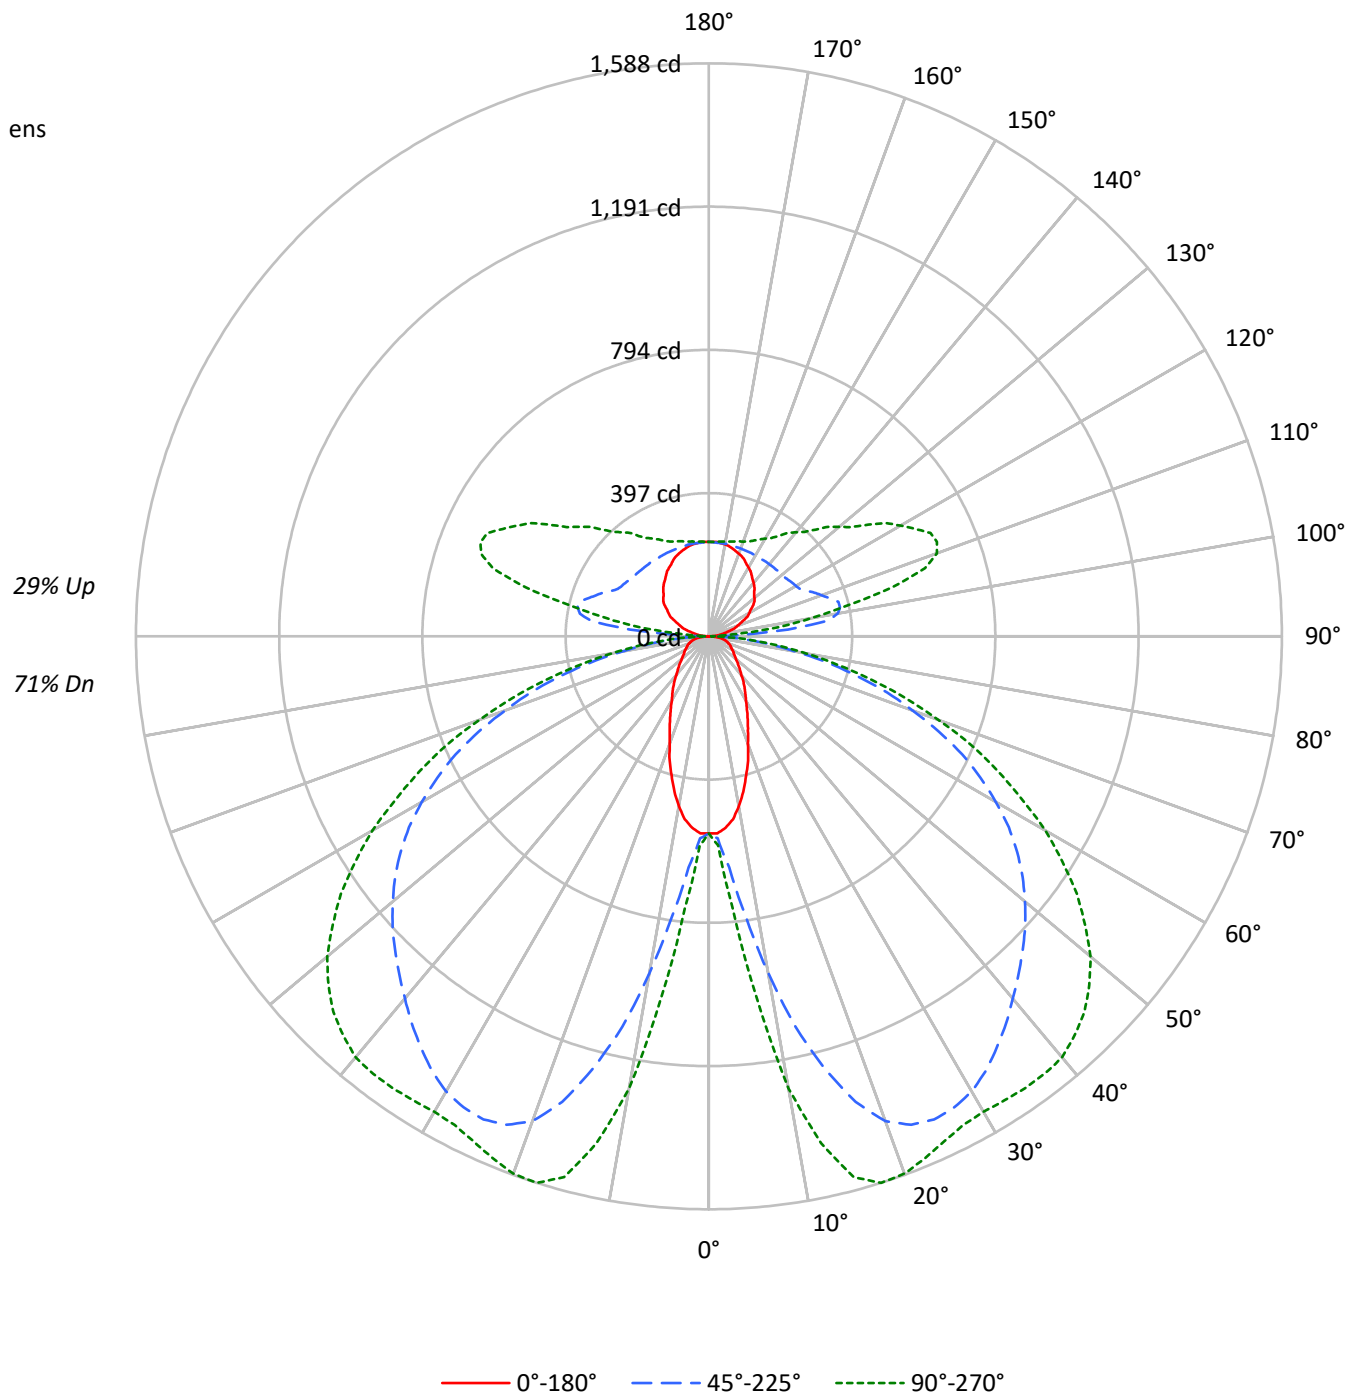



TEST NUMBER: P936365

CATALOG NUMBER: SQ4-FB-025U-075D-93050-1D-UNV-STD-W-8-3000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	112	112	112	112	106	106	106	106	95	95	95	85	85	85	76	76	76	71		
1	102	97	93	89	96	92	88	85	82	79	77	74	71	69	66	64	62	58		
2	92	84	77	71	87	79	73	68	71	66	62	64	60	57	57	54	51	48		
3	83	73	65	58	79	69	62	56	62	56	51	56	51	47	50	46	43	39		
4	76	64	55	49	71	61	53	47	55	48	43	49	44	39	44	40	36	33		
5	69	57	48	41	65	54	46	40	49	42	37	44	38	34	39	34	31	28		
6	64	51	42	35	60	48	40	34	43	37	32	39	33	29	35	30	27	24		
7	59	45	37	31	55	43	35	30	39	32	27	35	30	25	32	27	23	21		
8	54	41	33	27	51	39	31	26	36	29	24	32	26	22	29	24	21	18		
9	51	37	29	24	48	36	28	23	32	26	21	29	24	20	26	22	18	16		
10	47	34	26	21	45	33	25	21	30	23	19	27	22	18	24	20	16	14		

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	2535	2535	2535
5°	2476	2929	3407
10°	2246	4270	5649
15°	1909	5579	6821
20°	1554	6466	6951
25°	1296	6766	6810
30°	1093	6809	6797
35°	966	6696	6973
40°	842	6549	7155
45°	763	6441	7182
50°	700	6344	7064
55°	670	6203	6750
60°	686	5930	6256
65°	714	5516	5577
70°	761	4811	4711
75°	843	3922	3676
80°	921	2720	2477
85°	820	1443	1268

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 45°  
 Luminance: 7182 cd/sqm



TEST NUMBER: P936365

CATALOG NUMBER: SQ4-FB-025U-075D-93050-1D-UNV-STD-W-8-3000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	70.7	1.2
10°-20°	313.2	5.3
20°-30°	547.9	9.2
30°-40°	705.3	11.9
40°-50°	787.7	13.3
50°-60°	754.5	12.7
60°-70°	597.9	10.1
70°-80°	351.6	5.9
80°-90°	98.7	1.7
90°-100°	127.8	2.2
100°-110°	336.0	5.7
110°-120°	348.3	5.9
120°-130°	279.4	4.7
130°-140°	219.2	3.7
140°-150°	168.3	2.8
150°-160°	121.2	2.0
160°-170°	74.2	1.3
170°-180°	25.1	0.4
0°-30°	931.7	15.7
0°-40°	1637.0	27.6
0°-60°	3179.2	53.6
0°-90°	4227.4	71.3
90°-120°	812.1	13.7
90°-150°	1479.0	25.0
90°-180°	1699.0	28.7
0°-180°	5926.8	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	546	546	546	546	546	
5°	532	571	643	727	754	49
15°	399	736	1240	1504	1551	111
25°	255	834	1477	1542	1544	117
35°	172	798	1391	1470	1528	107
45°	118	636	1230	1409	1472	91
55°	84	404	1044	1212	1246	77
65°	67	214	775	871	884	66
75°	49	132	425	467	469	52
85°	18	40	105	116	118	19
90°	2	5	13	7	7	3
95°	17	66	220	114	77	19
105°	60	92	371	564	526	64
115°	108	130	298	594	677	106
125°	150	168	271	457	540	133
135°	178	196	262	369	418	138
145°	207	220	259	315	340	130
155°	234	240	259	284	292	107
165°	252	256	259	269	272	71
175°	262	262	261	264	264	25
180°	262	262	262	262	262	



TEST NUMBER: P936365

CATALOG NUMBER: SQ4-FB-025U-075D-93050-1D-UNV-STD-W-8-3000K

**CANDELA DISTRIBUTION (FULL):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	546.3	546.3	546.3	546.3	546.3	546.3	546.3	546.3	546.3	546.3	546.3
2.5°	546.3	546.3	549.8	551.6	555.1	556.8	560.4	563.9	574.4	576.2	579.7
5°	532.3	539.3	562.1	570.9	595.5	628.9	642.9	665.8	713.2	727.2	736.0
7.5°	511.2	527.0	583.2	597.2	658.7	746.6	783.4	832.6	908.2	945.1	974.9
10°	477.8	511.2	611.3	644.7	744.8	878.3	946.8	1015.4	1129.6	1180.5	1199.8
12.5°	440.9	495.4	641.2	686.8	830.9	1025.9	1108.5	1184.0	1314.0	1382.5	1393.1
15°	398.7	472.5	669.3	736.0	922.2	1148.9	1240.2	1333.3	1454.6	1503.7	1516.0
17.5°	361.9	455.0	695.6	765.9	992.5	1259.6	1352.7	1430.0	1528.3	1561.7	1570.5
20°	316.2	426.9	713.2	804.5	1066.3	1340.4	1430.0	1489.7	1556.4	1577.5	1581.0
22.5°	282.8	397.0	723.7	818.6	1115.5	1389.6	1465.1	1512.5	1558.2	1565.2	1567.0
25°	254.7	363.6	722.0	834.4	1157.7	1419.4	1477.4	1512.5	1538.9	1542.4	1542.4
27.5°	228.4	326.7	714.9	837.9	1189.3	1426.4	1472.1	1496.7	1509.0	1516.0	1516.0
30°	205.5	291.6	697.4	830.9	1203.4	1419.4	1456.3	1468.6	1480.9	1491.4	1496.7
32.5°	188.0	258.2	671.0	816.8	1205.1	1401.9	1428.2	1435.2	1452.8	1477.4	1486.2
35°	172.1	224.8	641.2	797.5	1194.6	1373.8	1391.3	1398.3	1433.5	1470.4	1482.7
37.5°	156.3	200.3	602.5	764.1	1178.8	1340.4	1352.7	1365.0	1419.4	1463.3	1477.4
40°	140.5	179.2	556.8	727.2	1154.2	1300.0	1310.5	1329.8	1401.9	1452.8	1466.9
42.5°	128.2	161.6	507.7	688.6	1122.6	1254.3	1270.1	1298.2	1380.8	1435.2	1451.0
45°	117.7	144.0	455.0	635.9	1082.2	1206.9	1229.7	1268.4	1356.2	1408.9	1422.9
47.5°	107.2	131.7	400.5	581.4	1038.2	1159.4	1189.3	1233.2	1322.8	1373.8	1386.0
50°	98.4	119.4	346.1	523.5	990.7	1108.5	1143.6	1189.3	1280.7	1328.1	1343.9
52.5°	91.3	108.9	295.1	465.5	936.3	1055.8	1096.2	1143.6	1229.7	1275.4	1285.9
55°	84.3	100.1	251.2	404.0	880.1	999.6	1043.5	1089.2	1173.5	1212.1	1219.2
57.5°	80.8	93.1	214.3	346.1	820.3	936.3	985.5	1027.7	1106.7	1136.6	1143.6
60°	75.5	87.8	186.2	296.9	755.3	876.5	918.7	960.9	1027.7	1052.3	1057.6
62.5°	70.3	84.3	165.1	249.4	688.6	806.3	848.4	887.1	943.3	960.9	967.9
65°	66.8	80.8	149.3	214.3	620.1	732.5	774.7	808.0	853.7	871.3	874.8
67.5°	63.2	77.3	137.0	184.4	551.6	658.7	690.3	722.0	757.1	774.7	776.4
70°	58.0	73.8	126.5	163.4	481.3	574.4	600.8	634.1	662.2	671.0	676.3
72.5°	54.5	68.5	119.4	147.6	409.3	493.6	518.2	537.5	562.1	570.9	570.9
75°	49.2	61.5	112.4	131.7	335.5	404.0	425.1	444.4	463.7	467.3	462.0
77.5°	43.9	54.5	96.6	110.7	261.7	319.7	337.3	347.8	363.6	367.1	368.9
80°	36.9	47.4	75.5	86.1	189.7	235.4	247.7	256.5	270.5	270.5	274.0
82.5°	28.1	36.9	54.5	61.5	128.2	161.6	172.1	177.4	186.2	186.2	186.2
85°	17.6	22.8	35.1	40.4	77.3	98.4	105.4	107.2	114.2	115.9	115.9
87.5°	8.8	12.3	22.8	24.6	40.4	50.9	50.9	54.5	54.5	52.7	50.9
90°	1.8	3.2	4.6	4.9	7.7	11.5	13.4	11.9	8.9	6.7	6.7
92.5°	7.0	19.0	31.0	34.0	47.8	66.1	75.3	66.0	47.4	33.5	32.1
95°	16.9	38.7	60.7	66.1	117.4	185.8	220.1	196.4	149.0	113.5	109.4
97.5°	29.2	48.6	67.8	72.6	158.2	272.3	329.4	314.4	284.5	262.0	254.4
100°	38.7	56.2	73.7	78.1	173.0	299.6	362.9	364.1	366.3	367.9	358.8
102.5°	46.8	63.1	79.5	83.5	179.9	308.3	372.5	391.5	429.7	458.3	450.5
105°	60.5	74.4	88.3	91.7	185.0	309.2	371.4	414.2	499.8	563.9	559.7
107.5°	74.6	87.5	100.4	103.6	185.8	295.5	350.3	409.9	529.3	618.8	619.8
110°	84.1	95.7	107.4	110.3	184.4	283.3	332.7	399.4	532.8	632.8	637.2



TEST NUMBER: P936365  
 CATALOG NUMBER: SQ4-FB-025U-075D-93050-1D-UNV-STD-W-8-3000K

**CANDELA DISTRIBUTION (continued):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	93.5	104.5	115.6	118.4	184.5	272.6	316.7	385.0	521.4	623.9	630.6
115°	107.5	117.7	128.0	130.5	186.2	260.4	297.5	363.3	494.8	593.5	602.8
117.5°	121.4	130.7	140.0	142.4	189.7	252.8	284.3	343.7	462.3	551.4	561.8
120°	129.5	138.2	147.0	149.2	192.5	250.2	279.0	333.2	441.7	523.0	533.0
122.5°	137.4	146.2	155.1	157.3	196.6	248.8	275.0	323.8	421.5	494.7	504.7
125°	149.6	157.7	165.6	167.7	202.0	247.8	270.6	312.1	395.1	457.2	466.4
127.5°	159.4	167.5	175.7	177.7	207.5	247.1	266.9	302.6	373.8	427.2	434.9
130°	164.7	173.5	182.2	184.4	211.4	247.5	265.5	297.2	360.6	408.1	415.3
132.5°	170.1	178.9	187.6	189.8	214.7	247.8	264.3	292.6	349.4	392.0	398.4
135°	178.2	186.2	194.2	196.2	218.2	247.5	262.2	286.0	333.5	369.1	374.6
137.5°	186.5	194.4	202.3	204.3	223.4	249.0	261.8	281.9	322.1	352.2	356.7
140°	193.3	200.6	207.9	209.7	226.7	249.3	260.6	278.0	312.7	338.7	342.9
142.5°	198.7	205.3	212.1	213.8	229.4	250.2	260.6	275.9	306.4	329.2	332.8
145°	206.8	212.6	218.4	219.9	232.9	250.2	258.8	271.3	296.3	315.0	317.7
147.5°	214.8	220.5	226.3	227.7	238.0	251.9	258.8	268.7	288.3	302.9	305.2
150°	220.1	225.3	230.4	231.7	240.7	252.8	258.8	267.1	283.7	296.1	297.9
152.5°	225.5	229.4	233.4	234.3	242.5	253.4	258.8	265.9	280.0	290.6	292.0
155°	233.6	236.5	239.4	240.1	246.4	254.7	258.8	264.5	275.7	284.1	285.0
157.5°	239.6	242.4	245.2	245.9	250.2	255.9	258.8	263.2	271.9	278.5	279.1
160°	243.6	245.8	248.0	248.6	252.0	256.6	258.8	262.6	270.1	275.7	276.1
162.5°	247.7	249.3	250.9	251.4	253.8	257.2	258.8	262.0	268.3	273.1	273.4
165°	252.2	253.7	255.1	255.5	256.6	258.1	258.8	261.1	265.6	269.0	269.4
167.5°	256.2	256.9	257.6	257.8	258.7	260.0	260.6	262.1	265.1	267.3	267.4
170°	258.8	259.5	260.2	260.4	260.5	260.6	260.6	262.1	265.1	267.3	267.3
172.5°	260.2	260.4	260.6	260.6	260.6	260.6	260.6	261.7	264.1	265.9	265.7
175°	262.2	262.2	262.2	262.2	261.6	260.9	260.6	261.3	262.8	263.9	263.9
177.5°	262.2	262.2	262.2	262.2	261.7	261.2	260.9	261.6	262.7	263.6	263.4
180°	262.2	262.2	262.2	262.2	262.2	262.2	262.2	262.2	262.2	262.2	262.2



TEST NUMBER: P936365

CATALOG NUMBER: SQ4-FB-025U-075D-93050-1D-UNV-STD-W-8-3000K

**CANDELA DISTRIBUTION (continued):**

	80°	90°
0°	546.3	546.3
2.5°	583.2	579.7
5°	750.1	753.6
7.5°	1010.1	1008.4
10°	1256.1	1271.9
12.5°	1435.2	1438.7
15°	1544.1	1551.2
17.5°	1586.3	1588.1
20°	1588.1	1584.5
22.5°	1568.7	1565.2
25°	1545.9	1544.1
27.5°	1524.8	1526.6
30°	1516.0	1521.3
32.5°	1516.0	1524.8
35°	1519.5	1528.3
37.5°	1517.8	1528.3
40°	1510.8	1523.1
42.5°	1491.4	1500.2
45°	1461.6	1472.1
47.5°	1422.9	1430.0
50°	1373.8	1380.8
52.5°	1312.3	1314.0
55°	1238.5	1245.5
57.5°	1159.4	1161.2
60°	1071.6	1076.9
62.5°	978.4	978.4
65°	880.1	883.6
67.5°	778.2	787.0
70°	674.5	676.3
72.5°	572.7	572.7
75°	467.3	469.0
77.5°	367.1	367.1
80°	272.3	274.0
82.5°	188.0	191.5
85°	117.7	117.7
87.5°	54.5	49.2
90°	6.7	6.7
92.5°	26.8	21.4
95°	93.4	77.2
97.5°	223.6	193.0
100°	322.2	285.7
102.5°	419.2	387.9
105°	542.9	526.0
107.5°	623.9	627.9
110°	654.7	672.3





TEST NUMBER: P936365

CATALOG NUMBER: SQ4-FB-025U-075D-93050-1D-UNV-STD-W-8-3000K

**CANDELA DISTRIBUTION (continued):**

	80°	90°
112.5°	657.5	684.4
115°	640.1	677.3
117.5°	603.1	644.5
120°	573.3	613.5
122.5°	544.3	583.9
125°	502.9	539.5
127.5°	465.7	496.5
130°	443.7	472.2
132.5°	423.9	449.3
135°	396.6	418.5
137.5°	374.7	392.7
140°	359.7	376.5
142.5°	347.3	361.7
145°	328.7	339.6
147.5°	314.3	323.4
150°	305.3	312.7
152.5°	297.6	303.1
155°	288.7	292.4
157.5°	281.8	284.3
160°	277.5	279.0
162.5°	274.8	276.2
165°	270.9	272.4
167.5°	268.1	268.7
170°	267.3	267.3
172.5°	265.2	264.6
175°	263.9	263.9
177.5°	262.8	262.2
180°	262.2	262.2



TEST NUMBER: P936365

CATALOG NUMBER: SQ4-FB-025U-075D-93050-1D-UNV-STD-W-8-3000K

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.98	7.13	6.72	7.90	8.83	19.16	20.31	19.90	21.08	22.01
	3H	6.70	7.74	7.46	8.52	9.48	21.02	22.06	21.77	22.84	23.79
	4H	7.02	8.00	7.79	8.79	9.76	21.67	22.66	22.45	23.45	24.42
	6H	7.28	8.19	8.07	8.99	9.97	22.12	23.03	22.91	23.83	24.81
	8H	7.36	8.23	8.15	9.04	10.03	22.25	23.12	23.04	23.94	24.92
	12H	7.39	8.21	8.19	9.03	10.04	22.33	23.16	23.13	23.97	24.98
4H	2H	13.23	14.21	14.00	15.00	15.97	19.46	20.45	20.24	21.24	22.21
	3H	14.82	15.65	15.61	16.47	17.46	21.54	22.36	22.33	23.19	24.17
	4H	14.93	15.68	15.73	16.50	17.52	22.32	23.07	23.12	23.89	24.90
	6H	14.96	15.61	15.78	16.46	17.48	22.87	23.53	23.69	24.37	25.39
	8H	14.94	15.55	15.77	16.40	17.43	23.04	23.66	23.87	24.50	25.53
	12H	14.91	15.47	15.76	16.33	17.37	23.15	23.70	24.00	24.57	25.60
8H	4H	16.40	17.01	17.22	17.85	18.88	22.40	23.01	23.23	23.86	24.89
	6H	16.65	17.16	17.51	18.05	19.08	23.04	23.55	23.90	24.44	25.47
	8H	16.68	17.13	17.54	18.01	19.06	23.27	23.72	24.13	24.60	25.65
	12H	16.66	17.06	17.53	17.93	19.03	23.43	23.83	24.30	24.70	25.80
12H	4H	16.56	17.11	17.40	17.97	19.01	22.37	22.92	23.21	23.78	24.82
	6H	16.92	17.37	17.78	18.25	19.30	23.03	23.49	23.90	24.36	25.41
	8H	17.00	17.40	17.87	18.27	19.37	23.28	23.68	24.14	24.55	25.65