

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P936455

Luminaire Tested: SQ4-FB-025U-100D-93050-1D-UNV-STD-W-12-4000K

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P936455
REPORT IS A COMBINATION OF REPORTS P933431 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-025U-100D-93050-1D-UNV-STD-W-12-4000K
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 11260.2 lumens
Efficiency: N/A
Efficacy: 96.7 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 12' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 116.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P936455
CATALOG NUMBER: SQ4-FB-025U-100D-93050-1D-UNV-STD-W-12-4000K

Luminous Intensity Polar Plot

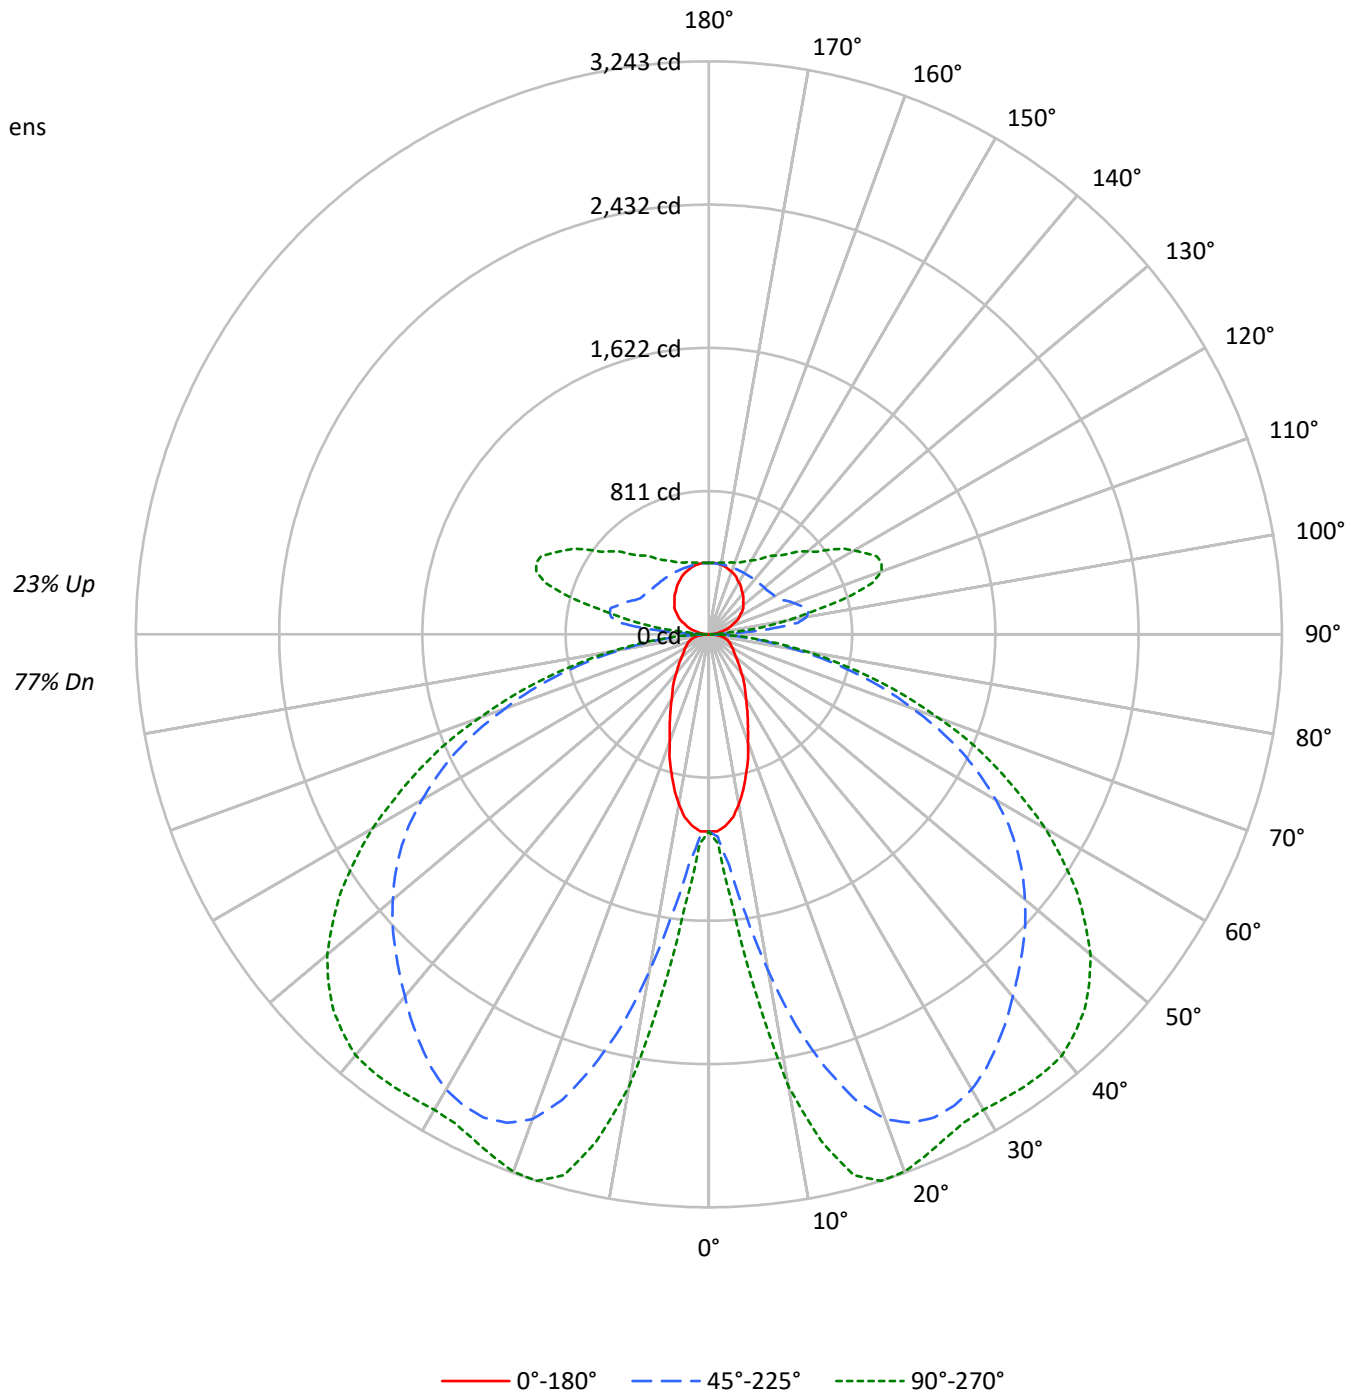



TEST NUMBER: P936455

CATALOG NUMBER: SQ4-FB-025U-100D-93050-1D-UNV-STD-W-12-4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	113	113	113	113	108	108	108	108	98	98	98	89	89	89	81	81	81	77				77
1	103	98	94	90	98	94	90	86	85	82	79	77	75	73	70	68	66	63				63
2	93	85	78	72	88	81	75	69	73	68	64	67	63	59	61	57	55	51				51
3	84	74	65	59	80	70	63	57	64	58	53	58	53	49	53	49	45	42				42
4	77	65	56	49	73	62	54	47	56	50	44	51	46	41	47	42	38	35				35
5	70	57	48	42	66	55	46	40	50	43	38	46	40	35	41	37	33	30				30
6	64	51	42	36	61	49	41	35	45	38	32	41	35	30	37	32	28	26				26
7	59	46	37	31	56	44	36	30	40	33	28	37	31	27	34	29	25	22				22
8	55	42	33	27	52	40	32	26	37	30	25	34	28	23	31	26	22	20				20
9	51	38	30	24	49	36	29	23	33	27	22	31	25	21	28	23	19	17				17
10	48	35	27	21	45	33	26	21	31	24	20	28	23	19	26	21	17	16				16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3451	3451	3451
5°	3373	3990	4639
10°	3061	5818	7691
15°	2602	7602	9287
20°	2119	8812	9464
25°	1768	9223	9272
30°	1492	9284	9254
35°	1320	9132	9494
40°	1151	8934	9741
45°	1043	8790	9779
50°	957	8661	9617
55°	918	8471	9191
60°	940	8103	8518
65°	980	7541	7593
70°	1047	6581	6415
75°	1165	5370	5006
80°	1281	3729	3373
85°	1160	1981	1727

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 9779 cd/sqm



TEST NUMBER: P936455

CATALOG NUMBER: SQ4-FB-025U-100D-93050-1D-UNV-STD-W-12-4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	144.3	1.3
10°-20°	639.7	5.7
20°-30°	1118.9	9.9
30°-40°	1440.3	12.8
40°-50°	1608.8	14.3
50°-60°	1540.9	13.7
60°-70°	1221.1	10.8
70°-80°	718.1	6.4
80°-90°	201.0	1.8
90°-100°	197.5	1.8
100°-110°	519.3	4.6
110°-120°	538.5	4.8
120°-130°	431.9	3.8
130°-140°	338.9	3.0
140°-150°	260.1	2.3
150°-160°	187.3	1.7
160°-170°	114.6	1.0
170°-180°	38.7	0.3
0°-30°	1902.9	16.9
0°-40°	3343.2	29.7
0°-60°	6492.9	57.7
0°-90°	8633.2	76.7
90°-120°	1255.4	11.1
90°-150°	2286.3	20.3
90°-180°	2627.0	23.3
0°-180°	11260.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1116	1116	1116	1116	1116	
5°	1087	1166	1313	1485	1539	100
15°	814	1503	2533	3071	3168	227
25°	520	1704	3017	3150	3154	240
35°	352	1629	2842	3003	3121	220
45°	240	1299	2511	2877	3006	186
55°	172	825	2131	2476	2544	157
65°	136	438	1582	1780	1805	135
75°	100	269	868	954	958	105
85°	36	83	215	237	240	38
90°	3	8	21	10	10	5
95°	26	102	340	175	119	29
105°	94	142	574	872	813	99
115°	166	202	460	917	1047	164
125°	231	259	418	707	834	205
135°	276	303	405	571	647	213
145°	320	340	400	487	525	200
155°	361	371	400	439	452	166
165°	390	395	400	416	421	110
175°	405	405	403	408	408	38
180°	405	405	405	405	405	



TEST NUMBER: P936455

CATALOG NUMBER: SQ4-FB-025U-100D-93050-1D-UNV-STD-W-12-4000K

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	1115.8	1115.8	1115.8	1115.8	1115.8	1115.8	1115.8	1115.8	1115.8	1115.8	1115.8
2.5°	1115.8	1115.8	1122.9	1126.6	1133.7	1137.3	1144.5	1151.6	1173.2	1176.8	1184.0
5°	1087.1	1101.4	1148.1	1166.0	1216.3	1284.4	1313.1	1359.7	1456.6	1485.3	1503.2
7.5°	1044.0	1076.3	1191.1	1219.8	1345.3	1524.7	1600.1	1700.5	1854.9	1930.2	1991.2
10°	975.9	1044.0	1248.5	1316.6	1521.2	1793.8	1933.8	2073.7	2306.9	2410.9	2450.4
12.5°	900.5	1011.7	1309.5	1402.8	1697.0	2095.2	2263.8	2418.1	2683.6	2823.6	2845.0
15°	814.4	965.1	1366.9	1503.2	1883.5	2346.4	2532.9	2723.1	2970.6	3071.0	3096.2
17.5°	739.1	929.2	1420.7	1564.2	2027.0	2572.4	2762.6	2920.4	3121.3	3189.4	3207.4
20°	645.7	871.9	1456.6	1643.1	2177.7	2737.4	2920.4	3042.3	3178.7	3221.7	3228.9
22.5°	577.6	810.8	1478.1	1671.8	2278.2	2837.9	2992.1	3089.0	3182.3	3196.7	3200.2
25°	520.2	742.7	1474.5	1704.1	2364.3	2898.9	3017.3	3089.0	3142.8	3150.0	3150.0
27.5°	466.4	667.3	1460.2	1711.3	2428.9	2913.2	3006.5	3056.7	3081.8	3096.2	3096.2
30°	419.7	595.6	1424.3	1697.0	2457.6	2898.9	2974.2	2999.3	3024.4	3046.0	3056.7
32.5°	383.9	527.3	1370.5	1668.3	2461.1	2863.0	2916.8	2931.2	2967.0	3017.3	3035.2
35°	351.6	459.2	1309.5	1628.8	2439.6	2805.5	2841.5	2855.8	2927.6	3002.9	3028.0
37.5°	319.3	409.0	1230.6	1560.7	2407.4	2737.4	2762.6	2787.6	2898.9	2988.6	3017.3
40°	287.0	366.0	1137.3	1485.3	2357.1	2654.9	2676.4	2715.8	2863.0	2967.0	2995.7
42.5°	261.9	330.1	1036.9	1406.3	2292.5	2561.6	2593.9	2651.3	2819.9	2931.2	2963.4
45°	240.4	294.2	929.2	1298.7	2210.0	2464.8	2511.4	2590.3	2769.7	2877.3	2906.0
47.5°	218.9	269.1	818.0	1187.6	2120.3	2367.9	2428.9	2518.5	2701.5	2805.5	2830.7
50°	200.9	243.9	706.7	1069.2	2023.5	2263.8	2335.6	2428.9	2615.5	2712.3	2744.6
52.5°	186.6	222.4	602.7	950.8	1912.2	2156.2	2238.7	2335.6	2511.4	2604.7	2626.2
55°	172.3	204.5	513.0	825.1	1797.5	2041.4	2131.1	2224.3	2396.6	2475.5	2489.8
57.5°	165.0	190.2	437.7	706.7	1675.5	1912.2	2012.7	2098.8	2260.3	2321.2	2335.6
60°	154.2	179.4	380.3	606.3	1542.7	1790.2	1876.4	1962.5	2098.8	2149.0	2159.8
62.5°	143.5	172.3	337.3	509.4	1406.3	1646.8	1732.8	1811.8	1926.6	1962.5	1976.8
65°	136.3	165.0	304.9	437.7	1266.5	1496.1	1582.1	1650.4	1743.6	1779.5	1786.7
67.5°	129.2	157.9	279.9	376.7	1126.6	1345.3	1410.0	1474.5	1546.3	1582.1	1585.8
70°	118.4	150.7	258.3	333.6	983.0	1173.2	1227.0	1295.2	1352.6	1370.5	1381.3
72.5°	111.2	139.9	243.9	301.3	835.9	1008.2	1058.4	1097.9	1148.1	1166.0	1166.0
75°	100.5	125.5	229.6	269.1	685.2	825.1	868.2	907.7	947.2	954.3	943.5
77.5°	89.7	111.2	197.3	226.0	534.6	653.0	688.8	710.4	742.7	749.8	753.5
80°	75.3	96.9	154.2	175.8	387.5	480.7	505.9	523.8	552.5	552.5	559.7
82.5°	57.4	75.3	111.2	125.5	261.9	330.1	351.6	362.3	380.3	380.3	380.3
85°	35.8	46.6	71.8	82.6	157.9	200.9	215.2	218.9	233.2	236.8	236.8
87.5°	17.9	25.1	46.6	50.2	82.6	104.0	104.0	111.2	111.2	107.6	104.0
90°	2.7	4.9	7.1	7.6	11.9	17.7	20.6	18.4	13.8	10.3	10.3
92.5°	10.9	29.3	47.9	52.5	73.8	102.2	116.4	102.0	73.2	51.7	49.6
95°	26.1	59.9	93.8	102.3	181.6	287.4	340.3	303.6	230.4	175.4	169.2
97.5°	45.2	75.0	104.9	112.3	244.6	421.0	509.2	486.0	439.7	405.0	393.1
100°	59.8	86.9	114.0	120.7	267.6	463.3	561.1	562.8	566.2	568.7	554.6
102.5°	72.3	97.6	122.8	129.2	278.1	476.6	575.8	605.3	664.2	708.5	696.3
105°	93.6	115.0	136.3	141.7	285.8	478.0	574.1	640.2	772.5	871.7	865.2
107.5°	115.3	135.2	155.2	160.2	287.3	456.7	541.5	633.7	818.2	956.6	958.1
110°	130.0	148.0	166.0	170.5	285.1	437.9	514.3	617.4	823.6	978.3	985.1



TEST NUMBER: P936455

CATALOG NUMBER: SQ4-FB-025U-100D-93050-1D-UNV-STD-W-12-4000K

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	144.5	161.6	178.8	183.0	285.2	421.4	489.6	595.1	806.1	964.4	974.9
115°	166.2	182.0	197.9	201.9	287.8	402.5	459.9	561.6	764.9	917.4	931.8
117.5°	187.6	202.0	216.4	220.0	293.2	390.8	439.5	531.3	714.8	852.4	868.4
120°	200.1	213.7	227.3	230.6	297.5	386.7	431.3	515.1	682.9	808.6	824.1
122.5°	212.4	226.1	239.7	243.1	303.8	384.6	425.1	500.6	651.5	764.8	780.1
125°	231.2	243.7	256.2	259.2	312.3	383.0	418.3	482.4	610.6	706.8	721.0
127.5°	246.4	259.0	271.5	274.7	320.7	382.0	412.6	467.6	577.8	660.3	672.3
130°	254.5	268.1	281.7	285.0	326.9	382.5	410.4	459.5	557.5	631.0	642.0
132.5°	263.0	276.5	290.1	293.5	331.8	383.0	408.5	452.4	540.2	606.0	615.9
135°	275.5	287.8	300.2	303.2	337.3	382.6	405.2	442.0	515.5	570.6	579.1
137.5°	288.3	300.5	312.6	315.7	345.4	385.0	404.7	435.7	497.8	544.5	551.4
140°	298.9	310.1	321.4	324.2	350.4	385.3	402.8	429.6	483.3	523.5	530.1
142.5°	307.0	317.4	327.8	330.5	354.6	386.7	402.8	426.3	473.5	508.9	514.5
145°	319.6	328.7	337.7	340.0	360.0	386.7	400.1	419.4	457.9	486.8	491.0
147.5°	332.1	340.9	349.8	351.9	367.9	389.4	400.1	415.3	445.6	468.3	471.9
150°	340.3	348.2	356.2	358.2	372.1	390.8	400.1	412.9	438.6	457.7	460.5
152.5°	348.7	354.7	360.7	362.2	374.8	391.7	400.1	411.0	432.9	449.3	451.5
155°	361.2	365.6	370.1	371.2	380.8	393.7	400.1	408.8	426.2	439.3	440.7
157.5°	370.4	374.7	379.2	380.3	386.9	395.6	400.1	406.9	420.4	430.5	431.5
160°	376.7	380.1	383.5	384.3	389.6	396.6	400.1	405.9	417.5	426.1	426.7
162.5°	383.0	385.5	388.0	388.7	392.5	397.5	400.1	405.0	414.7	422.1	422.6
165°	389.8	392.0	394.4	394.9	396.6	398.9	400.1	403.6	410.6	415.8	416.4
167.5°	396.0	397.1	398.2	398.5	399.9	401.8	402.8	405.1	409.7	413.1	413.4
170°	400.1	401.2	402.3	402.5	402.6	402.7	402.8	405.1	409.7	413.1	413.1
172.5°	402.3	402.5	402.7	402.8	402.8	402.8	402.8	404.6	408.2	410.9	410.8
175°	405.2	405.2	405.2	405.2	404.4	403.3	402.8	404.0	406.2	408.0	408.0
177.5°	405.2	405.2	405.2	405.2	404.6	403.8	403.3	404.2	406.1	407.4	407.1
180°	405.2	405.2	405.2	405.2	405.2	405.2	405.2	405.2	405.2	405.2	405.2



TEST NUMBER: P936455

CATALOG NUMBER: SQ4-FB-025U-100D-93050-1D-UNV-STD-W-12-4000K

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	1115.8	1115.8
2.5°	1191.1	1184.0
5°	1532.0	1539.1
7.5°	2063.0	2059.3
10°	2565.2	2597.5
12.5°	2931.2	2938.3
15°	3153.6	3168.0
17.5°	3239.7	3243.3
20°	3243.3	3236.1
22.5°	3203.8	3196.7
25°	3157.2	3153.6
27.5°	3114.1	3117.7
30°	3096.2	3107.0
32.5°	3096.2	3114.1
35°	3103.3	3121.3
37.5°	3099.7	3121.3
40°	3085.4	3110.5
42.5°	3046.0	3063.9
45°	2984.9	3006.5
47.5°	2906.0	2920.4
50°	2805.5	2819.9
52.5°	2680.0	2683.6
55°	2529.3	2543.7
57.5°	2367.9	2371.4
60°	2188.5	2199.3
62.5°	1998.3	1998.3
65°	1797.5	1804.6
67.5°	1589.4	1607.3
70°	1377.7	1381.3
72.5°	1169.6	1169.6
75°	954.3	957.9
77.5°	749.8	749.8
80°	556.1	559.7
82.5°	383.9	391.0
85°	240.4	240.4
87.5°	111.2	100.5
90°	10.3	10.3
92.5°	41.5	33.2
95°	144.3	119.4
97.5°	345.8	298.3
100°	498.2	441.7
102.5°	648.0	599.7
105°	839.2	813.2
107.5°	964.4	970.7
110°	1012.2	1039.2



TEST NUMBER: P936455

CATALOG NUMBER: SQ4-FB-025U-100D-93050-1D-UNV-STD-W-12-4000K

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	1016.4	1058.0
115°	989.4	1047.1
117.5°	932.3	996.2
120°	886.2	948.3
122.5°	841.4	902.7
125°	777.4	833.8
127.5°	719.9	767.5
130°	686.0	730.0
132.5°	655.2	694.6
135°	613.1	647.0
137.5°	579.2	607.1
140°	556.0	582.0
142.5°	536.9	559.2
145°	508.0	524.9
147.5°	485.9	499.9
150°	472.0	483.3
152.5°	460.0	468.6
155°	446.3	452.0
157.5°	435.6	439.5
160°	429.0	431.3
162.5°	424.8	427.0
165°	418.7	421.0
167.5°	414.3	415.3
170°	413.1	413.1
172.5°	409.9	409.0
175°	408.0	408.0
177.5°	406.2	405.2
180°	405.2	405.2



TEST NUMBER: P936455
 CATALOG NUMBER: SQ4-FB-025U-100D-93050-1D-UNV-STD-W-12-4000K

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.44	8.68	8.13	9.38	10.21	20.64	21.87	21.32	22.58	23.40
	3H	8.18	9.29	8.87	10.01	10.87	22.51	23.62	23.20	24.34	25.20
	4H	8.49	9.55	9.20	10.27	11.14	23.17	24.23	23.89	24.95	25.83
	6H	8.76	9.74	9.49	10.47	11.36	23.63	24.60	24.35	25.34	26.23
	8H	8.84	9.77	9.58	10.53	11.42	23.76	24.69	24.50	25.45	26.34
	12H	8.87	9.76	9.61	10.51	11.43	23.84	24.73	24.59	25.48	26.40
4H	2H	14.71	15.76	15.43	16.49	17.36	20.95	22.01	21.67	22.73	23.61
	3H	16.31	17.20	17.04	17.96	18.85	23.04	23.92	23.77	24.68	25.58
	4H	16.42	17.23	17.17	17.99	18.91	23.82	24.63	24.57	25.39	26.31
	6H	16.45	17.16	17.22	17.94	18.87	24.39	25.09	25.15	25.88	26.81
	8H	16.44	17.10	17.21	17.88	18.82	24.56	25.22	25.33	26.01	26.95
	12H	16.42	17.01	17.21	17.82	18.76	24.68	25.27	25.47	26.08	27.03
8H	4H	17.90	18.56	18.67	19.34	20.28	23.92	24.57	24.68	25.36	26.30
	6H	18.16	18.71	18.96	19.53	20.48	24.57	25.11	25.37	25.94	26.88
	8H	18.19	18.67	18.99	19.50	20.46	24.80	25.28	25.61	26.11	27.07
	12H	18.17	18.60	18.98	19.42	20.43	24.96	25.39	25.77	26.21	27.22
12H	4H	18.07	18.66	18.86	19.47	20.41	23.89	24.48	24.68	25.29	26.23
	6H	18.43	18.91	19.24	19.74	20.70	24.56	25.04	25.36	25.87	26.83
	8H	18.51	18.94	19.33	19.76	20.78	24.81	25.24	25.62	26.05	27.07