

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P936462

Luminaire Tested: SQ4-FB-025U-100D-93050-1D-UNV-STD-W-6-3500K

Issue Date: 12/17/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P936462  
REPORT IS A COMBINATION OF REPORTS P933447 AND P933786  
Test Lab: INNOVATION CENTER  
Issue Date: 12/17/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ4-FB-025U-100D-93050-1D-UNV-STD-W-6-3500K  
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5568.8 lumens  
Efficiency: N/A  
Efficacy: 95.7 lumens/watt  
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33  
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 6' x H: 0.1')  
CIE Type: Semi-Direct  
  
Input Watts (W): 58.2  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P936462  
CATALOG NUMBER: SQ4-FB-025U-100D-93050-1D-UNV-STD-W-6-3500K

### Luminous Intensity Polar Plot

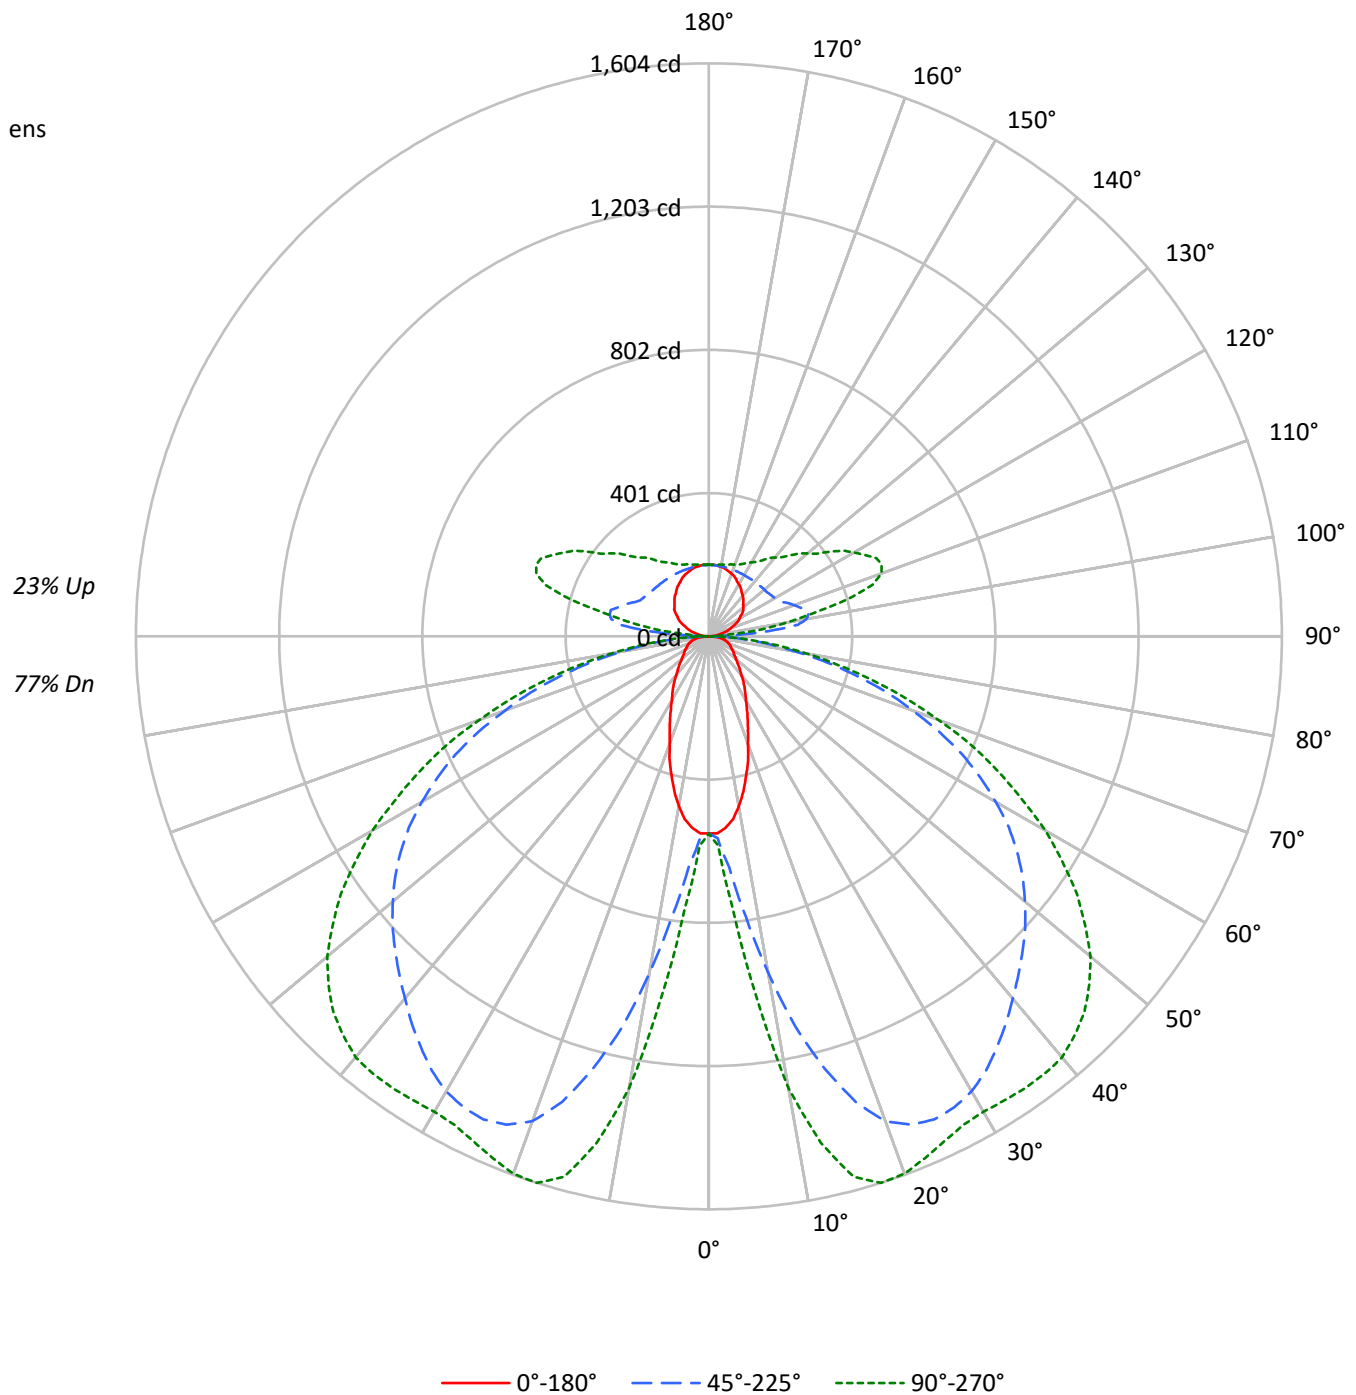



TEST NUMBER: P936462

CATALOG NUMBER: SQ4-FB-025U-100D-93050-1D-UNV-STD-W-6-3500K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	113	113	113	113	108	108	108	108	98	98	98	89	89	89	81	81	81	77			77
1	103	98	94	90	98	94	90	86	85	82	79	77	75	73	70	68	66	63			63
2	93	85	78	72	88	81	75	69	73	68	64	67	63	59	61	57	55	51			51
3	84	74	65	59	80	70	63	57	64	58	53	58	53	49	53	49	45	42			42
4	77	65	56	49	73	62	54	47	56	50	44	51	46	41	47	42	38	35			35
5	70	57	48	42	66	55	46	40	50	43	38	46	40	35	41	37	33	30			30
6	64	51	42	36	61	49	41	35	45	38	32	41	35	30	37	32	28	26			26
7	59	46	37	31	56	44	36	30	40	33	28	37	31	27	34	29	25	22			22
8	55	42	33	27	52	40	32	26	37	30	25	34	28	23	31	26	22	20			20
9	51	38	30	24	49	36	29	23	33	27	22	31	25	21	28	23	19	17			17
10	48	35	27	21	45	33	26	21	31	24	20	28	23	19	26	21	17	16			16

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3414	3414	3414
5°	3334	3944	4588
10°	3023	5749	7607
15°	2568	7508	9185
20°	2090	8699	9361
25°	1743	9101	9171
30°	1469	9156	9153
35°	1298	9002	9391
40°	1130	8801	9635
45°	1023	8654	9672
50°	938	8521	9512
55°	896	8328	9091
60°	918	7958	8425
65°	953	7398	7510
70°	1013	6447	6344
75°	1118	5253	4951
80°	1211	3639	3336
85°	1055	1928	1708

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 45°  
 Luminance: 9672 cd/sqm



TEST NUMBER: P936462

CATALOG NUMBER: SQ4-FB-025U-100D-93050-1D-UNV-STD-W-6-3500K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	71.4	1.3
10°-20°	316.4	5.7
20°-30°	553.4	9.9
30°-40°	712.3	12.8
40°-50°	795.7	14.3
50°-60°	762.1	13.7
60°-70°	603.9	10.8
70°-80°	355.1	6.4
80°-90°	99.4	1.8
90°-100°	97.7	1.8
100°-110°	256.8	4.6
110°-120°	266.3	4.8
120°-130°	213.6	3.8
130°-140°	167.6	3.0
140°-150°	128.6	2.3
150°-160°	92.7	1.7
160°-170°	56.7	1.0
170°-180°	19.2	0.3
0°-30°	941.1	16.9
0°-40°	1653.4	29.7
0°-60°	3211.1	57.7
0°-90°	4269.6	76.7
90°-120°	620.8	11.1
90°-150°	1130.7	20.3
90°-180°	1299.0	23.3
0°-180°	5568.8	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	552	552	552	552	552	
5°	538	577	649	735	761	50
15°	403	744	1253	1519	1567	112
25°	257	843	1492	1558	1560	119
35°	174	806	1405	1485	1544	109
45°	119	642	1242	1423	1487	92
55°	85	408	1054	1224	1258	78
65°	67	216	782	880	892	67
75°	50	133	429	472	474	52
85°	18	41	106	117	119	19
90°	1	4	10	5	5	2
95°	13	51	168	87	59	14
105°	46	70	284	431	402	49
115°	82	100	227	454	518	81
125°	114	128	207	350	412	101
135°	136	150	200	282	320	105
145°	158	168	198	241	260	99
155°	179	184	198	217	224	82
165°	193	195	198	206	208	54
175°	200	200	199	202	202	19
180°	200	200	200	200	200	



TEST NUMBER: P936462

CATALOG NUMBER: SQ4-FB-025U-100D-93050-1D-UNV-STD-W-6-3500K

**CANDELA DISTRIBUTION (FULL):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	551.8	551.8	551.8	551.8	551.8	551.8	551.8	551.8	551.8	551.8	551.8
2.5°	551.8	551.8	555.4	557.2	560.6	562.4	566.0	569.6	580.2	582.0	585.5
5°	537.6	544.7	567.8	576.7	601.5	635.2	649.4	672.5	720.4	734.6	743.5
7.5°	516.3	532.3	589.1	603.3	665.4	754.1	791.4	841.1	917.3	954.6	984.8
10°	482.6	516.3	617.5	651.2	752.3	887.2	956.4	1025.6	1140.9	1192.4	1211.9
12.5°	445.3	500.4	647.7	693.8	839.3	1036.2	1119.6	1195.9	1327.2	1396.4	1407.1
15°	402.8	477.3	676.1	743.5	931.5	1160.4	1252.7	1346.7	1469.1	1518.8	1531.3
17.5°	365.6	459.6	702.6	773.6	1002.5	1272.2	1366.2	1444.3	1543.7	1577.4	1586.2
20°	319.4	431.2	720.4	812.7	1077.1	1353.8	1444.3	1504.7	1572.1	1593.4	1596.9
22.5°	285.7	401.0	731.0	826.8	1126.7	1403.5	1479.8	1527.7	1573.9	1580.9	1582.7
25°	257.3	367.3	729.2	842.8	1169.3	1433.7	1492.2	1527.7	1554.4	1557.8	1557.8
27.5°	230.6	330.0	722.2	846.3	1201.2	1440.7	1486.8	1511.7	1524.2	1531.3	1531.3
30°	207.6	294.6	704.4	839.3	1215.4	1433.7	1470.9	1483.4	1495.8	1506.4	1511.7
32.5°	189.9	260.8	677.8	825.0	1217.2	1415.9	1442.5	1449.6	1467.3	1492.2	1501.1
35°	173.9	227.1	647.7	805.5	1206.5	1387.6	1405.3	1412.4	1447.8	1485.1	1497.5
37.5°	157.9	202.3	608.6	771.8	1190.6	1353.8	1366.2	1378.7	1433.7	1478.0	1492.2
40°	141.9	180.9	562.4	734.6	1165.7	1313.0	1323.6	1343.1	1415.9	1467.3	1481.6
42.5°	129.6	163.2	512.7	695.6	1133.8	1266.9	1282.8	1311.2	1394.6	1449.6	1465.6
45°	118.9	145.5	459.6	642.3	1093.0	1219.0	1242.1	1281.1	1369.7	1423.0	1437.2
47.5°	108.2	133.0	404.6	587.3	1048.6	1171.1	1201.2	1245.6	1336.1	1387.6	1399.9
50°	99.4	120.7	349.5	528.8	1000.7	1119.6	1155.1	1201.2	1293.5	1341.4	1357.4
52.5°	92.3	110.0	298.0	470.2	945.7	1066.4	1107.1	1155.1	1242.1	1288.2	1298.8
55°	85.1	101.2	253.7	408.1	889.0	1009.6	1054.0	1100.1	1185.2	1224.2	1231.4
57.5°	81.7	94.0	216.5	349.5	828.6	945.7	995.4	1038.0	1117.8	1148.0	1155.1
60°	76.3	88.7	188.1	299.8	763.0	885.4	928.0	970.5	1038.0	1062.8	1068.1
62.5°	71.0	85.1	166.8	251.9	695.6	814.4	857.0	896.0	952.8	970.5	977.7
65°	67.4	81.7	150.9	216.5	626.4	739.9	782.5	816.2	862.4	880.1	883.6
67.5°	63.8	78.1	138.4	186.3	557.2	665.4	697.3	729.2	764.8	782.5	784.3
70°	58.6	74.5	127.8	165.0	486.2	580.2	606.8	640.5	668.9	677.8	683.1
72.5°	55.0	69.2	120.7	149.1	413.5	498.6	523.4	542.9	567.8	576.7	576.7
75°	49.7	62.1	113.5	133.0	338.9	408.1	429.4	448.9	468.4	472.0	466.6
77.5°	44.3	55.0	97.6	111.8	264.4	322.9	340.7	351.3	367.3	370.8	372.6
80°	37.2	47.9	76.3	86.9	191.6	237.8	250.2	259.0	273.2	273.2	276.8
82.5°	28.4	37.2	55.0	62.1	129.6	163.2	173.9	179.2	188.1	188.1	188.1
85°	17.7	23.1	35.5	40.8	78.1	99.4	106.5	108.2	115.3	117.1	117.1
87.5°	8.9	12.4	23.1	24.8	40.8	51.5	51.5	55.0	55.0	53.3	51.5
90°	1.3	2.4	3.5	3.8	5.9	8.8	10.2	9.0	6.8	5.1	5.1
92.5°	5.4	14.5	23.6	26.0	36.5	50.6	57.6	50.4	36.2	25.5	24.5
95°	12.9	29.6	46.4	50.6	89.8	142.1	168.2	150.1	113.9	86.8	83.7
97.5°	22.3	37.1	51.8	55.5	121.0	208.2	251.8	240.3	217.5	200.3	194.5
100°	29.6	43.0	56.4	59.7	132.3	229.1	277.5	278.3	280.0	281.2	274.2
102.5°	35.8	48.3	60.8	63.9	137.5	235.6	284.7	299.3	328.5	350.4	344.4
105°	46.3	56.9	67.4	70.1	141.4	236.4	283.9	316.6	382.0	431.1	427.9
107.5°	57.0	66.9	76.7	79.2	142.1	225.9	267.8	313.4	404.7	473.1	473.9
110°	64.3	73.2	82.1	84.3	141.0	216.6	254.4	305.4	407.4	483.8	487.1



TEST NUMBER: P936462

CATALOG NUMBER: SQ4-FB-025U-100D-93050-1D-UNV-STD-W-6-3500K

**CANDELA DISTRIBUTION (continued):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	71.4	80.0	88.4	90.5	141.0	208.4	242.1	294.3	398.7	476.9	482.0
115°	82.2	90.1	97.9	99.8	142.4	199.0	227.4	277.7	378.3	453.7	460.8
117.5°	92.8	99.9	107.0	108.8	145.0	193.2	217.4	262.8	353.5	421.5	429.4
120°	99.0	105.7	112.4	114.1	147.2	191.3	213.4	254.8	337.7	399.9	407.6
122.5°	105.0	111.8	118.5	120.2	150.2	190.3	210.2	247.6	322.2	378.3	385.9
125°	114.3	120.5	126.7	128.2	154.4	189.4	206.9	238.6	302.1	349.6	356.6
127.5°	121.9	128.0	134.3	135.8	158.6	188.9	204.0	231.3	285.8	326.6	332.5
130°	125.9	132.6	139.2	140.9	161.6	189.2	203.0	227.2	275.7	312.0	317.5
132.5°	130.1	136.8	143.4	145.1	164.1	189.4	202.1	223.7	267.2	299.7	304.5
135°	136.3	142.4	148.4	150.0	166.8	189.3	200.5	218.6	255.0	282.2	286.4
137.5°	142.6	148.6	154.6	156.1	170.8	190.4	200.2	215.6	246.3	269.3	272.7
140°	147.8	153.4	158.9	160.4	173.3	190.6	199.2	212.5	239.0	258.9	262.1
142.5°	151.8	156.9	162.1	163.4	175.3	191.2	199.2	210.8	234.2	251.7	254.4
145°	158.0	162.5	167.0	168.1	178.1	191.2	197.9	207.4	226.4	240.7	242.8
147.5°	164.2	168.6	173.0	174.0	182.0	192.6	197.9	205.4	220.3	231.6	233.3
150°	168.2	172.2	176.2	177.2	184.1	193.3	197.9	204.2	216.8	226.3	227.8
152.5°	172.4	175.4	178.4	179.2	185.4	193.7	197.9	203.2	214.1	222.2	223.3
155°	178.6	180.9	183.1	183.6	188.4	194.7	197.9	202.2	210.8	217.2	217.9
157.5°	183.2	185.3	187.5	188.0	191.3	195.7	197.9	201.2	207.9	212.9	213.4
160°	186.3	188.0	189.6	190.1	192.7	196.2	197.9	200.7	206.5	210.8	211.0
162.5°	189.4	190.6	191.9	192.2	194.1	196.6	197.9	200.3	205.1	208.8	209.1
165°	192.8	193.8	195.0	195.3	196.2	197.3	197.9	199.6	203.1	205.7	205.9
167.5°	195.8	196.3	196.9	197.1	197.8	198.8	199.2	200.4	202.6	204.3	204.4
170°	197.9	198.4	198.9	199.0	199.1	199.2	199.2	200.4	202.6	204.3	204.3
172.5°	198.9	199.0	199.2	199.2	199.2	199.2	199.2	200.1	201.9	203.2	203.1
175°	200.5	200.5	200.5	200.5	200.0	199.5	199.2	199.7	200.9	201.8	201.8
177.5°	200.5	200.5	200.5	200.5	200.1	199.7	199.5	199.9	200.8	201.5	201.4
180°	200.5	200.5	200.5	200.5	200.5	200.5	200.5	200.5	200.5	200.5	200.5



TEST NUMBER: P936462

CATALOG NUMBER: SQ4-FB-025U-100D-93050-1D-UNV-STD-W-6-3500K

**CANDELA DISTRIBUTION (continued):**

	80°	90°
0°	551.8	551.8
2.5°	589.1	585.5
5°	757.6	761.2
7.5°	1020.2	1018.5
10°	1268.7	1284.6
12.5°	1449.6	1453.2
15°	1559.6	1566.7
17.5°	1602.3	1604.0
20°	1604.0	1600.5
22.5°	1584.4	1580.9
25°	1561.4	1559.6
27.5°	1540.1	1541.9
30°	1531.3	1536.5
32.5°	1531.3	1540.1
35°	1534.8	1543.7
37.5°	1533.0	1543.7
40°	1525.9	1538.3
42.5°	1506.4	1515.3
45°	1476.3	1486.8
47.5°	1437.2	1444.3
50°	1387.6	1394.6
52.5°	1325.4	1327.2
55°	1250.9	1258.0
57.5°	1171.1	1172.9
60°	1082.3	1087.6
62.5°	988.3	988.3
65°	889.0	892.4
67.5°	786.0	794.9
70°	681.3	683.1
72.5°	578.5	578.5
75°	472.0	473.7
77.5°	370.8	370.8
80°	275.0	276.8
82.5°	189.9	193.4
85°	118.9	118.9
87.5°	55.0	49.7
90°	5.1	5.1
92.5°	20.4	16.4
95°	71.4	59.1
97.5°	171.0	147.5
100°	246.4	218.5
102.5°	320.5	296.6
105°	415.1	402.2
107.5°	476.9	480.1
110°	500.6	514.0





TEST NUMBER: P936462  
CATALOG NUMBER: SQ4-FB-025U-100D-93050-1D-UNV-STD-W-6-3500K

**CANDELA DISTRIBUTION (continued):**

	80°	90°
112.5°	502.6	523.2
115°	489.3	517.8
117.5°	461.1	492.7
120°	438.3	469.1
122.5°	416.1	446.4
125°	384.4	412.4
127.5°	356.1	379.6
130°	339.2	361.0
132.5°	324.0	343.5
135°	303.2	320.0
137.5°	286.5	300.2
140°	275.0	287.8
142.5°	265.5	276.6
145°	251.2	259.6
147.5°	240.3	247.2
150°	233.4	239.0
152.5°	227.5	231.8
155°	220.7	223.6
157.5°	215.4	217.4
160°	212.2	213.4
162.5°	210.1	211.2
165°	207.1	208.2
167.5°	204.9	205.4
170°	204.3	204.3
172.5°	202.7	202.3
175°	201.8	201.8
177.5°	200.9	200.5
180°	200.5	200.5



TEST NUMBER: P936462  
 CATALOG NUMBER: SQ4-FB-025U-100D-93050-1D-UNV-STD-W-6-3500K

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.40	8.63	8.08	9.34	10.17	20.56	21.80	21.24	22.50	23.33
	3H	8.13	9.24	8.82	9.96	10.82	22.42	23.54	23.12	24.25	25.11
	4H	8.44	9.50	9.16	10.22	11.10	23.08	24.14	23.79	24.86	25.73
	6H	8.71	9.69	9.44	10.42	11.31	23.53	24.50	24.25	25.24	26.13
	8H	8.79	9.72	9.53	10.48	11.37	23.66	24.59	24.39	25.34	26.23
	12H	8.82	9.71	9.57	10.46	11.38	23.73	24.62	24.48	25.37	26.29
4H	2H	14.65	15.70	15.36	16.43	17.30	20.88	21.93	21.60	22.66	23.53
	3H	16.25	17.13	16.98	17.90	18.79	22.95	23.84	23.68	24.60	25.49
	4H	16.36	17.17	17.11	17.93	18.85	23.73	24.54	24.48	25.30	26.22
	6H	16.39	17.10	17.16	17.88	18.81	24.29	24.99	25.05	25.78	26.71
	8H	16.38	17.04	17.15	17.82	18.76	24.46	25.12	25.23	25.90	26.84
	12H	16.36	16.95	17.14	17.76	18.70	24.57	25.16	25.36	25.97	26.92
8H	4H	17.83	18.49	18.60	19.27	20.22	23.83	24.48	24.59	25.27	26.21
	6H	18.09	18.64	18.89	19.47	20.41	24.47	25.02	25.27	25.84	26.78
	8H	18.12	18.60	18.93	19.43	20.39	24.69	25.18	25.50	26.00	26.96
	12H	18.10	18.53	18.92	19.35	20.36	24.85	25.28	25.66	26.10	27.11
12H	4H	17.99	18.59	18.78	19.39	20.34	23.80	24.39	24.59	25.20	26.14
	6H	18.36	18.84	19.16	19.67	20.63	24.46	24.94	25.27	25.77	26.73
	8H	18.44	18.87	19.26	19.69	20.70	24.70	25.13	25.52	25.95	26.96