

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P936760

Luminaire Tested: SQ4-FB-050U-075D-93050-1D-UNV-STD-W-4-5000K

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P936760
REPORT IS A COMBINATION OF REPORTS P933470 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-050U-075D-93050-1D-UNV-STD-W-4-5000K
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4035.9 lumens
Efficiency: N/A
Efficacy: 110.9 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 4' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 36.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P936760
CATALOG NUMBER: SQ4-FB-050U-075D-93050-1D-UNV-STD-W-4-5000K

Luminous Intensity Polar Plot

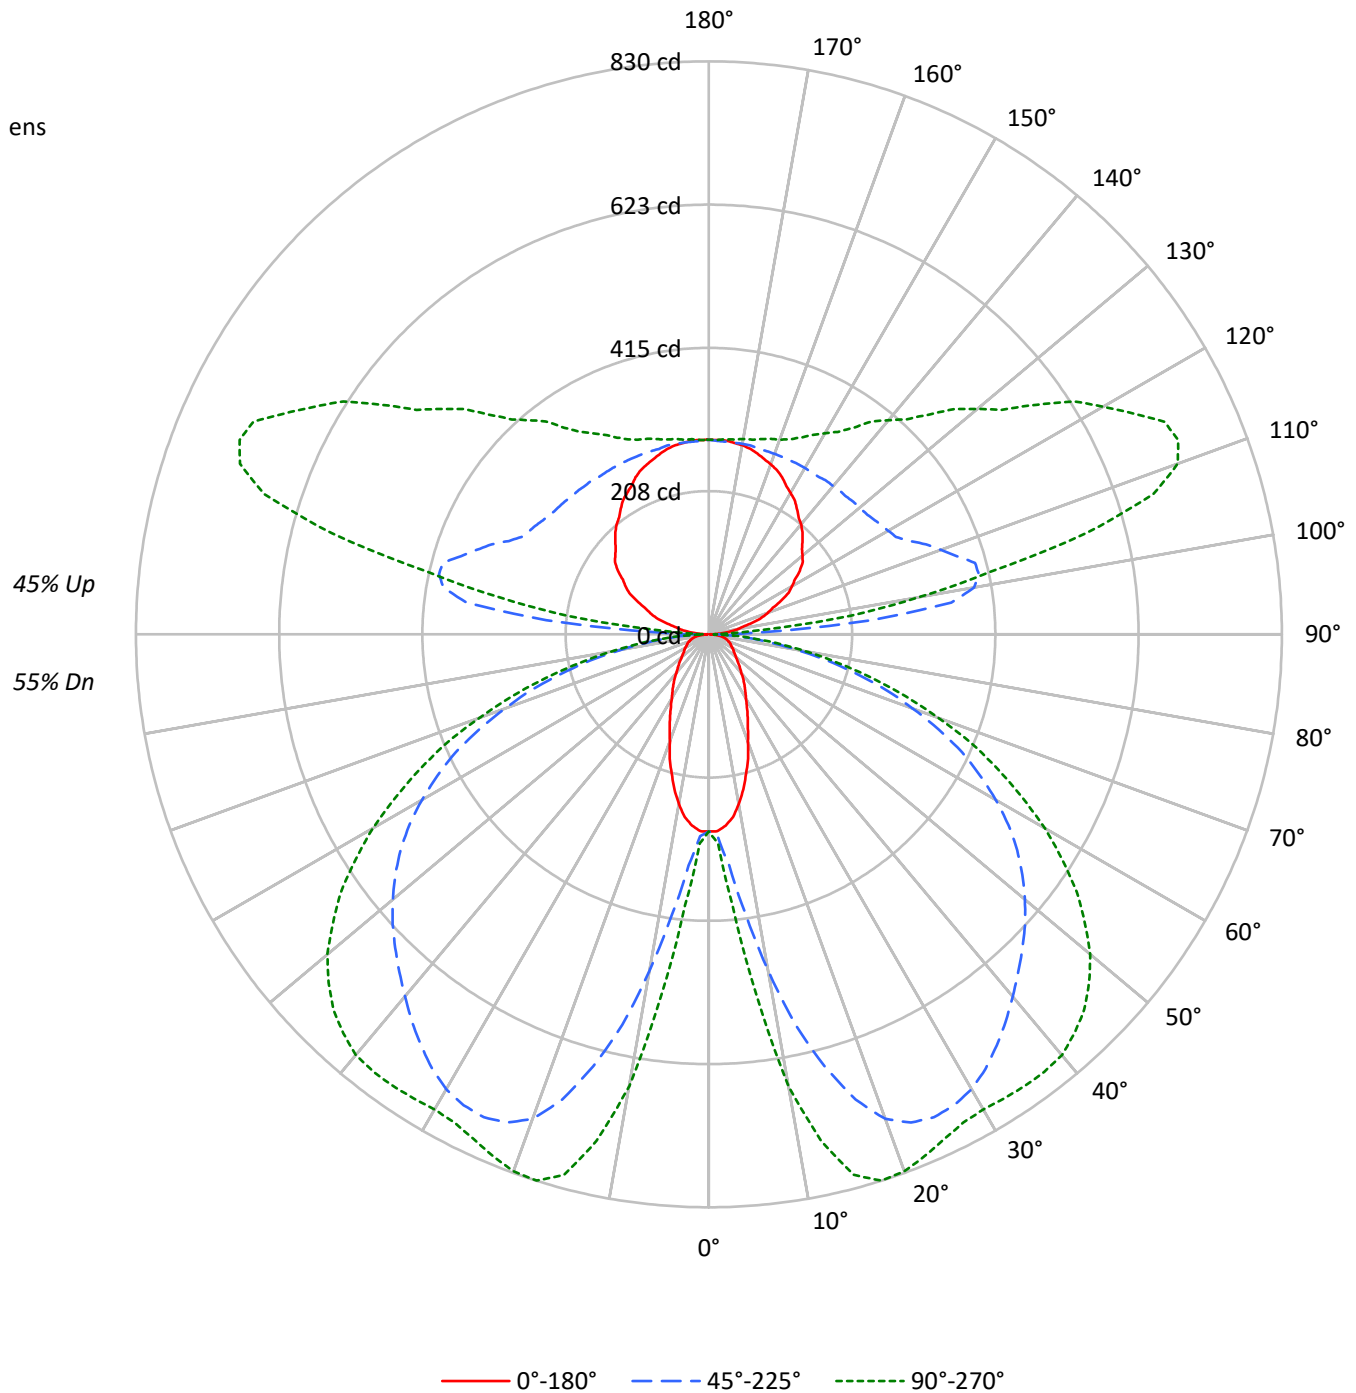



TEST NUMBER: P936760

CATALOG NUMBER: SQ4-FB-050U-075D-93050-1D-UNV-STD-W-4-5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	108	108	108	108	100	100	100	100	86	86	86	73	73	73	60	60	60	60	60	60	55
1	98	94	89	86	91	87	83	80	75	72	69	63	61	59	53	51	50	50	50	50	45
2	89	81	74	69	82	75	70	65	65	60	56	55	51	49	45	43	41	41	41	41	37
3	81	71	63	57	74	66	59	53	56	51	47	48	44	40	40	37	34	34	34	34	30
4	73	62	54	47	68	58	50	45	50	44	39	42	38	34	35	32	29	29	29	29	25
5	67	55	46	40	62	51	44	38	44	38	33	37	33	29	31	28	25	25	25	25	21
6	62	49	40	34	57	46	38	32	39	33	29	33	29	25	28	24	21	21	21	21	18
7	57	44	36	30	52	41	34	28	35	29	25	30	25	22	25	22	19	19	19	19	16
8	53	40	32	26	49	37	30	25	32	26	22	27	23	19	23	19	16	16	16	16	14
9	49	36	28	23	45	34	27	22	29	23	19	25	20	17	21	17	15	15	15	15	12
10	46	33	25	20	42	31	24	19	27	21	17	23	18	15	19	16	13	13	13	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2648	2648	2648
5°	2585	3059	3560
10°	2342	4455	5901
15°	1988	5817	7126
20°	1617	6735	7263
25°	1347	7043	7115
30°	1134	7082	7101
35°	1001	6959	7285
40°	871	6800	7475
45°	787	6683	7504
50°	721	6575	7380
55°	687	6421	7052
60°	703	6131	6536
65°	727	5693	5827
70°	769	4956	4922
75°	843	4030	3841
80°	903	2785	2589
85°	762	1471	1325

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 7504 cd/sqm



TEST NUMBER: P936760

CATALOG NUMBER: SQ4-FB-050U-075D-93050-1D-UNV-STD-W-4-5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	36.9	0.9
10°-20°	163.6	4.1
20°-30°	286.2	7.1
30°-40°	368.4	9.1
40°-50°	411.5	10.2
50°-60°	394.1	9.8
60°-70°	312.4	7.7
70°-80°	183.7	4.6
80°-90°	52.1	1.3
90°-100°	137.4	3.4
100°-110°	361.2	8.9
110°-120°	374.5	9.3
120°-130°	300.4	7.4
130°-140°	235.7	5.8
140°-150°	180.9	4.5
150°-160°	130.3	3.2
160°-170°	79.7	2.0
170°-180°	26.9	0.7
0°-30°	486.7	12.1
0°-40°	855.2	21.2
0°-60°	1660.8	41.2
0°-90°	2209.0	54.7
90°-120°	873.0	21.6
90°-150°	1590.0	39.4
90°-180°	1827.0	45.3
0°-180°	4035.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	285	285	285	285	285	
5°	278	298	336	380	394	26
15°	208	384	648	786	810	58
25°	133	436	772	806	807	61
35°	90	417	727	768	798	56
45°	62	332	642	736	769	48
55°	44	211	545	633	651	40
65°	35	112	405	455	462	35
75°	26	69	222	244	245	27
85°	9	21	55	61	62	10
90°	2	5	14	7	7	2
95°	18	71	237	122	83	20
105°	65	99	399	606	566	69
115°	116	140	320	638	728	114
125°	161	180	291	492	580	143
135°	192	211	282	397	450	148
145°	222	236	278	338	365	139
155°	251	258	278	306	314	115
165°	271	275	278	289	293	76
175°	282	282	280	284	284	27
180°	282	282	282	282	282	



TEST NUMBER: P936760

CATALOG NUMBER: SQ4-FB-050U-075D-93050-1D-UNV-STD-W-4-5000K

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	285.4	285.4	285.4	285.4	285.4	285.4	285.4	285.4	285.4	285.4	285.4
2.5°	285.4	285.4	287.2	288.2	290.0	290.9	292.7	294.6	300.1	301.0	302.8
5°	278.1	281.7	293.7	298.3	311.1	328.5	335.9	347.8	372.6	379.9	384.5
7.5°	267.0	275.3	304.7	312.0	344.1	390.0	409.3	435.0	474.4	493.7	509.3
10°	249.6	267.0	319.4	336.8	389.1	458.8	494.6	530.4	590.1	616.7	626.8
12.5°	230.3	258.8	335.0	358.8	434.1	535.9	579.1	618.5	686.4	722.2	727.7
15°	208.3	246.9	349.6	384.5	481.8	600.2	647.9	696.5	759.9	785.5	792.0
17.5°	189.0	237.7	363.4	400.1	518.5	658.0	706.6	747.0	798.4	815.8	820.4
20°	165.2	223.0	372.6	420.3	557.0	700.2	747.0	778.2	813.1	824.1	825.9
22.5°	147.7	207.4	378.1	427.6	582.7	725.9	765.4	790.1	814.0	817.7	818.6
25°	133.1	190.0	377.2	435.9	604.8	741.5	771.8	790.1	803.9	805.7	805.7
27.5°	119.3	170.7	373.5	437.7	621.3	745.2	769.0	781.9	788.3	792.0	792.0
30°	107.4	152.3	364.3	434.1	628.6	741.5	760.8	767.2	773.6	779.1	781.9
32.5°	98.2	134.9	350.6	426.7	629.5	732.3	746.1	749.8	758.9	771.8	776.4
35°	89.9	117.5	335.0	416.6	624.0	717.6	726.8	730.5	748.8	768.1	774.5
37.5°	81.7	104.6	314.8	399.2	615.8	700.2	706.6	713.0	741.5	764.4	771.8
40°	73.4	93.6	290.9	379.9	602.9	679.1	684.6	694.7	732.3	758.9	766.3
42.5°	67.0	84.4	265.2	359.7	586.4	655.2	663.5	678.2	721.3	749.8	758.0
45°	61.5	75.3	237.7	332.2	565.3	630.5	642.4	662.6	708.5	736.0	743.3
47.5°	56.0	68.8	209.2	303.8	542.4	605.7	621.3	644.2	691.0	717.6	724.1
50°	51.4	62.4	180.8	273.5	517.6	579.1	597.4	621.3	669.0	693.8	702.0
52.5°	47.7	56.9	154.2	243.2	489.1	551.5	572.6	597.4	642.4	666.2	671.8
55°	44.0	52.3	131.2	211.1	459.8	522.2	545.1	569.0	613.0	633.2	636.9
57.5°	42.2	48.6	112.0	180.8	428.6	489.1	514.8	536.9	578.1	593.7	597.4
60°	39.5	45.9	97.3	155.1	394.6	457.9	480.0	502.0	536.9	549.7	552.5
62.5°	36.7	44.0	86.3	130.3	359.7	421.2	443.2	463.4	492.8	502.0	505.6
65°	34.9	42.2	78.0	112.0	323.9	382.7	404.7	422.1	446.0	455.2	457.0
67.5°	33.0	40.4	71.6	96.4	288.2	344.1	360.7	377.2	395.5	404.7	405.6
70°	30.3	38.5	66.1	85.3	251.4	300.1	313.9	331.3	346.0	350.6	353.3
72.5°	28.4	35.8	62.4	77.1	213.8	257.9	270.7	280.8	293.7	298.3	298.3
75°	25.7	32.1	58.7	68.8	175.3	211.1	222.1	232.2	242.3	244.1	241.4
77.5°	22.9	28.4	50.5	57.8	136.7	167.0	176.2	181.7	190.0	191.8	192.7
80°	19.3	24.8	39.5	45.0	99.1	123.0	129.4	134.0	141.3	141.3	143.2
82.5°	14.7	19.3	28.4	32.1	67.0	84.4	89.9	92.7	97.3	97.3	97.3
85°	9.2	11.9	18.4	21.1	40.4	51.4	55.1	56.0	59.7	60.6	60.6
87.5°	4.6	6.4	11.9	12.8	21.1	26.6	26.6	28.4	28.4	27.5	26.6
90°	1.9	3.4	5.0	5.3	8.4	12.4	14.4	12.8	9.5	7.2	7.2
92.5°	7.5	20.4	33.3	36.5	51.3	71.0	80.9	70.9	50.9	36.0	34.5
95°	18.2	41.7	65.2	71.1	126.3	199.8	236.6	211.1	160.1	122.0	117.6
97.5°	31.4	52.1	72.9	78.1	170.0	292.7	354.0	338.0	305.8	281.6	273.4
100°	41.6	60.4	79.3	84.0	186.0	322.1	390.2	391.4	393.8	395.5	385.7
102.5°	50.3	67.9	85.4	89.8	193.4	331.4	400.4	420.9	462.0	492.7	484.3
105°	65.1	79.9	94.8	98.6	198.8	332.5	399.3	445.3	537.2	606.2	601.7
107.5°	80.2	94.1	107.9	111.4	199.8	317.7	376.6	440.8	569.1	665.2	666.3
110°	90.4	102.9	115.4	118.6	198.3	304.6	357.7	429.4	572.8	680.4	685.1



TEST NUMBER: P936760

CATALOG NUMBER: SQ4-FB-050U-075D-93050-1D-UNV-STD-W-4-5000K

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	100.4	112.3	124.3	127.3	198.3	293.1	340.5	413.9	560.6	670.7	678.0
115°	115.5	126.6	137.6	140.3	200.1	279.9	319.8	390.5	531.9	638.0	648.0
117.5°	130.5	140.5	150.5	153.0	203.9	271.7	305.7	369.5	497.0	592.7	603.8
120°	139.2	148.7	158.0	160.4	206.9	269.0	300.0	358.3	474.9	562.4	573.2
122.5°	147.7	157.3	166.7	169.1	211.3	267.5	295.6	348.1	453.2	531.9	542.5
125°	160.8	169.4	178.0	180.2	217.1	266.3	290.9	335.5	424.7	491.6	501.4
127.5°	171.3	180.1	188.9	191.1	223.0	265.7	287.0	325.2	401.8	459.2	467.5
130°	177.0	186.5	195.8	198.2	227.3	266.0	285.4	319.5	387.7	438.8	446.5
132.5°	182.9	192.3	201.7	204.1	230.8	266.3	284.1	314.6	375.6	421.4	428.3
135°	191.6	200.1	208.8	210.9	234.6	266.0	281.8	307.3	358.5	396.8	402.7
137.5°	200.5	209.0	217.5	219.6	240.3	267.7	281.5	303.0	346.2	378.6	383.5
140°	207.9	215.7	223.6	225.5	243.6	268.0	280.1	298.8	336.2	364.1	368.6
142.5°	213.5	220.8	228.0	229.8	246.6	268.9	280.1	296.5	329.3	353.9	357.7
145°	222.3	228.5	234.8	236.4	250.3	269.0	278.2	291.6	318.4	338.5	341.5
147.5°	231.0	237.1	243.2	244.7	255.9	270.8	278.2	288.8	309.9	325.7	328.2
150°	236.6	242.1	247.7	249.1	258.8	271.7	278.2	287.1	305.0	318.3	320.4
152.5°	242.5	246.7	250.9	251.9	260.7	272.4	278.2	285.9	301.1	312.5	313.9
155°	251.2	254.3	257.4	258.1	264.8	273.7	278.2	284.3	296.4	305.5	306.5
157.5°	257.6	260.6	263.7	264.4	269.0	275.1	278.2	282.9	292.4	299.4	300.2
160°	262.0	264.3	266.7	267.2	270.9	275.8	278.2	282.3	290.4	296.4	296.8
162.5°	266.3	268.1	269.8	270.3	272.9	276.5	278.2	281.6	288.4	293.6	293.9
165°	271.1	272.6	274.3	274.7	275.9	277.4	278.2	280.6	285.5	289.2	289.5
167.5°	275.4	276.1	276.9	277.1	278.1	279.4	280.1	281.7	284.9	287.3	287.5
170°	278.2	279.0	279.7	279.9	280.0	280.1	280.1	281.7	284.9	287.3	287.3
172.5°	279.7	279.9	280.1	280.1	280.1	280.1	280.1	281.4	283.8	285.8	285.6
175°	281.8	281.8	281.8	281.8	281.3	280.4	280.1	280.9	282.6	283.8	283.8
177.5°	281.8	281.8	281.8	281.8	281.4	280.8	280.5	281.2	282.5	283.4	283.2
180°	281.8	281.8	281.8	281.8	281.8	281.8	281.8	281.8	281.8	281.8	281.8



TEST NUMBER: P936760

CATALOG NUMBER: SQ4-FB-050U-075D-93050-1D-UNV-STD-W-4-5000K

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	285.4	285.4
2.5°	304.7	302.8
5°	391.9	393.7
7.5°	527.7	526.8
10°	656.2	664.4
12.5°	749.8	751.6
15°	806.7	810.3
17.5°	828.7	829.6
20°	829.6	827.8
22.5°	819.5	817.7
25°	807.6	806.7
27.5°	796.6	797.5
30°	792.0	794.7
32.5°	792.0	796.6
35°	793.8	798.4
37.5°	792.9	798.4
40°	789.2	795.6
42.5°	779.1	783.7
45°	763.5	769.0
47.5°	743.3	747.0
50°	717.6	721.3
52.5°	685.5	686.4
55°	647.0	650.6
57.5°	605.7	606.6
60°	559.8	562.5
62.5°	511.2	511.2
65°	459.8	461.6
67.5°	406.5	411.1
70°	352.4	353.3
72.5°	299.2	299.2
75°	244.1	245.0
77.5°	191.8	191.8
80°	142.2	143.2
82.5°	98.2	100.0
85°	61.5	61.5
87.5°	28.4	25.7
90°	7.2	7.2
92.5°	28.8	23.0
95°	100.3	83.1
97.5°	240.4	207.5
100°	346.4	307.2
102.5°	450.7	417.1
105°	583.7	565.6
107.5°	670.7	675.1
110°	703.9	722.7



TEST NUMBER: P936760

CATALOG NUMBER: SQ4-FB-050U-075D-93050-1D-UNV-STD-W-4-5000K

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	706.9	735.8
115°	688.1	728.2
117.5°	648.4	692.9
120°	616.3	659.5
122.5°	585.2	627.8
125°	540.6	579.9
127.5°	500.6	533.7
130°	477.1	507.7
132.5°	455.6	483.1
135°	426.4	449.9
137.5°	402.8	422.1
140°	386.7	404.8
142.5°	373.3	388.9
145°	353.3	365.1
147.5°	337.9	347.6
150°	328.3	336.2
152.5°	319.9	325.9
155°	310.5	314.4
157.5°	302.9	305.7
160°	298.4	300.0
162.5°	295.5	297.0
165°	291.2	292.8
167.5°	288.2	288.8
170°	287.3	287.3
172.5°	285.0	284.5
175°	283.8	283.8
177.5°	282.6	281.8
180°	281.8	281.8



TEST NUMBER: P936760
 CATALOG NUMBER: SQ4-FB-050U-075D-93050-1D-UNV-STD-W-4-5000K

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	4.80	5.75	5.70	6.68	7.88	17.93	18.88	18.84	19.81	21.01
	3H	5.51	6.36	6.43	7.30	8.53	19.76	20.62	20.68	21.56	22.78
	4H	5.81	6.62	6.75	7.57	8.80	20.40	21.21	21.34	22.16	23.39
	6H	6.07	6.81	7.01	7.77	9.01	20.83	21.57	21.77	22.52	23.77
	8H	6.14	6.85	7.09	7.82	9.06	20.94	21.65	21.90	22.62	23.87
	12H	6.16	6.84	7.12	7.80	9.07	21.01	21.69	21.97	22.65	23.92
4H	2H	12.00	12.81	12.94	13.75	14.98	18.22	19.03	19.16	19.98	21.21
	3H	13.57	14.25	14.52	15.23	16.47	20.26	20.94	21.21	21.91	23.16
	4H	13.67	14.29	14.63	15.26	16.53	21.02	21.64	21.98	22.61	23.88
	6H	13.69	14.23	14.66	15.22	16.49	21.55	22.09	22.52	23.08	24.35
	8H	13.67	14.17	14.64	15.16	16.44	21.71	22.21	22.68	23.20	24.48
	12H	13.63	14.08	14.63	15.09	16.38	21.80	22.25	22.79	23.26	24.55
8H	4H	15.12	15.62	16.09	16.60	17.89	21.09	21.59	22.06	22.58	23.86
	6H	15.36	15.78	16.36	16.81	18.09	21.71	22.13	22.71	23.15	24.44
	8H	15.38	15.75	16.39	16.77	18.07	21.92	22.29	22.93	23.31	24.61
	12H	15.35	15.68	16.37	16.69	18.04	22.06	22.39	23.08	23.40	24.74
12H	4H	15.26	15.71	16.25	16.72	18.01	21.05	21.50	22.04	22.50	23.79
	6H	15.62	15.99	16.63	17.00	18.30	21.69	22.06	22.70	23.08	24.38
	8H	15.69	16.02	16.71	17.03	18.37	21.92	22.24	22.93	23.26	24.60