

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P936956

Luminaire Tested: SQ4-FB-050U-125D-93050-1D-UNV-STD-W-12-5000K

Issue Date: 12/17/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P936956  
REPORT IS A COMBINATION OF REPORTS P933464 AND P933786  
Test Lab: INNOVATION CENTER  
Issue Date: 12/17/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ4-FB-050U-125D-93050-1D-UNV-STD-W-12-5000K  
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 16692.8 lumens  
Efficiency: N/A  
Efficacy: 99.4 lumens/watt  
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33  
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 12' x H: 0.1')  
CIE Type: Semi-Direct  
  
Input Watts (W): 168  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P936956  
CATALOG NUMBER: SQ4-FB-050U-125D-93050-1D-UNV-STD-W-12-5000K

### Luminous Intensity Polar Plot

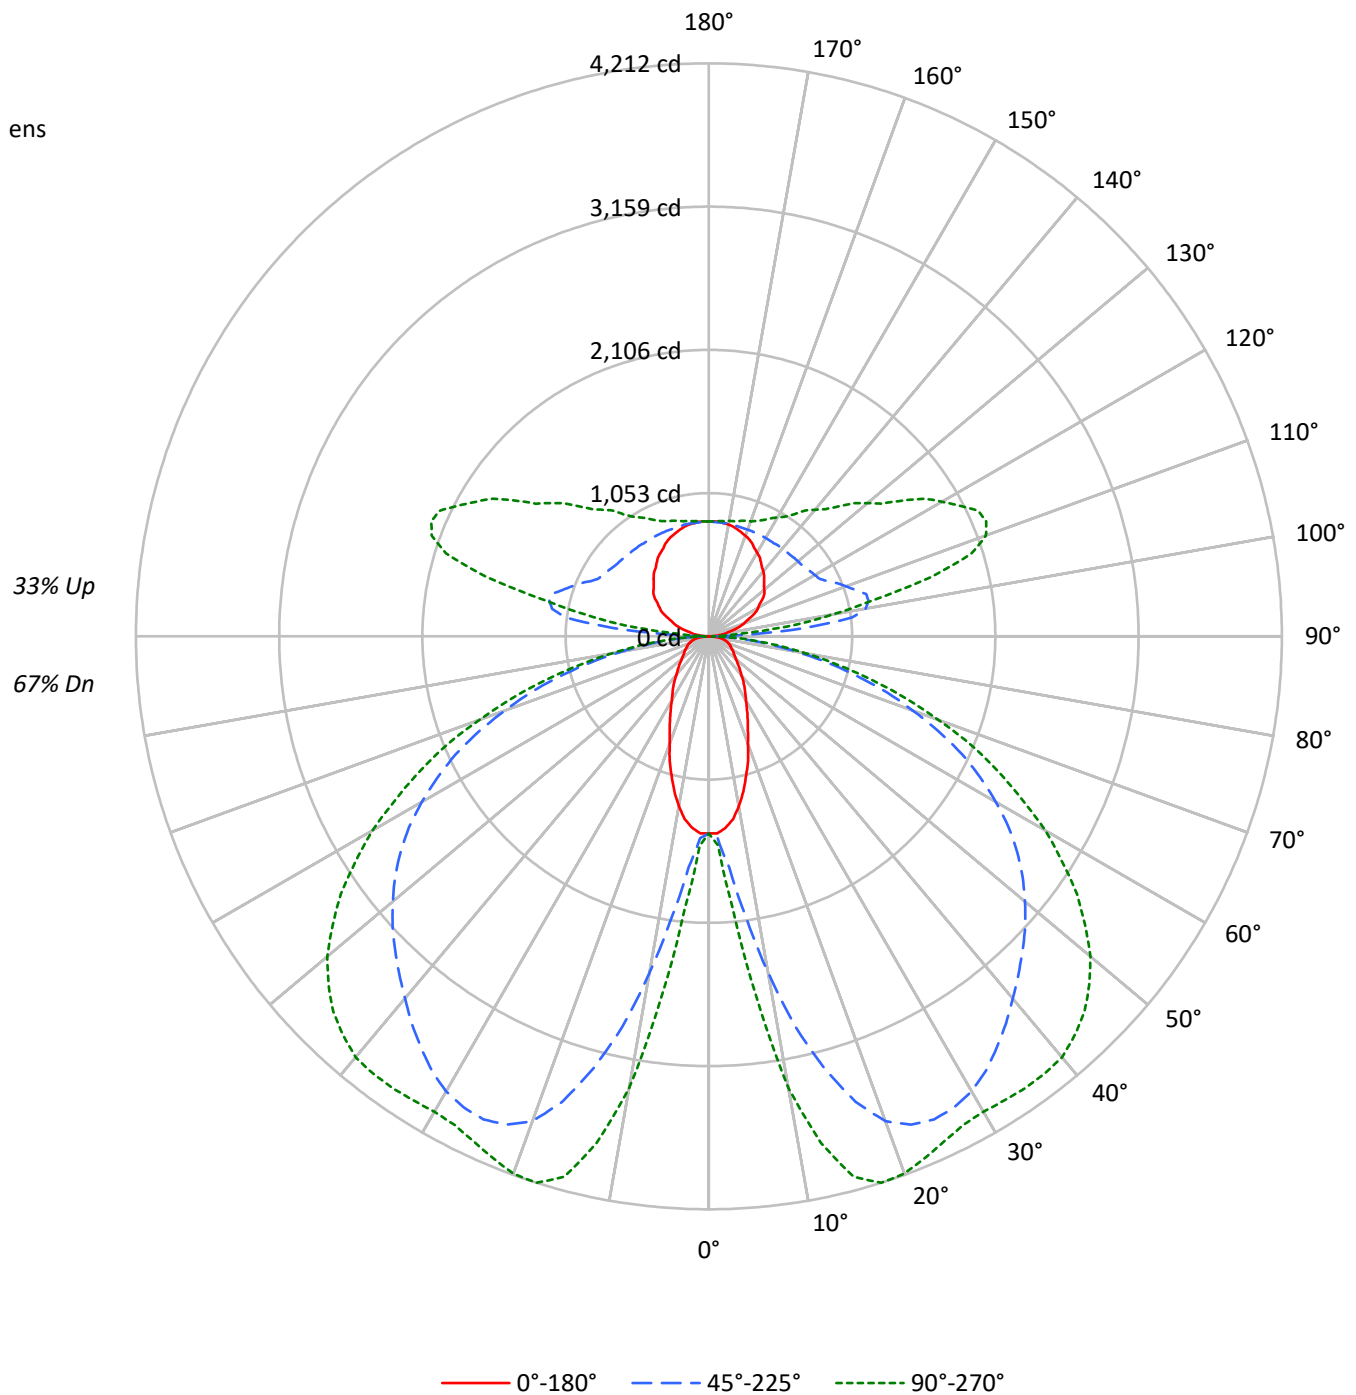



TEST NUMBER: P936956

CATALOG NUMBER: SQ4-FB-050U-125D-93050-1D-UNV-STD-W-12-5000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	111	111	111	111	105	105	105	105	93	93	93	82	82	82	72	72	72	67
1	101	96	92	88	95	91	87	83	80	78	75	71	69	67	62	61	59	55
2	91	83	76	71	86	78	72	67	70	65	61	61	58	55	54	51	49	45
3	83	72	64	58	77	68	61	55	61	55	50	54	49	45	47	44	41	37
4	75	64	55	48	70	60	52	46	53	47	42	47	42	38	42	38	34	31
5	69	56	47	41	64	53	45	39	47	41	36	42	37	32	37	33	29	26
6	63	50	41	35	59	47	39	34	42	36	31	38	32	28	33	29	25	23
7	58	45	36	30	55	43	35	29	38	32	27	34	29	24	30	26	22	20
8	54	41	32	27	51	39	31	26	35	28	24	31	26	22	27	23	20	17
9	50	37	29	24	47	35	28	23	32	25	21	28	23	19	25	21	17	15
10	47	34	26	21	44	32	25	20	29	23	19	26	21	17	23	19	16	14

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	4482	4482	4482
5°	4380	5181	6024
10°	3974	7554	9987
15°	3379	9872	12059
20°	2752	11443	12290
25°	2296	11977	12040
30°	1938	12056	12017
35°	1714	11859	12328
40°	1494	11602	12649
45°	1354	11415	12699
50°	1243	11247	12489
55°	1192	11000	11935
60°	1221	10522	11061
65°	1273	9792	9860
70°	1359	8546	8329
75°	1511	6974	6500
80°	1663	4843	4380
85°	1510	2574	2242

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 45°  
 Luminance: 12699 cd/sqm



TEST NUMBER: P936956

CATALOG NUMBER: SQ4-FB-050U-125D-93050-1D-UNV-STD-W-12-5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	187.4	1.1
10°-20°	830.7	5.0
20°-30°	1453.0	8.7
30°-40°	1870.4	11.2
40°-50°	2089.2	12.5
50°-60°	2000.9	12.0
60°-70°	1585.7	9.5
70°-80°	932.5	5.6
80°-90°	262.3	1.6
90°-100°	412.1	2.5
100°-110°	1083.5	6.5
110°-120°	1123.5	6.7
120°-130°	901.2	5.4
130°-140°	707.1	4.2
140°-150°	542.7	3.3
150°-160°	390.9	2.3
160°-170°	239.1	1.4
170°-180°	80.8	0.5
0°-30°	2471.0	14.8
0°-40°	4341.4	26.0
0°-60°	8431.5	50.5
0°-90°	11212.0	67.2
90°-120°	2619.1	15.7
90°-150°	4770.1	28.6
90°-180°	5481.0	32.8
0°-180°	16692.8	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1449	1449	1449	1449	1449	
5°	1412	1514	1705	1929	1999	130
15°	1058	1952	3289	3988	4114	294
25°	676	2213	3918	4090	4095	311
35°	457	2115	3690	3900	4053	285
45°	312	1686	3261	3736	3904	241
55°	224	1072	2767	3215	3303	204
65°	177	568	2054	2311	2343	175
75°	130	350	1128	1239	1244	137
85°	47	107	280	308	312	49
90°	6	16	43	22	22	8
95°	54	213	710	366	249	60
105°	195	296	1198	1819	1697	207
115°	347	421	960	1914	2185	342
125°	482	541	873	1475	1740	428
135°	575	633	846	1190	1350	445
145°	667	709	835	1016	1095	418
155°	754	774	835	916	943	346
165°	813	824	835	868	878	229
175°	846	846	840	851	851	80
180°	846	846	846	846	846	



TEST NUMBER: P936956

CATALOG NUMBER: SQ4-FB-050U-125D-93050-1D-UNV-STD-W-12-5000K

**CANDELA DISTRIBUTION (FULL):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	1448.9	1448.9	1448.9	1448.9	1448.9	1448.9	1448.9	1448.9	1448.9	1448.9	1448.9
2.5°	1448.9	1448.9	1458.2	1462.9	1472.2	1476.8	1486.2	1495.5	1523.5	1528.1	1537.4
5°	1411.6	1430.2	1490.8	1514.1	1579.4	1667.9	1705.2	1765.7	1891.5	1928.8	1952.0
7.5°	1355.7	1397.6	1546.8	1584.0	1747.1	1980.0	2077.8	2208.3	2408.7	2506.5	2585.7
10°	1267.2	1355.7	1621.3	1709.8	1975.3	2329.4	2511.1	2692.8	2995.6	3130.7	3182.0
12.5°	1169.4	1313.8	1700.5	1821.6	2203.7	2720.8	2939.7	3140.1	3484.9	3666.6	3694.5
15°	1057.6	1253.2	1775.0	1952.0	2445.9	3046.9	3289.1	3536.1	3857.5	3988.0	4020.6
17.5°	959.7	1206.7	1844.9	2031.2	2632.2	3340.4	3587.4	3792.3	4053.2	4141.7	4165.1
20°	838.6	1132.1	1891.5	2133.7	2828.0	3554.7	3792.3	3950.7	4127.8	4183.7	4192.9
22.5°	750.0	1052.9	1919.5	2171.0	2958.4	3685.2	3885.5	4011.2	4132.4	4151.0	4155.7
25°	675.5	964.4	1914.8	2212.9	3070.1	3764.4	3918.1	4011.2	4081.2	4090.4	4090.4
27.5°	605.7	866.6	1896.1	2222.3	3154.0	3783.0	3904.1	3969.3	4002.0	4020.6	4020.6
30°	545.1	773.3	1849.5	2203.7	3191.3	3764.4	3862.2	3894.8	3927.5	3955.4	3969.3
32.5°	498.5	684.9	1779.7	2166.4	3196.0	3717.8	3787.7	3806.3	3852.9	3918.1	3941.4
35°	456.6	596.3	1700.5	2115.1	3168.1	3643.2	3689.8	3708.5	3801.6	3899.5	3932.0
37.5°	414.6	531.1	1598.0	2026.6	3126.1	3554.7	3587.4	3619.9	3764.4	3880.8	3918.1
40°	372.7	475.2	1476.8	1928.8	3060.9	3447.6	3475.5	3526.8	3717.8	3852.9	3890.1
42.5°	340.1	428.7	1346.4	1826.3	2977.0	3326.5	3368.4	3442.9	3661.9	3806.3	3848.3
45°	312.1	382.0	1206.7	1686.5	2869.8	3200.6	3261.2	3363.7	3596.6	3736.4	3773.7
47.5°	284.2	349.5	1062.2	1542.1	2753.4	3074.8	3154.0	3270.5	3508.2	3643.2	3675.8
50°	260.9	316.8	917.8	1388.4	2627.6	2939.7	3032.9	3154.0	3396.3	3522.1	3564.1
52.5°	242.3	288.9	782.7	1234.6	2483.2	2800.0	2907.2	3032.9	3261.2	3382.3	3410.2
55°	223.6	265.6	666.2	1071.5	2334.1	2650.9	2767.4	2888.5	3112.1	3214.6	3233.2
57.5°	214.3	247.0	568.4	917.8	2175.7	2483.2	2613.6	2725.5	2935.1	3014.3	3032.9
60°	200.3	232.9	493.8	787.4	2003.3	2324.8	2436.6	2548.4	2725.5	2790.6	2804.7
62.5°	186.4	223.6	437.9	661.6	1826.3	2138.4	2250.2	2352.7	2501.8	2548.4	2567.1
65°	177.0	214.3	396.0	568.4	1644.6	1942.8	2054.5	2143.1	2264.2	2310.8	2320.1
67.5°	167.8	205.0	363.4	489.2	1462.9	1747.1	1830.9	1914.8	2008.0	2054.5	2059.2
70°	153.7	195.7	335.4	433.2	1276.5	1523.5	1593.3	1681.9	1756.4	1779.7	1793.6
72.5°	144.4	181.7	316.8	391.3	1085.5	1309.2	1374.3	1425.6	1490.8	1514.1	1514.1
75°	130.4	163.1	298.2	349.5	889.8	1071.5	1127.5	1178.7	1229.9	1239.3	1225.3
77.5°	116.5	144.4	256.2	293.5	694.1	848.0	894.5	922.5	964.4	973.7	978.4
80°	97.8	125.8	200.3	228.3	503.2	624.3	656.9	680.2	717.5	717.5	726.8
82.5°	74.5	97.8	144.4	163.1	340.1	428.7	456.6	470.5	493.8	493.8	493.8
85°	46.6	60.6	93.1	107.2	205.0	260.9	279.5	284.2	302.8	307.5	307.5
87.5°	23.3	32.6	60.6	65.2	107.2	135.1	135.1	144.4	144.4	139.8	135.1
90°	5.7	10.2	14.8	15.9	25.0	37.1	43.1	38.4	28.7	21.6	21.6
92.5°	22.7	61.2	99.8	109.5	153.9	213.2	242.8	212.8	152.8	107.8	103.5
95°	54.5	125.1	195.7	213.4	378.8	599.5	709.8	633.4	480.6	366.0	352.9
97.5°	94.2	156.5	218.8	234.4	510.3	878.2	1062.2	1014.0	917.3	844.9	820.2
100°	124.8	181.3	237.8	251.9	558.1	966.4	1170.6	1174.1	1181.2	1186.5	1157.0
102.5°	151.0	203.6	256.3	269.5	580.1	994.2	1201.3	1262.7	1385.8	1478.1	1452.9
105°	195.2	239.8	284.4	295.6	596.3	997.4	1197.9	1335.8	1611.7	1818.6	1805.0
107.5°	240.6	282.2	323.9	334.2	599.4	953.0	1129.8	1322.2	1707.1	1995.7	1999.0
110°	271.3	308.8	346.4	355.8	594.8	913.7	1073.1	1288.2	1718.4	2041.0	2055.2



TEST NUMBER: P936956

CATALOG NUMBER: SQ4-FB-050U-125D-93050-1D-UNV-STD-W-12-5000K

**CANDELA DISTRIBUTION (continued):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	301.3	337.1	372.9	381.9	595.0	879.2	1021.4	1241.5	1681.9	2012.1	2033.8
115°	346.7	379.7	412.8	421.0	600.5	839.9	959.5	1171.6	1595.8	1913.9	1944.0
117.5°	391.5	421.5	451.5	459.0	611.6	815.2	917.0	1108.4	1491.2	1778.3	1811.6
120°	417.6	445.9	474.1	481.1	620.7	806.9	900.0	1074.9	1424.6	1687.0	1719.4
122.5°	443.2	471.7	500.1	507.3	633.9	802.5	886.9	1044.3	1359.4	1595.6	1627.5
125°	482.3	508.3	534.3	540.8	651.5	798.9	872.7	1006.5	1274.0	1474.7	1504.2
127.5°	514.1	540.3	566.6	573.1	669.0	796.8	860.8	975.7	1205.4	1377.7	1402.6
130°	531.2	559.4	587.6	594.7	681.8	798.1	856.3	958.5	1163.1	1316.4	1339.4
132.5°	548.7	577.0	605.2	612.3	692.3	798.9	852.3	943.8	1126.9	1264.2	1284.8
135°	574.8	600.5	626.2	632.7	703.6	798.2	845.5	922.2	1075.5	1190.5	1208.2
137.5°	601.5	627.0	652.5	658.8	720.7	803.2	844.4	909.2	1038.8	1136.0	1150.5
140°	623.6	647.1	670.5	676.3	731.0	803.9	840.3	896.3	1008.4	1092.3	1105.9
142.5°	640.6	662.3	684.0	689.5	739.8	806.8	840.3	889.5	987.9	1061.7	1073.3
145°	666.7	685.6	704.5	709.3	751.1	806.8	834.7	874.9	955.4	1015.7	1024.5
147.5°	692.9	711.2	729.7	734.2	767.7	812.4	834.7	866.4	929.7	977.2	984.5
150°	709.8	726.4	743.1	747.3	776.5	815.3	834.7	861.4	914.9	955.0	960.9
152.5°	727.5	740.0	752.7	755.8	782.2	817.2	834.7	857.6	903.2	937.4	941.9
155°	753.5	762.9	772.2	774.5	794.6	821.3	834.7	852.9	889.2	916.4	919.3
157.5°	772.9	782.0	791.0	793.3	807.1	825.6	834.7	848.9	877.0	898.2	900.4
160°	785.9	793.0	800.0	801.8	812.8	827.4	834.7	846.8	871.0	889.2	890.3
162.5°	798.9	804.3	809.6	810.9	818.9	829.4	834.7	844.9	865.3	880.6	881.7
165°	813.2	817.9	822.7	823.9	827.5	832.3	834.7	842.1	856.7	867.6	868.8
167.5°	826.2	828.4	830.7	831.2	834.3	838.3	840.3	845.1	854.7	861.9	862.4
170°	834.7	836.9	839.2	839.8	840.0	840.2	840.3	845.1	854.7	861.9	861.9
172.5°	839.2	839.7	840.2	840.3	840.3	840.3	840.3	844.1	851.7	857.4	856.9
175°	845.5	845.5	845.5	845.5	843.7	841.4	840.3	842.7	847.6	851.2	851.2
177.5°	845.5	845.5	845.5	845.5	844.2	842.4	841.5	843.5	847.2	850.1	849.5
180°	845.5	845.5	845.5	845.5	845.5	845.5	845.5	845.5	845.5	845.5	845.5



TEST NUMBER: P936956

CATALOG NUMBER: SQ4-FB-050U-125D-93050-1D-UNV-STD-W-12-5000K

**CANDELA DISTRIBUTION (continued):**

	80°	90°
0°	1448.9	1448.9
2.5°	1546.8	1537.4
5°	1989.4	1998.6
7.5°	2678.8	2674.2
10°	3331.0	3373.0
12.5°	3806.3	3815.6
15°	4095.1	4113.8
17.5°	4207.0	4211.6
20°	4211.6	4202.3
22.5°	4160.4	4151.0
25°	4099.8	4095.1
27.5°	4043.9	4048.6
30°	4020.6	4034.6
32.5°	4020.6	4043.9
35°	4029.9	4053.2
37.5°	4025.3	4053.2
40°	4006.7	4039.2
42.5°	3955.4	3978.7
45°	3876.2	3904.1
47.5°	3773.7	3792.3
50°	3643.2	3661.9
52.5°	3480.2	3484.9
55°	3284.5	3303.2
57.5°	3074.8	3079.5
60°	2841.9	2855.9
62.5°	2595.0	2595.0
65°	2334.1	2343.4
67.5°	2063.9	2087.2
70°	1789.0	1793.6
72.5°	1518.8	1518.8
75°	1239.3	1243.9
77.5°	973.7	973.7
80°	722.1	726.8
82.5°	498.5	507.9
85°	312.1	312.1
87.5°	144.4	130.4
90°	21.6	21.6
92.5°	86.4	69.2
95°	301.0	249.1
97.5°	721.3	622.5
100°	1039.3	921.5
102.5°	1352.0	1251.2
105°	1750.9	1696.6
107.5°	2012.0	2025.2
110°	2111.6	2168.1





TEST NUMBER: P936956

CATALOG NUMBER: SQ4-FB-050U-125D-93050-1D-UNV-STD-W-12-5000K

**CANDELA DISTRIBUTION (continued):**

	80°	90°
112.5°	2120.6	2207.3
115°	2064.4	2184.7
117.5°	1945.1	2078.5
120°	1849.1	1978.6
122.5°	1755.5	1883.3
125°	1621.9	1739.8
127.5°	1501.9	1601.3
130°	1431.2	1523.0
132.5°	1367.0	1449.2
135°	1279.1	1349.9
137.5°	1208.5	1266.5
140°	1160.1	1214.3
142.5°	1120.0	1166.7
145°	1059.8	1095.2
147.5°	1013.7	1043.0
150°	984.6	1008.4
152.5°	959.8	977.7
155°	931.3	943.1
157.5°	908.6	917.0
160°	895.2	900.0
162.5°	886.3	890.9
165°	873.6	878.4
167.5°	864.5	866.5
170°	861.9	861.9
172.5°	855.2	853.5
175°	851.2	851.2
177.5°	847.5	845.5
180°	845.5	845.5



TEST NUMBER: P936956  
 CATALOG NUMBER: SQ4-FB-050U-125D-93050-1D-UNV-STD-W-12-5000K

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.65	8.75	8.43	9.56	10.56	20.84	21.94	21.63	22.75	23.75
	3H	8.37	9.36	9.17	10.18	11.21	22.70	23.69	23.50	24.52	25.54
	4H	8.68	9.62	9.50	10.45	11.49	23.36	24.30	24.18	25.13	26.17
	6H	8.94	9.81	9.77	10.65	11.70	23.81	24.67	24.64	25.51	26.57
	8H	9.02	9.84	9.86	10.70	11.76	23.94	24.76	24.78	25.62	26.68
	12H	9.04	9.83	9.89	10.68	11.76	24.02	24.81	24.86	25.66	26.74
4H	2H	14.90	15.84	15.72	16.67	17.71	21.14	22.08	21.96	22.91	23.95
	3H	16.49	17.27	17.32	18.14	19.19	23.21	24.00	24.05	24.86	25.92
	4H	16.59	17.31	17.44	18.17	19.25	23.99	24.71	24.84	25.57	26.66
	6H	16.62	17.24	17.48	18.13	19.21	24.55	25.17	25.41	26.06	27.15
	8H	16.60	17.18	17.47	18.06	19.16	24.72	25.31	25.59	26.19	27.29
	12H	16.57	17.09	17.46	18.00	19.10	24.83	25.36	25.72	26.26	27.36
8H	4H	18.06	18.64	18.93	19.53	20.63	24.08	24.66	24.94	25.54	26.64
	6H	18.31	18.80	19.21	19.72	20.82	24.72	25.20	25.61	26.13	27.23
	8H	18.34	18.77	19.24	19.68	20.80	24.95	25.38	25.85	26.29	27.41
	12H	18.32	18.69	19.22	19.60	20.77	25.11	25.48	26.01	26.39	27.56
12H	4H	18.22	18.74	19.10	19.65	20.75	24.04	24.57	24.93	25.47	26.57
	6H	18.58	19.01	19.48	19.93	21.04	24.71	25.14	25.61	26.05	27.17
	8H	18.66	19.04	19.57	19.95	21.12	24.95	25.33	25.86	26.24	27.41