

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P937158

Luminaire Tested: SQ4-FB-075U-075D-93050-1D-UNV-STD-W-4-3500K

Issue Date: 12/17/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P937158  
REPORT IS A COMBINATION OF REPORTS P933502 AND P933786  
Test Lab: INNOVATION CENTER  
Issue Date: 12/17/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ4-FB-075U-075D-93050-1D-UNV-STD-W-4-3500K  
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4836.4 lumens  
Efficiency: N/A  
Efficacy: 114.1 lumens/watt  
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33  
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 4' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 42.4  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P937158  
CATALOG NUMBER: SQ4-FB-075U-075D-93050-1D-UNV-STD-W-4-3500K

### Luminous Intensity Polar Plot

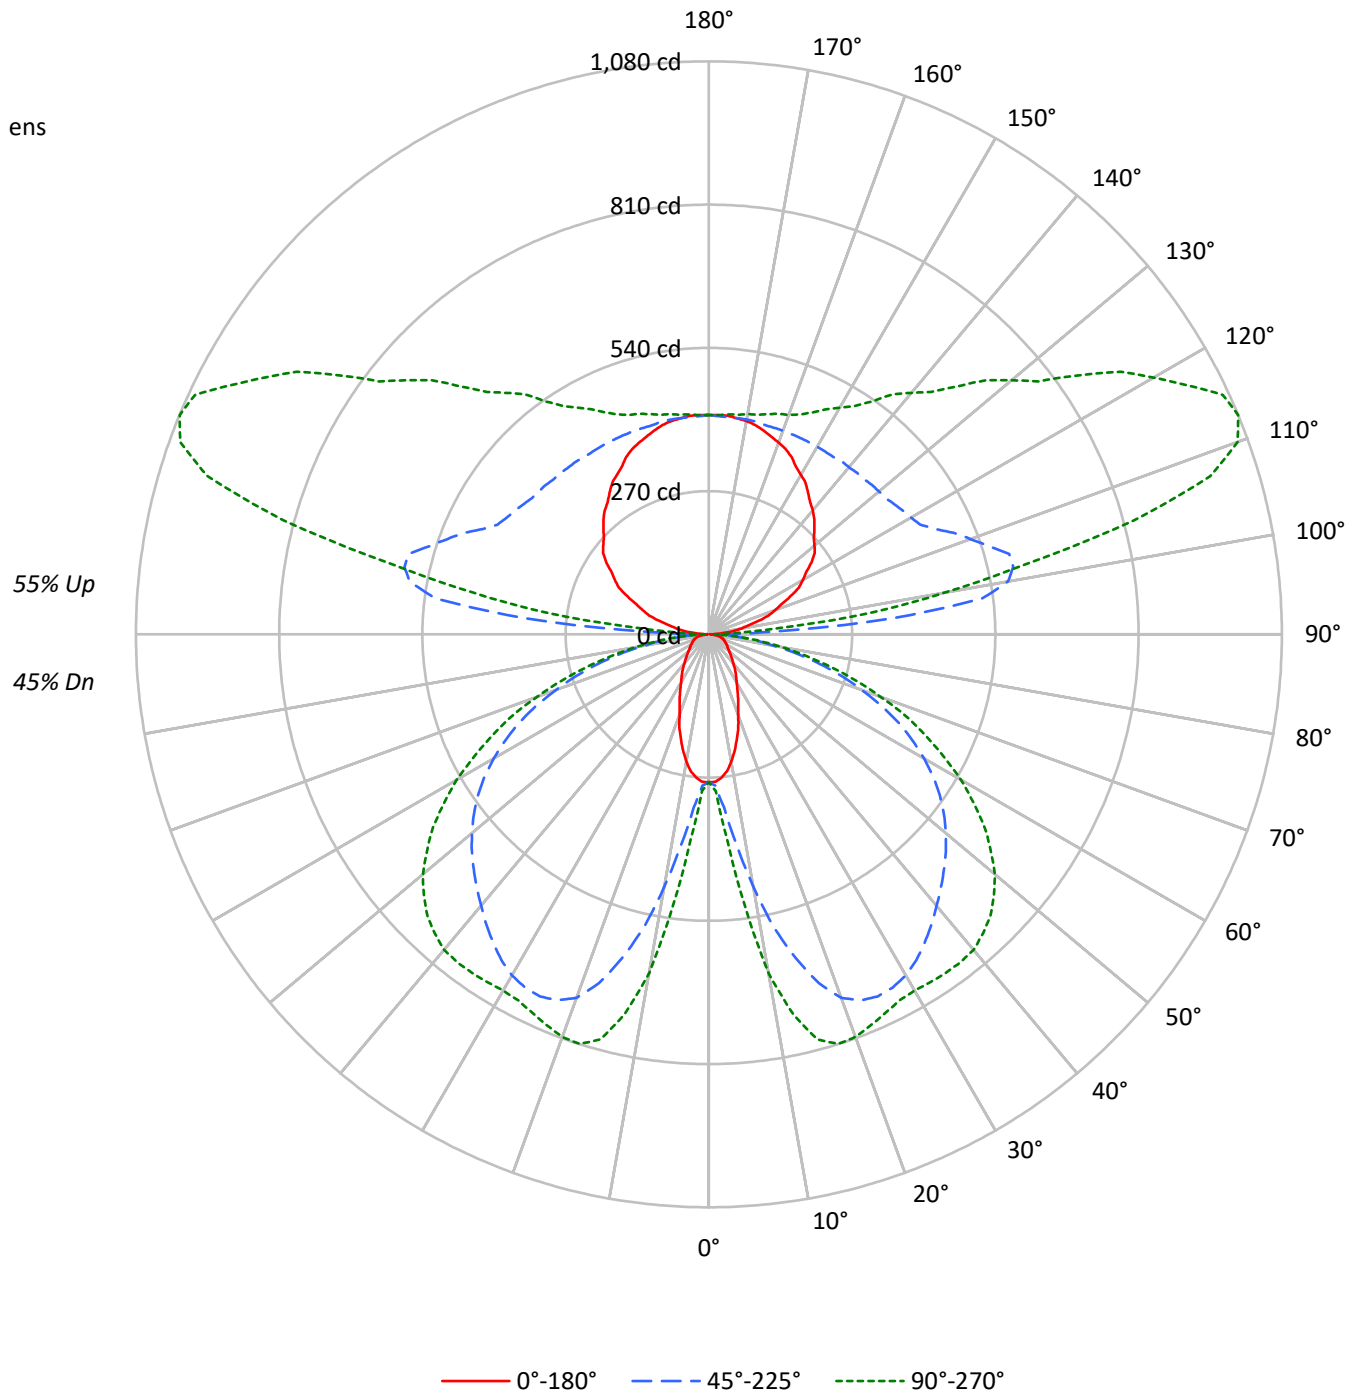



TEST NUMBER: P937158

CATALOG NUMBER: SQ4-FB-075U-075D-93050-1D-UNV-STD-W-4-3500K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	51	51	51	45
1	96	92	88	84	88	84	80	77	70	67	65	57	55	53	44	43	42	37
2	87	79	73	68	79	73	67	63	60	56	53	49	46	44	38	36	35	30
3	79	69	62	56	72	64	57	52	53	48	44	43	39	36	34	31	29	25
4	72	61	53	47	65	56	49	43	46	41	37	38	34	31	30	27	24	21
5	66	54	46	39	60	50	42	37	41	36	31	34	29	26	26	23	21	17
6	60	48	40	34	55	44	37	31	37	31	27	30	26	22	24	21	18	15
7	56	43	35	29	51	40	32	27	33	28	23	27	23	20	21	18	16	13
8	51	39	31	26	47	36	29	24	30	24	21	25	20	17	20	16	14	11
9	48	35	28	23	44	33	26	21	27	22	18	22	18	15	18	15	12	10
10	44	32	25	20	41	30	23	19	25	20	16	21	17	14	16	13	11	9

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	2583	2583	2583
5°	2522	2984	3473
10°	2284	4347	5758
15°	1939	5675	6953
20°	1577	6571	7086
25°	1314	6872	6942
30°	1107	6909	6928
35°	976	6789	7107
40°	849	6635	7292
45°	768	6519	7321
50°	702	6414	7200
55°	672	6264	6881
60°	685	5980	6376
65°	709	5554	5684
70°	749	4834	4802
75°	823	3932	3747
80°	880	2716	2526
85°	745	1433	1293

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 45°  
 Luminance: 7321 cd/sqm



TEST NUMBER: P937158

CATALOG NUMBER: SQ4-FB-075U-075D-93050-1D-UNV-STD-W-4-3500K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	36.0	0.7
10°-20°	159.6	3.3
20°-30°	279.2	5.8
30°-40°	359.4	7.4
40°-50°	401.5	8.3
50°-60°	384.5	8.0
60°-70°	304.7	6.3
70°-80°	179.2	3.7
80°-90°	51.4	1.1
90°-100°	201.6	4.2
100°-110°	530.0	11.0
110°-120°	549.5	11.4
120°-130°	440.8	9.1
130°-140°	345.9	7.2
140°-150°	265.5	5.5
150°-160°	191.2	4.0
160°-170°	117.0	2.4
170°-180°	39.5	0.8
0°-30°	474.9	9.8
0°-40°	834.3	17.3
0°-60°	1620.3	33.5
0°-90°	2155.6	44.6
90°-120°	1281.1	26.5
90°-150°	2333.1	48.2
90°-180°	2681.0	55.4
0°-180°	4836.4	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	278	278	278	278	278	
5°	271	291	328	371	384	25
15°	203	375	632	766	791	57
25°	130	425	753	786	787	60
35°	88	406	709	749	779	55
45°	60	324	627	718	750	46
55°	43	206	532	618	635	39
65°	34	109	395	444	450	34
75°	25	67	217	238	239	26
85°	9	21	54	59	60	10
90°	3	8	21	11	11	3
95°	27	104	347	179	122	30
105°	95	145	586	890	830	101
115°	170	206	469	936	1069	168
125°	236	264	427	721	851	209
135°	281	309	414	582	660	218
145°	326	347	408	497	536	204
155°	369	379	408	448	461	169
165°	398	403	408	424	430	112
175°	414	414	411	416	416	39
180°	414	414	414	414	414	



TEST NUMBER: P937158

CATALOG NUMBER: SQ4-FB-075U-075D-93050-1D-UNV-STD-W-4-3500K

**CANDELA DISTRIBUTION (FULL):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	278.4	278.4	278.4	278.4	278.4	278.4	278.4	278.4	278.4	278.4	278.4
2.5°	278.4	278.4	280.2	281.1	282.9	283.8	285.6	287.4	292.8	293.7	295.5
5°	271.3	274.9	286.5	291.0	303.5	320.5	327.7	339.3	363.5	370.7	375.1
7.5°	260.5	268.6	297.2	304.4	335.7	380.5	399.3	424.4	462.9	481.7	496.9
10°	243.5	260.5	311.6	328.6	379.6	447.7	482.6	517.5	575.7	601.6	611.5
12.5°	224.7	252.5	326.8	350.1	423.5	522.9	564.9	603.4	669.7	704.6	710.0
15°	203.2	240.8	341.1	375.1	470.0	585.5	632.1	679.5	741.3	766.4	772.7
17.5°	184.4	231.9	354.5	390.4	505.9	641.9	689.4	728.8	778.9	795.9	800.4
20°	161.2	217.6	363.5	410.1	543.5	683.1	728.8	759.2	793.2	804.0	805.8
22.5°	144.1	202.3	368.9	417.2	568.5	708.2	746.7	770.9	794.1	797.7	798.6
25°	129.8	185.3	368.0	425.3	590.0	723.4	753.0	770.9	784.3	786.1	786.1
27.5°	116.4	166.5	364.4	427.1	606.1	727.0	750.3	762.8	769.1	772.7	772.7
30°	104.8	148.6	355.4	423.5	613.3	723.4	742.2	748.5	754.7	760.1	762.8
32.5°	95.8	131.6	342.0	416.3	614.2	714.5	727.9	731.5	740.4	753.0	757.4
35°	87.7	114.6	326.8	406.5	608.8	700.1	709.1	712.7	730.6	749.4	755.6
37.5°	79.7	102.1	307.1	389.5	600.8	683.1	689.4	695.7	723.4	745.8	753.0
40°	71.6	91.3	283.8	370.7	588.2	662.5	667.9	677.8	714.5	740.4	747.6
42.5°	65.4	82.4	258.7	351.0	572.1	639.3	647.3	661.6	703.7	731.5	739.5
45°	60.0	73.4	231.9	324.1	551.5	615.1	626.7	646.4	691.2	718.0	725.2
47.5°	54.6	67.1	204.1	296.3	529.1	590.9	606.1	628.5	674.2	700.1	706.4
50°	50.1	60.9	176.4	266.8	505.0	564.9	582.8	606.1	652.7	676.9	684.9
52.5°	46.6	55.5	150.4	237.3	477.2	538.1	558.7	582.8	626.7	650.0	655.4
55°	43.0	51.0	128.0	205.9	448.6	509.4	531.8	555.1	598.1	617.8	621.3
57.5°	41.2	47.5	109.2	176.4	418.1	477.2	502.3	523.8	564.0	579.3	582.8
60°	38.5	44.8	94.9	151.3	385.0	446.8	468.2	489.7	523.8	536.3	539.0
62.5°	35.8	43.0	84.2	127.1	351.0	410.9	432.4	452.1	480.8	489.7	493.3
65°	34.0	41.2	76.1	109.2	316.0	373.3	394.8	411.8	435.1	444.1	445.9
67.5°	32.2	39.4	69.8	94.0	281.1	335.7	351.9	368.0	385.9	394.8	395.7
70°	29.5	37.6	64.5	83.3	245.3	292.8	306.2	323.2	337.5	342.0	344.7
72.5°	27.8	34.9	60.9	75.2	208.6	251.6	264.1	274.0	286.5	291.0	291.0
75°	25.1	31.3	57.3	67.1	171.0	205.9	216.7	226.5	236.4	238.2	235.5
77.5°	22.4	27.8	49.2	56.4	133.4	162.9	171.9	177.3	185.3	187.1	188.0
80°	18.8	24.2	38.5	43.9	96.7	120.0	126.2	130.7	137.9	137.9	139.7
82.5°	14.3	18.8	27.8	31.3	65.4	82.4	87.7	90.4	94.9	94.9	94.9
85°	9.0	11.6	17.9	20.6	39.4	50.1	53.7	54.6	58.2	59.1	59.1
87.5°	4.5	6.3	11.6	12.5	20.6	26.0	26.0	27.8	27.8	26.9	26.0
90°	2.8	5.0	7.3	7.8	12.3	18.2	21.1	18.8	14.1	10.6	10.6
92.5°	11.1	30.0	48.8	53.5	75.3	104.3	118.8	104.1	74.8	52.7	50.7
95°	26.7	61.2	95.8	104.4	185.3	293.2	347.2	309.8	235.0	179.0	172.6
97.5°	46.1	76.5	107.0	114.6	249.6	429.6	519.5	495.9	448.7	413.3	401.2
100°	61.1	88.6	116.3	123.2	273.0	472.7	572.6	574.3	577.7	580.3	565.9
102.5°	73.9	99.6	125.3	131.8	283.7	486.3	587.6	617.7	677.8	723.0	710.6
105°	95.4	117.3	139.1	144.6	291.7	487.9	585.9	653.4	788.3	889.5	882.9
107.5°	117.6	138.1	158.4	163.5	293.2	466.1	552.6	646.7	834.9	976.1	977.7
110°	132.7	151.0	169.5	174.0	291.0	446.9	524.8	630.0	840.4	998.3	1005.2



TEST NUMBER: P937158

CATALOG NUMBER: SQ4-FB-075U-075D-93050-1D-UNV-STD-W-4-3500K

**CANDELA DISTRIBUTION (continued):**

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	147.4	164.9	182.4	186.8	291.1	430.1	499.6	607.3	822.6	984.1	994.8
115°	169.6	185.7	201.9	205.9	293.8	410.8	469.3	573.1	780.5	936.1	950.8
117.5°	191.5	206.2	220.9	224.5	299.2	398.7	448.5	542.1	729.3	869.8	886.1
120°	204.3	218.1	231.9	235.4	303.6	394.7	440.1	525.7	696.8	825.1	841.0
122.5°	216.8	230.7	244.6	248.1	310.0	392.5	433.8	510.8	664.9	780.4	796.1
125°	235.9	248.6	261.3	264.5	318.6	390.8	426.9	492.3	623.2	721.4	735.8
127.5°	251.5	264.3	277.1	280.3	327.2	389.8	421.1	477.3	589.7	673.9	686.1
130°	259.8	273.6	287.4	290.9	333.5	390.4	418.8	468.9	568.9	643.9	655.1
132.5°	268.4	282.2	296.0	299.5	338.6	390.8	416.9	461.6	551.2	618.4	628.4
135°	281.1	293.7	306.3	309.4	344.2	390.4	413.5	451.1	526.1	582.3	591.0
137.5°	294.2	306.6	319.1	322.2	352.5	392.9	413.0	444.7	508.1	555.6	562.7
140°	305.0	316.5	328.0	330.8	357.6	393.2	411.0	438.4	493.1	534.2	540.9
142.5°	313.4	323.9	334.5	337.2	361.8	394.7	411.0	435.1	483.2	519.3	525.0
145°	326.1	335.4	344.6	346.9	367.3	394.7	408.3	428.0	467.3	496.8	501.1
147.5°	338.9	347.8	356.9	359.1	375.5	397.3	408.3	423.8	454.7	477.9	481.5
150°	347.2	355.3	363.5	365.6	379.8	398.8	408.3	421.3	447.5	467.1	469.9
152.5°	355.8	362.0	368.2	369.7	382.6	399.7	408.3	419.5	441.7	458.5	460.6
155°	368.6	373.2	377.6	378.8	388.7	401.7	408.3	417.1	434.9	448.2	449.6
157.5°	378.0	382.5	387.0	388.0	394.7	403.8	408.3	415.2	428.9	439.3	440.3
160°	384.4	387.8	391.3	392.1	397.5	404.7	408.3	414.2	426.1	434.9	435.5
162.5°	390.8	393.4	396.0	396.6	400.5	405.7	408.3	413.3	423.2	430.7	431.3
165°	397.7	400.0	402.4	403.0	404.8	407.1	408.3	411.8	419.0	424.4	425.0
167.5°	404.1	405.1	406.3	406.6	408.1	410.1	411.0	413.4	418.1	421.6	421.9
170°	408.3	409.3	410.5	410.8	410.9	410.9	411.0	413.4	418.1	421.6	421.6
172.5°	410.5	410.8	410.9	411.0	411.0	411.0	411.0	412.9	416.6	419.4	419.2
175°	413.5	413.5	413.5	413.5	412.7	411.6	411.0	412.2	414.5	416.3	416.3
177.5°	413.5	413.5	413.5	413.5	412.9	412.0	411.6	412.5	414.4	415.8	415.5
180°	413.5	413.5	413.5	413.5	413.5	413.5	413.5	413.5	413.5	413.5	413.5



TEST NUMBER: P937158

CATALOG NUMBER: SQ4-FB-075U-075D-93050-1D-UNV-STD-W-4-3500K

**CANDELA DISTRIBUTION (continued):**

	80°	90°
0°	278.4	278.4
2.5°	297.2	295.5
5°	382.3	384.1
7.5°	514.8	513.9
10°	640.1	648.2
12.5°	731.5	733.3
15°	787.0	790.6
17.5°	808.5	809.4
20°	809.4	807.6
22.5°	799.5	797.7
25°	787.9	787.0
27.5°	777.1	778.0
30°	772.7	775.3
32.5°	772.7	777.1
35°	774.4	778.9
37.5°	773.5	778.9
40°	770.0	776.2
42.5°	760.1	764.6
45°	744.9	750.3
47.5°	725.2	728.8
50°	700.1	703.7
52.5°	668.8	669.7
55°	631.2	634.8
57.5°	590.9	591.8
60°	546.1	548.8
62.5°	498.7	498.7
65°	448.6	450.3
67.5°	396.6	401.1
70°	343.8	344.7
72.5°	291.9	291.9
75°	238.2	239.0
77.5°	187.1	187.1
80°	138.8	139.7
82.5°	95.8	97.6
85°	60.0	60.0
87.5°	27.8	25.1
90°	10.6	10.6
92.5°	42.3	33.8
95°	147.3	121.9
97.5°	352.8	304.5
100°	508.4	450.7
102.5°	661.3	611.9
105°	856.4	829.9
107.5°	984.1	990.6
110°	1032.8	1060.5





TEST NUMBER: P937158

CATALOG NUMBER: SQ4-FB-075U-075D-93050-1D-UNV-STD-W-4-3500K

**CANDELA DISTRIBUTION (continued):**

	80°	90°
112.5°	1037.2	1079.7
115°	1009.7	1068.6
117.5°	951.4	1016.6
120°	904.4	967.7
122.5°	858.6	921.2
125°	793.3	850.9
127.5°	734.6	783.2
130°	700.0	744.9
132.5°	668.6	708.8
135°	625.6	660.3
137.5°	591.1	619.5
140°	567.4	593.9
142.5°	547.8	570.6
145°	518.4	535.7
147.5°	495.8	510.1
150°	481.6	493.2
152.5°	469.4	478.2
155°	455.4	461.3
157.5°	444.4	448.5
160°	437.8	440.1
162.5°	433.5	435.7
165°	427.3	429.7
167.5°	422.9	423.8
170°	421.6	421.6
172.5°	418.3	417.4
175°	416.3	416.3
177.5°	414.5	413.5
180°	413.5	413.5



TEST NUMBER: P937158  
 CATALOG NUMBER: SQ4-FB-075U-075D-93050-1D-UNV-STD-W-4-3500K

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	3.77	4.62	4.77	5.63	6.97	16.91	17.76	17.90	18.77	20.11
	3H	4.48	5.24	5.48	6.26	7.62	18.73	19.49	19.74	20.52	21.88
	4H	4.77	5.50	5.79	6.52	7.89	19.37	20.09	20.39	21.11	22.49
	6H	5.03	5.69	6.05	6.72	8.10	19.79	20.45	20.81	21.48	22.86
	8H	5.09	5.73	6.13	6.77	8.15	19.90	20.53	20.93	21.58	22.96
	12H	5.11	5.71	6.15	6.75	8.16	19.96	20.56	21.00	21.60	23.01
4H	2H	10.96	11.68	11.98	12.71	14.08	17.18	17.91	18.21	18.93	20.30
	3H	12.53	13.13	13.56	14.19	15.57	19.21	19.82	20.25	20.87	22.26
	4H	12.62	13.18	13.66	14.22	15.63	19.97	20.52	21.01	21.57	22.98
	6H	12.63	13.11	13.69	14.18	15.58	20.50	20.97	21.55	22.04	23.44
	8H	12.61	13.06	13.66	14.12	15.54	20.65	21.10	21.70	22.16	23.58
	12H	12.57	12.97	13.64	14.04	15.47	20.74	21.14	21.81	22.21	23.64
8H	4H	14.06	14.50	15.11	15.56	16.98	20.03	20.48	21.08	21.54	22.96
	6H	14.30	14.67	15.37	15.77	17.19	20.65	21.02	21.72	22.12	23.53
	8H	14.32	14.64	15.40	15.73	17.16	20.86	21.18	21.94	22.27	23.70
	12H	14.29	14.57	15.37	15.65	17.13	20.99	21.28	22.08	22.36	23.84
12H	4H	14.20	14.60	15.27	15.67	17.10	19.98	20.39	21.05	21.46	22.89
	6H	14.55	14.88	15.64	15.96	17.40	20.63	20.96	21.71	22.04	23.48
	8H	14.62	14.91	15.71	15.99	17.46	20.85	21.14	21.94	22.22	23.69