

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P937361

Luminaire Tested: SQ4-FB-075U-125D-93050-1D-UNV-STD-W-6-3000K

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P937361
REPORT IS A COMBINATION OF REPORTS P933512 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-075U-125D-93050-1D-UNV-STD-W-6-3000K
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 9310.8 lumens
Efficiency: N/A
Efficacy: 100.1 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 6' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 93
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P937361
CATALOG NUMBER: SQ4-FB-075U-125D-93050-1D-UNV-STD-W-6-3000K

Luminous Intensity Polar Plot

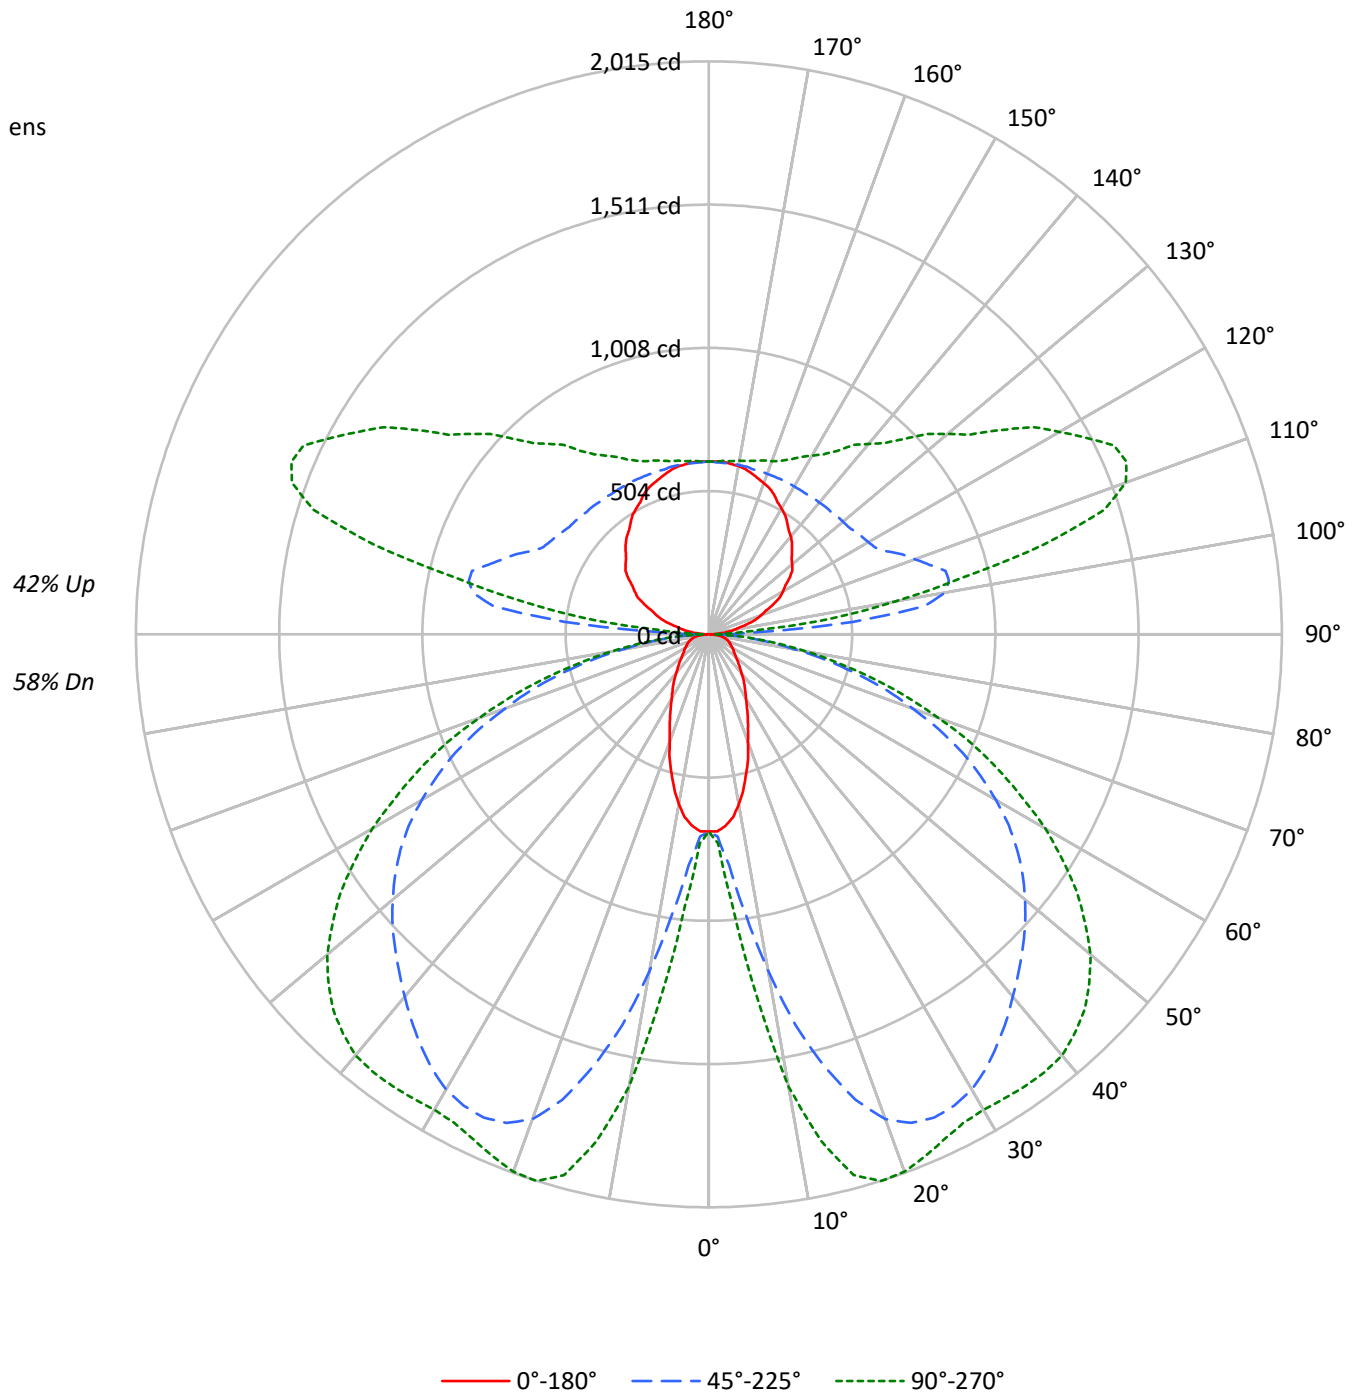



TEST NUMBER: P937361

CATALOG NUMBER: SQ4-FB-075U-125D-93050-1D-UNV-STD-W-6-3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	109	109	109	109	101	101	101	101	88	88	88	75	75	75	63	63	63	58		
1	99	94	90	86	92	88	84	81	76	73	71	65	63	61	55	53	52	47		
2	89	82	75	69	83	76	70	65	66	61	57	56	53	50	47	45	43	38		
3	81	71	63	57	75	66	59	54	57	52	47	49	45	41	41	38	36	32		
4	74	62	54	48	68	58	51	45	50	45	40	43	39	35	36	33	30	27		
5	68	55	47	40	63	52	44	38	45	39	34	38	34	30	33	29	26	23		
6	62	49	41	35	57	46	38	33	40	34	29	34	29	26	29	25	22	19		
7	57	44	36	30	53	41	34	28	36	30	25	31	26	22	26	22	19	17		
8	53	40	32	26	49	37	30	25	33	27	22	28	23	20	24	20	17	15		
9	49	36	28	23	46	34	27	22	30	24	20	26	21	17	22	18	15	13		
10	46	33	26	21	43	31	24	20	27	22	18	24	19	16	20	16	14	12		

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4289	4289	4289
5°	4189	4956	5766
10°	3798	7223	9558
15°	3227	9434	11541
20°	2626	10930	11762
25°	2190	11435	11523
30°	1846	11504	11502
35°	1631	11310	11799
40°	1421	11059	12106
45°	1286	10874	12153
50°	1178	10707	11952
55°	1127	10463	11423
60°	1152	9999	10586
65°	1198	9296	9437
70°	1273	8102	7973
75°	1404	6599	6221
80°	1523	4571	4192
85°	1330	2422	2146

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 12153 cd/sqm



TEST NUMBER: P937361

CATALOG NUMBER: SQ4-FB-075U-125D-93050-1D-UNV-STD-W-6-3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	89.7	1.0
10°-20°	397.5	4.3
20°-30°	695.3	7.5
30°-40°	895.0	9.6
40°-50°	999.7	10.7
50°-60°	957.5	10.3
60°-70°	758.8	8.2
70°-80°	446.2	4.8
80°-90°	126.3	1.4
90°-100°	296.6	3.2
100°-110°	779.8	8.4
110°-120°	808.6	8.7
120°-130°	648.6	7.0
130°-140°	508.9	5.5
140°-150°	390.6	4.2
150°-160°	281.3	3.0
160°-170°	172.1	1.8
170°-180°	58.1	0.6
0°-30°	1182.5	12.7
0°-40°	2077.5	22.3
0°-60°	4034.8	43.3
0°-90°	5366.1	57.6
90°-120°	1885.0	20.2
90°-150°	3433.2	36.9
90°-180°	3945.0	42.4
0°-180°	9310.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	693	693	693	693	693	
5°	676	725	816	923	956	62
15°	506	934	1574	1908	1969	141
25°	323	1059	1875	1958	1960	149
35°	218	1012	1766	1866	1940	136
45°	149	807	1561	1788	1868	116
55°	107	513	1324	1538	1581	98
65°	85	272	983	1106	1121	84
75°	62	167	540	593	595	65
85°	22	51	134	147	149	24
90°	4	11	31	16	16	5
95°	39	154	511	263	179	44
105°	140	213	862	1309	1221	149
115°	250	303	691	1378	1572	246
125°	347	389	628	1061	1252	308
135°	414	455	608	857	972	320
145°	480	510	601	731	788	301
155°	542	558	601	660	679	249
165°	585	593	601	624	632	165
175°	608	608	605	613	613	58
180°	608	608	608	608	608	



TEST NUMBER: P937361

CATALOG NUMBER: SQ4-FB-075U-125D-93050-1D-UNV-STD-W-6-3000K

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	693.3	693.3	693.3	693.3	693.3	693.3	693.3	693.3	693.3	693.3	693.3
2.5°	693.3	693.3	697.8	700.0	704.5	706.8	711.2	715.6	729.0	731.3	735.8
5°	675.5	684.5	713.4	724.6	755.8	798.1	815.9	844.9	905.2	923.0	934.2
7.5°	648.8	668.8	740.1	758.0	836.1	947.5	994.3	1056.8	1152.6	1199.4	1237.4
10°	606.4	648.8	775.8	818.2	945.3	1114.7	1201.7	1288.6	1433.6	1498.2	1522.7
12.5°	559.6	628.7	813.7	871.7	1054.5	1302.0	1406.8	1502.6	1667.6	1754.6	1767.9
15°	506.1	599.7	849.4	934.2	1170.4	1458.1	1574.0	1692.1	1846.0	1908.4	1924.0
17.5°	459.3	577.4	882.9	972.0	1259.7	1598.5	1716.6	1814.7	1939.6	1982.0	1993.1
20°	401.3	541.7	905.2	1021.1	1353.3	1701.1	1814.7	1890.5	1975.3	2002.0	2006.5
22.5°	359.0	503.9	918.5	1038.9	1415.7	1763.5	1859.4	1919.5	1977.5	1986.5	1988.6
25°	323.3	461.5	916.3	1059.0	1469.2	1801.4	1875.0	1919.5	1953.0	1957.5	1957.5
27.5°	289.8	414.6	907.4	1063.4	1509.4	1810.3	1868.2	1899.5	1915.0	1924.0	1924.0
30°	260.9	370.1	885.1	1054.5	1527.2	1801.4	1848.2	1863.8	1879.4	1892.8	1899.5
32.5°	238.5	327.7	851.6	1036.7	1529.4	1779.1	1812.5	1821.4	1843.7	1875.0	1886.1
35°	218.5	285.4	813.7	1012.2	1516.0	1743.4	1765.7	1774.6	1819.2	1866.0	1881.7
37.5°	198.4	254.2	764.7	969.8	1495.9	1701.1	1716.6	1732.3	1801.4	1857.1	1875.0
40°	178.4	227.4	706.8	923.0	1464.7	1649.8	1663.2	1687.7	1779.1	1843.7	1861.6
42.5°	162.7	205.1	644.3	873.9	1424.6	1591.8	1611.9	1647.5	1752.3	1821.4	1841.5
45°	149.4	182.8	577.4	807.1	1373.3	1531.6	1560.6	1609.7	1721.1	1788.0	1805.9
47.5°	136.0	167.2	508.3	737.9	1317.6	1471.4	1509.4	1565.0	1678.8	1743.4	1759.1
50°	124.8	151.6	439.2	664.3	1257.4	1406.8	1451.4	1509.4	1625.3	1685.5	1705.5
52.5°	115.9	138.2	374.5	590.8	1188.3	1339.8	1391.1	1451.4	1560.6	1618.5	1632.0
55°	107.0	127.1	318.8	512.8	1116.9	1268.5	1324.3	1382.3	1489.2	1538.3	1547.2
57.5°	102.6	118.1	272.0	439.2	1041.1	1188.3	1250.7	1304.2	1404.6	1442.4	1451.4
60°	95.8	111.5	236.4	376.8	958.7	1112.5	1166.0	1219.5	1304.2	1335.5	1342.1
62.5°	89.1	107.0	209.6	316.5	873.9	1023.3	1076.8	1125.9	1197.2	1219.5	1228.4
65°	84.8	102.6	189.5	272.0	787.0	929.7	983.2	1025.5	1083.5	1105.8	1110.3
67.5°	80.3	98.1	173.9	234.1	700.0	836.1	876.2	916.3	960.9	983.2	985.5
70°	73.6	93.6	160.6	207.4	610.9	729.0	762.5	804.8	840.5	851.6	858.4
72.5°	69.1	87.0	151.6	187.3	519.4	626.5	657.7	682.2	713.4	724.6	724.6
75°	62.4	78.0	142.7	167.2	425.8	512.8	539.5	564.0	588.5	593.0	586.4
77.5°	55.8	69.1	122.6	140.4	332.2	405.8	428.1	441.4	461.5	465.9	468.2
80°	46.8	60.2	95.8	109.3	240.7	298.7	314.3	325.5	343.3	343.3	347.8
82.5°	35.7	46.8	69.1	78.0	162.7	205.1	218.5	225.2	236.4	236.4	236.4
85°	22.3	29.0	44.6	51.3	98.1	124.8	133.8	136.0	144.9	147.1	147.1
87.5°	11.2	15.6	29.0	31.2	51.3	64.6	64.6	69.1	69.1	66.9	64.6
90°	4.0	7.3	10.6	11.4	17.9	26.6	31.0	27.6	20.7	15.5	15.5
92.5°	16.3	44.1	71.8	78.8	110.8	153.4	174.8	153.2	110.0	77.6	74.5
95°	39.2	90.0	140.8	153.5	272.6	431.5	510.9	455.9	345.9	263.4	254.1
97.5°	67.8	112.6	157.4	168.6	367.3	632.1	764.6	729.8	660.3	608.1	590.3
100°	89.9	130.5	171.2	181.4	401.7	695.6	842.6	845.1	850.2	854.0	832.8
102.5°	108.6	146.6	184.5	194.0	417.5	715.6	864.6	908.9	997.5	1063.9	1045.7
105°	140.5	172.7	204.8	212.8	429.2	717.8	862.1	961.4	1160.0	1308.9	1299.2
107.5°	173.2	203.2	233.1	240.6	431.4	685.9	813.1	951.6	1228.7	1436.4	1438.7
110°	195.2	222.3	249.3	256.0	428.1	657.6	772.3	927.1	1236.8	1469.0	1479.2



TEST NUMBER: P937361

CATALOG NUMBER: SQ4-FB-075U-125D-93050-1D-UNV-STD-W-6-3000K

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	216.9	242.6	268.4	274.8	428.3	632.8	735.1	893.6	1210.5	1448.1	1463.8
115°	249.5	273.3	297.0	303.0	432.2	604.4	690.6	843.3	1148.6	1377.5	1399.1
117.5°	281.8	303.4	325.0	330.4	440.3	586.7	660.0	797.8	1073.3	1279.9	1303.9
120°	300.6	320.9	341.2	346.3	446.8	580.7	647.7	773.6	1025.3	1214.2	1237.5
122.5°	319.0	339.5	360.0	365.1	456.2	577.7	638.3	751.6	978.3	1148.4	1171.4
125°	347.1	365.8	384.5	389.2	468.8	575.0	628.2	724.4	917.0	1061.4	1082.6
127.5°	370.0	388.9	407.7	412.5	481.5	573.5	619.6	702.2	867.6	991.6	1009.5
130°	382.2	402.6	422.9	428.0	490.8	574.5	616.3	689.9	837.1	947.5	964.0
132.5°	394.9	415.3	435.5	440.6	498.3	575.0	613.4	679.3	811.1	909.9	924.7
135°	413.7	432.2	450.7	455.4	506.4	574.5	608.5	663.6	774.0	856.8	869.5
137.5°	432.9	451.2	469.5	474.1	518.6	578.0	607.7	654.3	747.6	817.6	828.1
140°	448.8	465.7	482.6	486.8	526.2	578.6	604.8	645.1	725.7	786.2	795.9
142.5°	461.1	476.7	492.4	496.2	532.4	580.6	604.8	640.2	711.0	764.1	772.6
145°	479.9	493.5	507.0	510.5	540.6	580.7	600.8	629.7	687.6	731.0	737.3
147.5°	498.6	511.9	525.1	528.5	552.5	584.7	600.8	623.5	669.1	703.3	708.5
150°	510.9	522.9	534.9	537.9	558.9	586.8	600.8	620.0	658.5	687.4	691.7
152.5°	523.6	532.7	541.7	544.0	562.9	588.1	600.8	617.2	650.0	674.7	678.0
155°	542.4	549.0	555.8	557.5	571.9	591.1	600.8	613.8	640.0	659.6	661.7
157.5°	556.2	562.8	569.3	571.0	580.9	594.2	600.8	610.9	631.2	646.5	648.0
160°	565.6	570.7	575.8	577.0	584.9	595.5	600.8	609.5	626.8	639.9	640.8
162.5°	575.0	578.9	582.7	583.6	589.3	597.0	600.8	608.1	622.8	633.9	634.7
165°	585.2	588.7	592.2	593.0	595.6	599.0	600.8	606.0	616.6	624.5	625.4
167.5°	594.6	596.3	597.9	598.3	600.5	603.4	604.8	608.2	615.2	620.3	620.7
170°	600.8	602.4	604.0	604.4	604.5	604.7	604.8	608.2	615.2	620.3	620.3
172.5°	604.0	604.4	604.7	604.8	604.8	604.8	604.8	607.5	613.0	617.1	616.7
175°	608.5	608.5	608.5	608.5	607.3	605.6	604.8	606.6	610.0	612.6	612.6
177.5°	608.5	608.5	608.5	608.5	607.5	606.3	605.7	607.1	609.8	611.8	611.5
180°	608.5	608.5	608.5	608.5	608.5	608.5	608.5	608.5	608.5	608.5	608.5



TEST NUMBER: P937361

CATALOG NUMBER: SQ4-FB-075U-125D-93050-1D-UNV-STD-W-6-3000K

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	693.3	693.3
2.5°	740.1	735.8
5°	952.0	956.5
7.5°	1282.0	1279.7
10°	1594.0	1614.1
12.5°	1821.4	1825.9
15°	1959.7	1968.6
17.5°	2013.2	2015.4
20°	2015.4	2011.0
22.5°	1990.8	1986.5
25°	1961.9	1959.7
27.5°	1935.2	1937.4
30°	1924.0	1930.7
32.5°	1924.0	1935.2
35°	1928.5	1939.6
37.5°	1926.2	1939.6
40°	1917.3	1932.9
42.5°	1892.8	1904.0
45°	1854.9	1868.2
47.5°	1805.9	1814.7
50°	1743.4	1752.3
52.5°	1665.3	1667.6
55°	1571.7	1580.7
57.5°	1471.4	1473.6
60°	1360.0	1366.6
62.5°	1241.8	1241.8
65°	1116.9	1121.4
67.5°	987.6	998.8
70°	856.1	858.4
72.5°	726.8	726.8
75°	593.0	595.2
77.5°	465.9	465.9
80°	345.5	347.8
82.5°	238.5	243.0
85°	149.4	149.4
87.5°	69.1	62.4
90°	15.5	15.5
92.5°	62.1	49.8
95°	216.7	179.3
97.5°	519.2	448.0
100°	748.0	663.2
102.5°	973.2	900.5
105°	1260.1	1221.1
107.5°	1448.1	1457.5
110°	1519.8	1560.5



TEST NUMBER: P937361

CATALOG NUMBER: SQ4-FB-075U-125D-93050-1D-UNV-STD-W-6-3000K

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	1526.2	1588.7
115°	1485.7	1572.3
117.5°	1399.9	1495.9
120°	1330.8	1424.1
122.5°	1263.4	1355.5
125°	1167.4	1252.2
127.5°	1081.0	1152.5
130°	1030.1	1096.1
132.5°	983.9	1043.1
135°	920.5	971.6
137.5°	869.8	911.6
140°	835.0	874.0
142.5°	806.1	839.7
145°	762.8	788.2
147.5°	729.5	750.6
150°	708.7	725.7
152.5°	690.8	703.7
155°	670.2	678.8
157.5°	654.0	660.0
160°	644.2	647.7
162.5°	637.9	641.2
165°	628.8	632.2
167.5°	622.2	623.6
170°	620.3	620.3
172.5°	615.5	614.2
175°	612.6	612.6
177.5°	610.0	608.5
180°	608.5	608.5



TEST NUMBER: P937361

CATALOG NUMBER: SQ4-FB-075U-125D-93050-1D-UNV-STD-W-6-3000K

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.73	7.71	7.61	8.61	9.77	19.89	20.87	20.77	21.78	22.93
	3H	7.44	8.32	8.33	9.24	10.42	21.73	22.62	22.63	23.53	24.71
	4H	7.74	8.58	8.65	9.50	10.69	22.38	23.22	23.29	24.14	25.33
	6H	8.00	8.77	8.92	9.70	10.90	22.81	23.59	23.73	24.51	25.72
	8H	8.07	8.81	9.00	9.76	10.96	22.94	23.67	23.86	24.62	25.82
	12H	8.10	8.80	9.03	9.74	10.96	23.01	23.71	23.94	24.65	25.88
4H	2H	13.95	14.78	14.86	15.71	16.89	20.18	21.02	21.09	21.94	23.13
	3H	15.53	16.23	16.45	17.18	18.38	22.23	22.93	23.16	23.89	25.09
	4H	15.63	16.27	16.56	17.21	18.44	23.00	23.64	23.94	24.59	25.82
	6H	15.65	16.20	16.59	17.17	18.40	23.54	24.10	24.49	25.07	26.30
	8H	15.63	16.14	16.58	17.11	18.35	23.71	24.22	24.66	25.19	26.43
	12H	15.59	16.06	16.56	17.04	18.29	23.80	24.27	24.77	25.25	26.50
8H	4H	17.08	17.60	18.03	18.56	19.81	23.07	23.59	24.02	24.56	25.80
	6H	17.33	17.76	18.30	18.76	20.01	23.70	24.13	24.68	25.14	26.38
	8H	17.35	17.73	18.33	18.72	19.98	23.92	24.30	24.91	25.30	26.56
	12H	17.32	17.66	18.31	18.65	19.95	24.07	24.40	25.06	25.39	26.70
12H	4H	17.23	17.70	18.20	18.68	19.93	23.03	23.50	24.00	24.48	25.73
	6H	17.59	17.97	18.57	18.96	20.22	23.69	24.07	24.67	25.06	26.32
	8H	17.66	18.00	18.65	18.99	20.29	23.92	24.26	24.91	25.25	26.55