

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P937957

Luminaire Tested: SQ4-FB-125U-075D-93050-1D-UNV-STD-W-4-3000K

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P937957
REPORT IS A COMBINATION OF REPORTS P933598 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-125U-075D-93050-1D-UNV-STD-W-4-3000K
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6508.1 lumens
Efficiency: N/A
Efficacy: 117.1 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 4' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 55.6
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P937957
CATALOG NUMBER: SQ4-FB-125U-075D-93050-1D-UNV-STD-W-4-3000K

Luminous Intensity Polar Plot

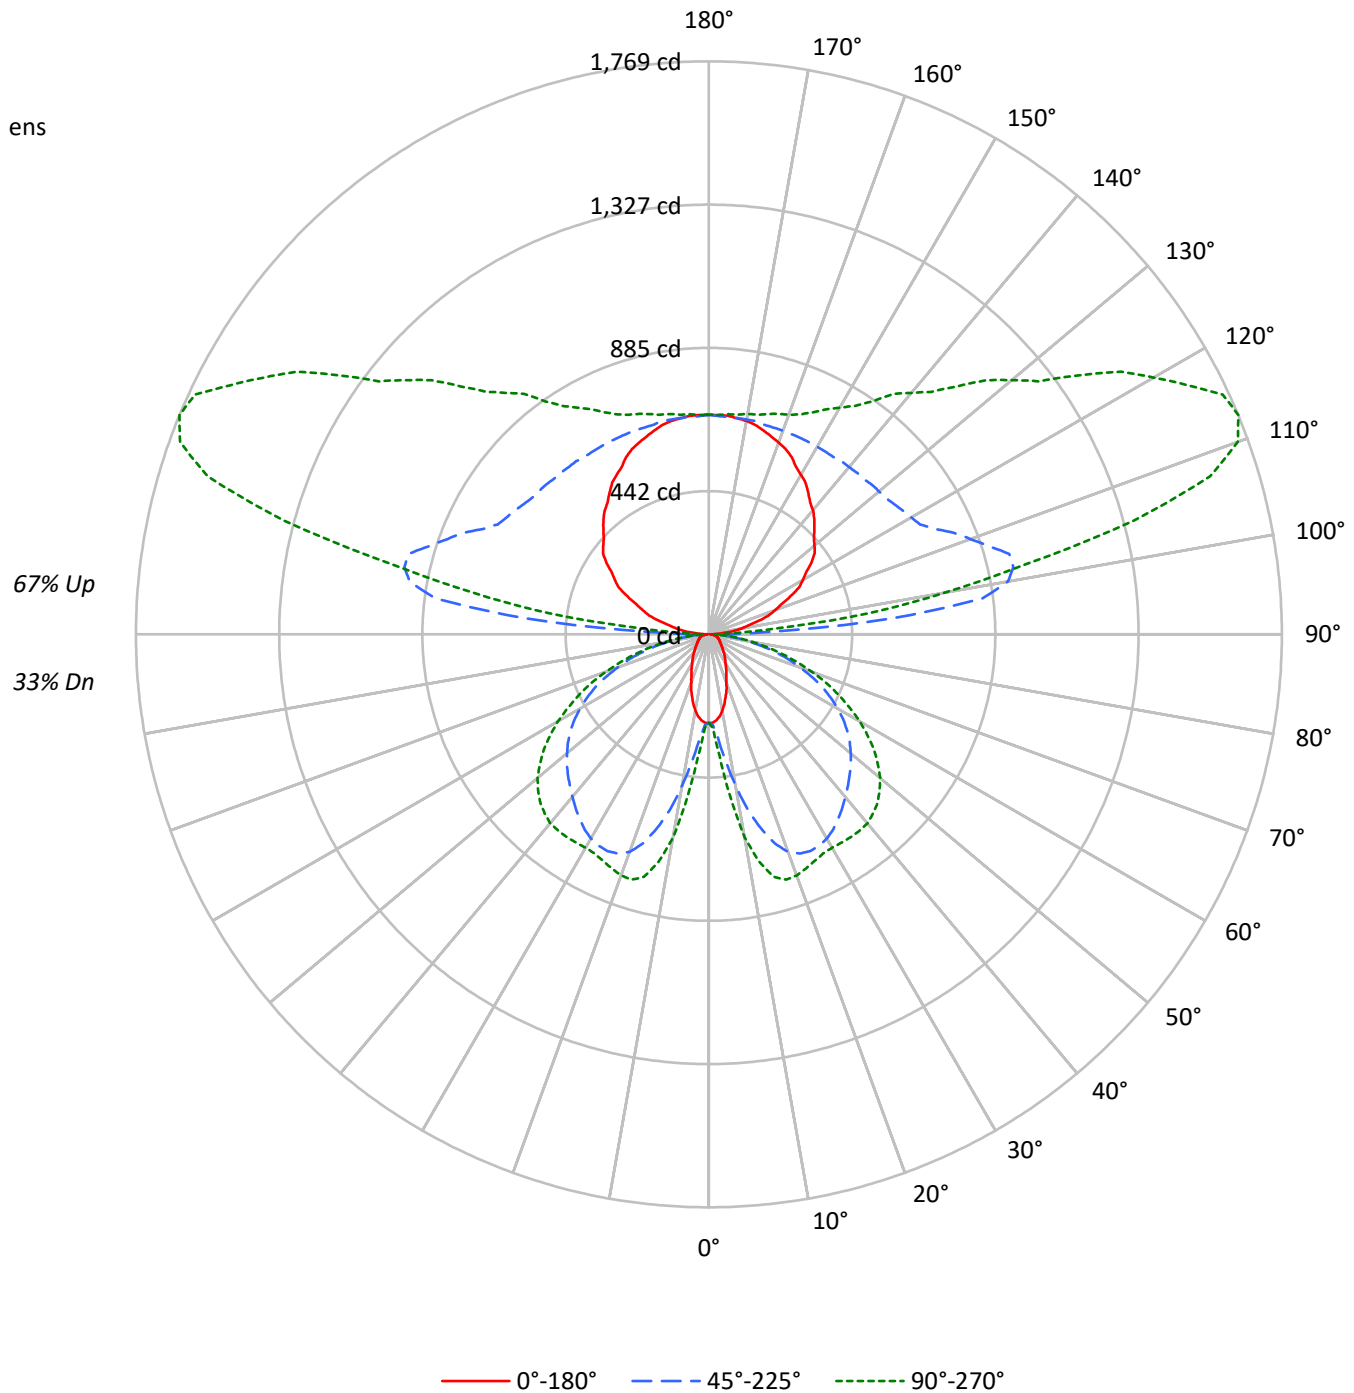



TEST NUMBER: P937957

CATALOG NUMBER: SQ4-FB-125U-075D-93050-1D-UNV-STD-W-4-3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	93	93	93	93	74	74	74	56	56	56	40	40	40	33
1	94	89	85	82	84	80	77	74	64	62	60	49	47	46	35	34	33	27
2	85	77	71	66	76	70	65	60	55	52	49	42	40	38	30	29	27	22
3	77	68	60	54	69	61	55	50	49	44	40	37	34	31	26	24	23	18
4	70	59	52	46	63	54	47	42	43	38	34	33	29	26	23	21	19	15
5	64	53	45	39	57	48	41	35	38	33	29	29	25	23	21	18	16	13
6	59	47	39	33	53	42	35	30	34	29	25	26	22	19	19	16	14	11
7	54	42	34	29	49	38	31	26	31	25	22	23	20	17	17	14	12	10
8	50	38	30	25	45	34	28	23	28	23	19	21	18	15	15	13	11	8
9	47	34	27	22	42	31	25	20	25	20	17	19	16	13	14	12	10	7
10	43	31	24	19	39	28	22	18	23	18	15	18	14	12	13	10	9	7

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2535	2535	2535
5°	2473	2928	3407
10°	2241	4264	5648
15°	1903	5567	6820
20°	1547	6446	6950
25°	1289	6741	6809
30°	1086	6778	6797
35°	959	6660	6972
40°	834	6508	7154
45°	753	6395	7182
50°	690	6293	7063
55°	659	6145	6750
60°	672	5868	6256
65°	696	5448	5577
70°	736	4743	4710
75°	807	3856	3676
80°	861	2664	2477
85°	729	1407	1267

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 7182 cd/sqm



TEST NUMBER: P937957

CATALOG NUMBER: SQ4-FB-125U-075D-93050-1D-UNV-STD-W-4-3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	35.3	0.5
10°-20°	156.6	2.4
20°-30°	273.9	4.2
30°-40°	352.6	5.4
40°-50°	393.8	6.1
50°-60°	377.2	5.8
60°-70°	298.9	4.6
70°-80°	175.8	2.7
80°-90°	51.4	0.8
90°-100°	330.3	5.1
100°-110°	868.4	13.3
110°-120°	900.4	13.8
120°-130°	722.2	11.1
130°-140°	566.7	8.7
140°-150°	434.9	6.7
150°-160°	313.2	4.8
160°-170°	191.7	2.9
170°-180°	64.7	1.0
0°-30°	465.8	7.2
0°-40°	818.5	12.6
0°-60°	1589.5	24.4
0°-90°	2115.7	32.5
90°-120°	2099.0	32.3
90°-150°	3822.8	58.7
90°-180°	4392.0	67.5
0°-180°	6508.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	273	273	273	273	273	
5°	266	285	322	364	377	25
15°	199	368	620	752	776	55
25°	127	417	739	771	772	59
35°	86	399	696	735	764	54
45°	59	318	615	704	736	46
55°	42	202	522	606	623	38
65°	33	107	387	436	442	33
75°	25	66	212	234	234	26
85°	9	20	53	58	59	9
90°	5	13	34	17	17	4
95°	44	171	569	293	200	48
105°	156	237	960	1458	1360	166
115°	278	337	769	1534	1751	274
125°	386	433	699	1182	1394	343
135°	461	507	678	954	1082	356
145°	534	568	669	814	878	335
155°	604	621	669	734	756	277
165°	652	660	669	695	704	184
175°	678	678	674	682	682	64
180°	678	678	678	678	678	



TEST NUMBER: P937957

CATALOG NUMBER: SQ4-FB-125U-075D-93050-1D-UNV-STD-W-4-3000K

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	273.2	273.2	273.2	273.2	273.2	273.2	273.2	273.2	273.2	273.2	273.2
2.5°	273.2	273.2	274.9	275.8	277.5	278.4	280.2	281.9	287.2	288.1	289.8
5°	266.1	269.6	281.1	285.4	297.7	314.4	321.5	332.9	356.6	363.6	368.0
7.5°	255.6	263.5	291.6	298.6	329.4	373.3	391.7	416.3	454.1	472.5	487.5
10°	238.9	255.6	305.6	322.3	372.4	439.2	473.4	507.7	564.7	590.2	599.9
12.5°	220.5	247.7	320.6	343.4	415.4	512.9	554.2	592.0	657.0	691.2	696.5
15°	199.4	236.3	334.6	368.0	461.1	574.4	620.1	666.6	727.2	751.8	758.0
17.5°	180.9	227.5	347.8	382.9	496.2	629.7	676.3	714.9	764.1	780.8	785.2
20°	158.1	213.4	356.6	402.3	533.1	670.1	714.9	744.8	778.2	788.7	790.5
22.5°	141.4	198.5	361.9	409.3	557.7	694.7	732.5	756.2	779.1	782.6	783.4
25°	127.4	181.8	361.0	417.2	578.8	709.7	738.7	756.2	769.4	771.1	771.1
27.5°	114.2	163.4	357.5	418.9	594.6	713.2	736.0	748.3	754.5	758.0	758.0
30°	102.8	145.8	348.7	415.4	601.6	709.7	728.1	734.3	740.4	745.7	748.3
32.5°	94.0	129.1	335.5	408.4	602.5	700.9	714.1	717.6	726.4	738.7	743.0
35°	86.1	112.4	320.6	398.7	597.2	686.8	695.6	699.1	716.7	735.1	741.3
37.5°	78.2	100.1	301.3	382.1	589.3	670.1	676.3	682.4	709.7	731.6	738.7
40°	70.3	89.6	278.4	363.6	577.0	649.9	655.2	664.9	700.9	726.4	733.4
42.5°	64.1	80.8	253.8	344.3	561.2	627.1	635.0	649.1	690.3	717.6	725.5
45°	58.8	72.0	227.5	317.9	541.0	603.4	614.8	634.1	678.0	704.4	711.4
47.5°	53.6	65.9	200.3	290.7	519.1	579.7	594.6	616.6	661.4	686.8	693.0
50°	49.2	59.7	173.0	261.7	495.4	554.2	571.8	594.6	640.3	664.0	671.9
52.5°	45.7	54.5	147.6	232.7	468.1	527.9	548.1	571.8	614.8	637.6	642.9
55°	42.2	50.1	125.6	202.0	440.0	499.8	521.7	544.5	586.7	606.0	609.5
57.5°	40.4	46.5	107.2	173.0	410.2	468.1	492.7	513.8	553.3	568.3	571.8
60°	37.8	43.9	93.1	148.4	377.7	438.3	459.4	480.4	513.8	526.1	528.7
62.5°	35.1	42.2	82.6	124.7	344.3	403.1	424.2	443.5	471.6	480.4	483.9
65°	33.4	40.4	74.7	107.2	310.0	366.3	387.3	404.0	426.9	435.6	437.4
67.5°	31.6	38.6	68.5	92.2	275.8	329.4	345.2	361.0	378.5	387.3	388.2
70°	29.0	36.9	63.2	81.7	240.7	287.2	300.4	317.1	331.1	335.5	338.1
72.5°	27.2	34.3	59.7	73.8	204.6	246.8	259.1	268.8	281.1	285.4	285.4
75°	24.6	30.7	56.2	65.9	167.8	202.0	212.5	222.2	231.9	233.6	231.0
77.5°	22.0	27.2	48.3	55.3	130.9	159.9	168.6	173.9	181.8	183.6	184.4
80°	18.4	23.7	37.8	43.0	94.9	117.7	123.8	128.2	135.3	135.3	137.0
82.5°	14.1	18.4	27.2	30.7	64.1	80.8	86.1	88.7	93.1	93.1	93.1
85°	8.8	11.4	17.6	20.2	38.6	49.2	52.7	53.6	57.1	58.0	58.0
87.5°	4.4	6.1	11.4	12.3	20.2	25.5	25.5	27.2	27.2	26.3	25.5
90°	4.6	8.2	11.9	12.7	20.0	29.7	34.5	30.7	23.0	17.3	17.3
92.5°	18.2	49.1	80.0	87.7	123.4	170.9	194.6	170.6	122.5	86.4	83.0
95°	43.7	100.2	156.9	171.0	303.6	480.4	568.9	507.7	385.2	293.4	282.9
97.5°	75.4	125.3	175.3	187.8	408.9	703.8	851.2	812.5	735.1	677.1	657.3
100°	100.0	145.4	190.6	201.9	447.3	774.5	938.1	940.9	946.6	950.8	927.2
102.5°	120.9	163.2	205.4	216.0	464.9	796.8	962.7	1012.1	1110.7	1184.7	1164.5
105°	156.4	192.3	228.0	237.0	478.0	799.3	960.0	1070.6	1291.6	1457.5	1446.6
107.5°	192.8	226.2	259.5	267.9	480.4	763.8	905.4	1059.7	1368.0	1599.3	1601.9
110°	217.4	247.5	277.5	285.1	476.7	732.2	859.9	1032.4	1377.2	1635.7	1647.1



TEST NUMBER: P937957

CATALOG NUMBER: SQ4-FB-125U-075D-93050-1D-UNV-STD-W-4-3000K

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	241.4	270.2	298.8	306.0	476.8	704.7	818.6	995.0	1347.9	1612.6	1630.0
115°	277.8	304.3	330.9	337.4	481.3	673.0	769.0	938.9	1278.9	1533.9	1557.9
117.5°	313.8	337.9	361.9	367.9	490.3	653.4	734.9	888.2	1195.0	1425.1	1451.8
120°	334.7	357.4	380.0	385.7	497.6	646.7	721.3	861.4	1141.7	1352.0	1378.0
122.5°	355.2	378.0	400.9	406.6	508.0	643.2	710.8	837.0	1089.4	1278.7	1304.4
125°	386.5	407.4	428.2	433.4	522.1	640.3	699.4	806.6	1021.0	1181.8	1205.5
127.5°	412.0	433.0	454.0	459.3	536.1	638.6	689.8	781.9	966.0	1104.1	1124.0
130°	425.6	448.3	470.9	476.6	546.5	639.7	686.2	768.2	932.1	1055.0	1073.4
132.5°	439.8	462.4	485.1	490.7	554.8	640.3	683.1	756.4	903.2	1013.2	1029.6
135°	460.7	481.3	501.9	507.0	563.9	639.7	677.6	739.1	862.0	954.1	968.3
137.5°	482.0	502.4	522.9	527.9	577.5	643.6	676.6	728.6	832.5	910.4	922.0
140°	499.8	518.5	537.3	542.1	585.9	644.3	673.5	718.4	808.1	875.4	886.3
142.5°	513.4	530.8	548.1	552.5	592.9	646.6	673.5	712.9	791.7	850.8	860.1
145°	534.4	549.5	564.7	568.4	601.9	646.6	668.9	701.1	765.6	814.0	821.1
147.5°	555.3	570.0	584.8	588.5	615.2	651.0	668.9	694.3	745.1	783.1	789.0
150°	568.9	582.2	595.6	598.9	622.3	653.4	668.9	690.3	733.2	765.4	770.1
152.5°	583.0	593.1	603.2	605.8	626.8	654.9	668.9	687.2	723.8	751.2	754.8
155°	603.9	611.4	618.9	620.7	636.8	658.2	668.9	683.5	712.6	734.4	736.8
157.5°	619.4	626.7	633.9	635.7	646.8	661.5	668.9	680.2	702.9	719.9	721.5
160°	629.8	635.5	641.2	642.6	651.3	663.0	668.9	678.6	698.0	712.6	713.5
162.5°	640.3	644.5	648.8	649.9	656.2	664.7	668.9	677.1	693.5	705.8	706.7
165°	651.6	655.5	659.3	660.3	663.2	667.0	668.9	674.8	686.5	695.3	696.2
167.5°	662.2	663.9	665.8	666.2	668.7	671.9	673.5	677.3	685.0	690.8	691.2
170°	668.9	670.8	672.6	673.0	673.2	673.4	673.5	677.3	685.0	690.8	690.8
172.5°	672.6	673.0	673.4	673.5	673.5	673.5	673.5	676.5	682.5	687.1	686.7
175°	677.6	677.6	677.6	677.6	676.2	674.4	673.5	675.4	679.2	682.1	682.1
177.5°	677.6	677.6	677.6	677.6	676.6	675.1	674.4	675.9	678.9	681.2	680.8
180°	677.6	677.6	677.6	677.6	677.6	677.6	677.6	677.6	677.6	677.6	677.6



TEST NUMBER: P937957
CATALOG NUMBER: SQ4-FB-125U-075D-93050-1D-UNV-STD-W-4-3000K

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	273.2	273.2
2.5°	291.6	289.8
5°	375.0	376.8
7.5°	505.0	504.1
10°	628.0	635.9
12.5°	717.6	719.3
15°	772.0	775.5
17.5°	793.1	794.0
20°	794.0	792.2
22.5°	784.3	782.6
25°	772.9	772.0
27.5°	762.4	763.2
30°	758.0	760.6
32.5°	758.0	762.4
35°	759.7	764.1
37.5°	758.9	764.1
40°	755.3	761.5
42.5°	745.7	750.1
45°	730.7	736.0
47.5°	711.4	714.9
50°	686.8	690.3
52.5°	656.1	657.0
55°	619.2	622.7
57.5°	579.7	580.6
60°	535.8	538.4
62.5°	489.2	489.2
65°	440.0	441.8
67.5°	389.1	393.5
70°	337.3	338.1
72.5°	286.3	286.3
75°	233.6	234.5
77.5°	183.6	183.6
80°	136.1	137.0
82.5°	94.0	95.7
85°	58.8	58.8
87.5°	27.2	24.6
90°	17.3	17.3
92.5°	69.2	55.5
95°	241.3	199.6
97.5°	578.1	498.9
100°	832.9	738.5
102.5°	1083.6	1002.8
105°	1403.2	1359.7
107.5°	1612.5	1623.0
110°	1692.3	1737.5



TEST NUMBER: P937957

CATALOG NUMBER: SQ4-FB-125U-075D-93050-1D-UNV-STD-W-4-3000K

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	1699.4	1769.0
115°	1654.4	1750.8
117.5°	1558.8	1665.7
120°	1481.8	1585.7
122.5°	1406.8	1509.3
125°	1299.8	1394.2
127.5°	1203.6	1283.3
130°	1147.0	1220.6
132.5°	1095.5	1161.4
135°	1025.1	1081.8
137.5°	968.5	1015.0
140°	929.7	973.2
142.5°	897.5	935.0
145°	849.4	877.7
147.5°	812.3	835.8
150°	789.2	808.1
152.5°	769.1	783.5
155°	746.3	755.8
157.5°	728.2	734.9
160°	717.4	721.3
162.5°	710.4	714.0
165°	700.1	704.0
167.5°	692.8	694.4
170°	690.8	690.8
172.5°	685.3	683.9
175°	682.1	682.1
177.5°	679.2	677.6
180°	677.6	677.6



TEST NUMBER: P937957

CATALOG NUMBER: SQ4-FB-125U-075D-93050-1D-UNV-STD-W-4-3000K

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	2.36	3.11	3.45	4.20	5.70	15.50	16.24	16.59	17.34	18.83
	3H	3.06	3.73	4.15	4.83	6.34	17.31	17.98	18.41	19.08	20.60
	4H	3.35	3.99	4.46	5.09	6.61	17.94	18.58	19.05	19.68	21.20
	6H	3.60	4.18	4.71	5.28	6.82	18.36	18.94	19.47	20.04	21.58
	8H	3.66	4.22	4.78	5.34	6.86	18.47	19.02	19.59	20.14	21.67
	12H	3.67	4.20	4.80	5.32	6.87	18.52	19.05	19.65	20.17	21.72
4H	2H	9.54	10.17	10.65	11.27	12.79	15.76	16.40	16.87	17.50	19.02
	3H	11.09	11.63	12.22	12.75	14.29	17.78	18.31	18.90	19.44	20.97
	4H	11.19	11.67	12.31	12.79	14.34	18.53	19.02	19.66	20.14	21.69
	6H	11.19	11.61	12.32	12.75	14.29	19.05	19.47	20.18	20.61	22.16
	8H	11.16	11.56	12.30	12.69	14.25	19.20	19.60	20.34	20.73	22.29
	12H	11.11	11.47	12.26	12.61	14.18	19.28	19.64	20.43	20.78	22.35
8H	4H	12.61	13.00	13.74	14.13	15.70	18.58	18.97	19.71	20.11	21.67
	6H	12.85	13.17	14.00	14.34	15.90	19.19	19.52	20.35	20.69	22.25
	8H	12.86	13.15	14.02	14.30	15.88	19.40	19.69	20.56	20.84	22.42
	12H	12.83	13.08	13.99	14.23	15.84	19.53	19.78	20.70	20.93	22.55
12H	4H	12.74	13.10	13.89	14.24	15.81	18.53	18.89	19.68	20.03	21.60
	6H	13.10	13.38	14.26	14.54	16.12	19.18	19.46	20.33	20.61	22.19
	8H	13.16	13.41	14.33	14.56	16.18	19.39	19.64	20.56	20.79	22.41