

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P937967

Luminaire Tested: SQ4-FB-125U-075D-93050-1D-UNV-STD-W-8-4000K

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P937967
REPORT IS A COMBINATION OF REPORTS P933614 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-125U-075D-93050-1D-UNV-STD-W-8-4000K
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 13414.5 lumens
Efficiency: N/A
Efficacy: 120.6 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 8' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 111.2
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P937967
CATALOG NUMBER: SQ4-FB-125U-075D-93050-1D-UNV-STD-W-8-4000K

Luminous Intensity Polar Plot

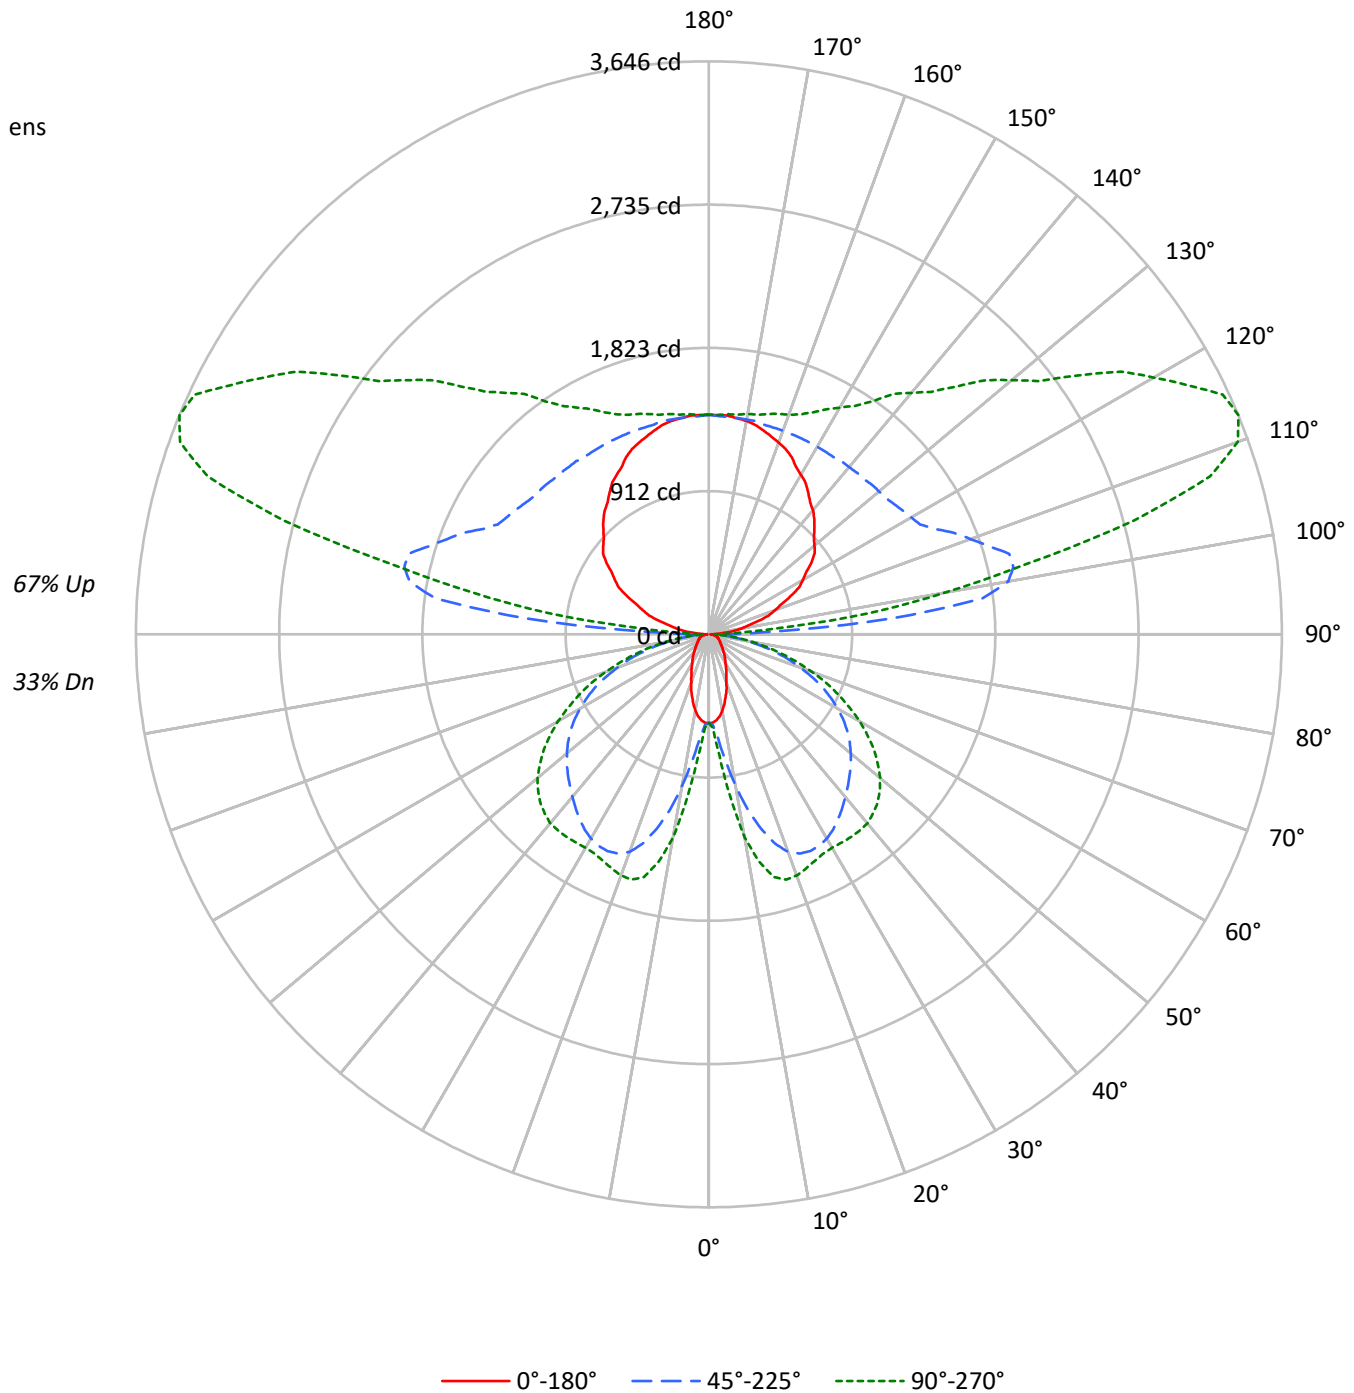



TEST NUMBER: P937967

CATALOG NUMBER: SQ4-FB-125U-075D-93050-1D-UNV-STD-W-8-4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	93	93	93	93	74	74	74	56	56	56	40	40	40	33
1	94	89	85	82	84	80	77	74	64	62	60	49	47	46	35	34	33	27
2	85	77	71	66	76	70	65	60	55	52	49	42	40	38	30	29	27	22
3	77	68	60	54	69	61	55	50	49	44	40	37	34	31	26	24	23	18
4	70	59	52	46	63	54	47	42	43	38	34	33	29	26	23	21	19	15
5	64	53	45	39	57	48	41	35	38	33	29	29	25	23	21	18	16	13
6	59	47	39	33	53	42	35	30	34	29	25	26	22	19	19	16	14	11
7	54	42	34	29	49	38	31	26	31	25	22	23	20	17	17	14	12	10
8	50	38	30	25	45	34	28	23	28	23	19	21	18	15	15	13	11	8
9	47	34	27	22	42	31	25	20	25	20	17	19	16	13	14	12	10	7
10	43	31	24	19	39	28	22	18	23	18	15	18	14	12	13	10	9	7

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2612	2612	2612
5°	2552	3019	3511
10°	2315	4401	5821
15°	1967	5750	7029
20°	1602	6663	7164
25°	1336	6973	7018
30°	1127	7017	7005
35°	996	6901	7186
40°	868	6749	7373
45°	786	6638	7402
50°	721	6538	7280
55°	691	6392	6957
60°	707	6111	6447
65°	736	5685	5747
70°	783	4957	4855
75°	868	4042	3789
80°	948	2804	2553
85°	843	1487	1307

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 7402 cd/sqm



TEST NUMBER: P937967

CATALOG NUMBER: SQ4-FB-125U-075D-93050-1D-UNV-STD-W-8-4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	72.8	0.5
10°-20°	322.8	2.4
20°-30°	564.6	4.2
30°-40°	726.8	5.4
40°-50°	811.8	6.1
50°-60°	777.6	5.8
60°-70°	616.2	4.6
70°-80°	362.3	2.7
80°-90°	106.0	0.8
90°-100°	680.8	5.1
100°-110°	1789.8	13.3
110°-120°	1855.8	13.8
120°-130°	1488.6	11.1
130°-140°	1168.0	8.7
140°-150°	896.5	6.7
150°-160°	645.6	4.8
160°-170°	395.0	2.9
170°-180°	133.5	1.0
0°-30°	960.2	7.2
0°-40°	1687.1	12.6
0°-60°	3276.5	24.4
0°-90°	4361.0	32.5
90°-120°	4326.4	32.3
90°-150°	7879.4	58.7
90°-180°	9054.0	67.5
0°-180°	13414.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	563	563	563	563	563	
5°	548	588	663	750	777	51
15°	411	758	1278	1550	1599	114
25°	262	860	1523	1590	1591	121
35°	177	822	1434	1515	1575	111
45°	121	655	1267	1452	1517	94
55°	87	416	1075	1249	1284	79
65°	69	221	798	898	911	68
75°	51	136	438	482	483	53
85°	18	42	109	120	121	19
90°	9	26	71	36	36	9
95°	90	352	1172	605	412	100
105°	322	488	1979	3004	2803	342
115°	573	695	1585	3162	3609	566
125°	797	893	1442	2436	2874	707
135°	950	1045	1397	1966	2230	735
145°	1101	1172	1379	1678	1809	690
155°	1245	1279	1379	1514	1558	572
165°	1343	1361	1379	1433	1451	379
175°	1397	1397	1388	1406	1406	133
180°	1397	1397	1397	1397	1397	



TEST NUMBER: P937967

CATALOG NUMBER: SQ4-FB-125U-075D-93050-1D-UNV-STD-W-8-4000K

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	563.0	563.0	563.0	563.0	563.0	563.0	563.0	563.0	563.0	563.0	563.0
2.5°	563.0	563.0	566.6	568.4	572.1	573.9	577.5	581.1	592.0	593.8	597.4
5°	548.5	555.8	579.3	588.4	613.7	648.1	662.6	686.1	735.0	749.5	758.5
7.5°	526.8	543.1	601.0	615.5	678.9	769.4	807.4	858.1	935.9	974.0	1004.7
10°	492.4	526.8	630.0	664.4	767.6	905.2	975.8	1046.5	1164.1	1216.6	1236.5
12.5°	454.4	510.5	660.8	707.8	856.3	1057.3	1142.4	1220.2	1354.2	1424.8	1435.7
15°	410.9	487.0	689.7	758.5	950.4	1184.0	1278.2	1374.1	1499.0	1549.7	1562.4
17.5°	372.9	468.9	716.9	789.3	1022.8	1298.1	1394.0	1473.7	1575.1	1609.5	1618.5
20°	325.9	439.9	735.0	829.1	1099.0	1381.4	1473.7	1535.2	1604.0	1625.8	1629.4
22.5°	291.5	409.1	745.9	843.6	1149.6	1432.1	1509.9	1558.8	1605.8	1613.1	1614.9
25°	262.5	374.7	744.0	859.9	1193.1	1462.8	1522.6	1558.8	1585.9	1589.6	1589.6
27.5°	235.3	336.7	736.8	863.5	1225.7	1470.1	1517.1	1542.5	1555.2	1562.4	1562.4
30°	211.8	300.5	718.7	856.3	1240.2	1462.8	1500.8	1513.5	1526.2	1537.1	1542.5
32.5°	193.7	266.1	691.5	841.8	1242.0	1444.7	1471.9	1479.1	1497.2	1522.6	1531.6
35°	177.4	231.7	660.8	821.9	1231.1	1415.8	1433.9	1441.1	1477.3	1515.3	1528.0
37.5°	161.1	206.4	620.9	787.5	1214.8	1381.4	1394.0	1406.7	1462.8	1508.1	1522.6
40°	144.8	184.7	573.9	749.5	1189.5	1339.7	1350.6	1370.5	1444.7	1497.2	1511.7
42.5°	132.2	166.5	523.2	709.6	1156.9	1292.7	1309.0	1337.9	1423.0	1479.1	1495.4
45°	121.3	148.4	468.9	655.3	1115.2	1243.8	1267.3	1307.1	1397.7	1452.0	1466.5
47.5°	110.4	135.8	412.8	599.2	1070.0	1194.9	1225.7	1270.9	1363.3	1415.8	1428.4
50°	101.4	123.1	356.6	539.5	1021.0	1142.4	1178.6	1225.7	1319.8	1368.7	1385.0
52.5°	94.1	112.2	304.1	479.7	964.9	1088.1	1129.7	1178.6	1267.3	1314.4	1325.2
55°	86.9	103.2	258.9	416.4	907.0	1030.2	1075.4	1122.5	1209.4	1249.2	1256.5
57.5°	83.3	95.9	220.9	356.6	845.4	964.9	1015.6	1059.1	1140.6	1171.4	1178.6
60°	77.8	90.5	191.9	305.9	778.4	903.4	946.8	990.2	1059.1	1084.5	1089.9
62.5°	72.4	86.9	170.2	257.1	709.6	830.9	874.4	914.2	972.1	990.2	997.5
65°	68.8	83.3	153.9	220.9	639.0	754.9	798.4	832.7	879.8	897.9	901.5
67.5°	65.2	79.7	141.2	190.1	568.4	678.9	711.5	744.0	780.2	798.4	800.2
70°	59.7	76.0	130.3	168.4	496.0	592.0	619.1	653.5	682.5	691.5	697.0
72.5°	56.1	70.6	123.1	152.1	421.8	508.7	534.0	554.0	579.3	588.4	588.4
75°	50.7	63.4	115.9	135.8	345.8	416.4	438.1	458.0	477.9	481.5	476.1
77.5°	45.3	56.1	99.6	114.1	269.7	329.5	347.6	358.4	374.7	378.4	380.2
80°	38.0	48.9	77.8	88.7	195.5	242.6	255.3	264.3	278.8	278.8	282.4
82.5°	29.0	38.0	56.1	63.4	132.2	166.5	177.4	182.8	191.9	191.9	191.9
85°	18.1	23.5	36.2	41.6	79.7	101.4	108.6	110.4	117.7	119.5	119.5
87.5°	9.1	12.7	23.5	25.3	41.6	52.5	52.5	56.1	56.1	54.3	52.5
90°	9.4	16.9	24.3	26.2	41.3	61.3	71.2	63.3	47.4	35.6	35.6
92.5°	37.5	101.2	165.0	180.9	254.4	352.2	401.2	351.6	252.4	178.0	171.0
95°	90.0	206.6	323.3	352.5	625.8	990.3	1172.5	1046.4	793.9	604.6	583.1
97.5°	155.6	258.5	361.4	387.1	843.0	1450.8	1754.7	1674.9	1515.3	1395.7	1354.8
100°	206.2	299.5	392.8	416.2	922.0	1596.4	1933.7	1939.5	1951.2	1959.9	1911.3
102.5°	249.3	336.4	423.4	445.2	958.3	1642.3	1984.3	2085.9	2289.2	2441.7	2400.0
105°	322.4	396.2	469.9	488.3	985.1	1647.5	1978.7	2206.5	2662.3	3004.0	2981.7
107.5°	397.5	466.2	534.9	552.1	990.1	1574.2	1866.2	2184.1	2819.8	3296.5	3301.9
110°	448.1	510.1	572.2	587.7	982.6	1509.2	1772.5	2127.9	2838.5	3371.5	3394.8



TEST NUMBER: P937967

CATALOG NUMBER: SQ4-FB-125U-075D-93050-1D-UNV-STD-W-8-4000K

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	497.7	556.9	616.1	630.8	982.9	1452.4	1687.1	2050.8	2778.1	3323.7	3359.5
115°	572.7	627.3	681.8	695.4	992.0	1387.3	1585.0	1935.3	2636.0	3161.5	3211.2
117.5°	646.7	696.3	745.9	758.3	1010.4	1346.6	1514.7	1830.9	2463.2	2937.5	2992.6
120°	689.8	736.5	783.1	794.8	1025.4	1332.8	1486.5	1775.5	2353.2	2786.6	2840.1
122.5°	732.0	779.1	826.1	837.9	1046.9	1325.6	1465.0	1725.1	2245.5	2635.7	2688.5
125°	796.7	839.6	882.5	893.2	1076.0	1319.7	1441.6	1662.6	2104.6	2436.1	2484.7
127.5°	849.2	892.6	935.8	946.7	1105.1	1316.3	1421.9	1611.6	1991.2	2275.8	2316.8
130°	877.3	924.0	970.6	982.3	1126.3	1318.4	1414.4	1583.3	1921.2	2174.6	2212.5
132.5°	906.3	953.0	999.7	1011.3	1143.5	1319.7	1407.8	1559.0	1861.5	2088.3	2122.2
135°	949.5	992.0	1034.5	1045.1	1162.2	1318.5	1396.6	1523.2	1776.5	1966.5	1995.7
137.5°	993.5	1035.6	1077.7	1088.2	1190.4	1326.6	1394.7	1501.8	1715.9	1876.5	1900.5
140°	1030.1	1068.8	1107.6	1117.2	1207.6	1328.0	1388.2	1480.7	1665.6	1804.3	1826.7
142.5°	1058.2	1094.1	1129.8	1138.8	1221.9	1332.8	1388.2	1469.3	1631.8	1753.7	1772.9
145°	1101.3	1132.5	1163.9	1171.6	1240.7	1332.8	1378.7	1445.2	1578.1	1677.8	1692.4
147.5°	1144.5	1174.9	1205.3	1212.9	1268.2	1341.9	1378.7	1431.1	1535.6	1614.1	1626.1
150°	1172.5	1200.1	1227.6	1234.5	1282.5	1346.7	1378.7	1422.9	1511.3	1577.5	1587.3
152.5°	1201.6	1222.4	1243.2	1248.5	1291.9	1349.8	1378.7	1416.5	1491.9	1548.5	1555.9
155°	1244.8	1260.2	1275.6	1279.4	1312.6	1356.7	1378.7	1408.8	1468.8	1513.8	1518.7
157.5°	1276.6	1291.6	1306.6	1310.3	1333.1	1363.5	1378.7	1402.1	1448.7	1483.7	1487.2
160°	1298.2	1309.9	1321.5	1324.4	1342.5	1366.7	1378.7	1398.7	1438.8	1468.7	1470.7
162.5°	1319.7	1328.4	1337.2	1339.4	1352.5	1370.0	1378.7	1395.6	1429.3	1454.7	1456.6
165°	1343.2	1351.1	1359.0	1361.0	1366.9	1374.8	1378.7	1390.9	1415.0	1433.1	1435.1
167.5°	1364.7	1368.4	1372.2	1373.1	1378.1	1384.8	1388.2	1396.0	1411.9	1423.7	1424.5
170°	1378.7	1382.5	1386.3	1387.2	1387.5	1388.0	1388.2	1396.0	1411.9	1423.7	1423.7
172.5°	1386.3	1387.1	1388.0	1388.2	1388.2	1388.2	1388.2	1394.4	1406.9	1416.3	1415.6
175°	1396.6	1396.6	1396.6	1396.6	1393.8	1390.1	1388.2	1392.1	1400.0	1406.0	1406.0
177.5°	1396.6	1396.6	1396.6	1396.6	1394.4	1391.5	1390.1	1393.1	1399.4	1404.1	1403.3
180°	1396.6	1396.6	1396.6	1396.6	1396.6	1396.6	1396.6	1396.6	1396.6	1396.6	1396.6



TEST NUMBER: P937967

CATALOG NUMBER: SQ4-FB-125U-075D-93050-1D-UNV-STD-W-8-4000K

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	563.0	563.0
2.5°	601.0	597.4
5°	773.0	776.6
7.5°	1041.0	1039.2
10°	1294.5	1310.8
12.5°	1479.1	1482.7
15°	1591.4	1598.6
17.5°	1634.8	1636.6
20°	1636.6	1633.0
22.5°	1616.7	1613.1
25°	1593.2	1591.4
27.5°	1571.5	1573.3
30°	1562.4	1567.8
32.5°	1562.4	1571.5
35°	1566.0	1575.1
37.5°	1564.2	1575.1
40°	1557.0	1569.6
42.5°	1537.1	1546.1
45°	1506.3	1517.1
47.5°	1466.5	1473.7
50°	1415.8	1423.0
52.5°	1352.4	1354.2
55°	1276.4	1283.6
57.5°	1194.9	1196.7
60°	1104.4	1109.8
62.5°	1008.3	1008.3
65°	907.0	910.6
67.5°	802.0	811.0
70°	695.2	697.0
72.5°	590.2	590.2
75°	481.5	483.4
77.5°	378.4	378.4
80°	280.6	282.4
82.5°	193.7	197.3
85°	121.3	121.3
87.5°	56.1	50.7
90°	35.6	35.6
92.5°	142.7	114.3
95°	497.3	411.5
97.5°	1191.6	1028.3
100°	1716.7	1522.2
102.5°	2233.4	2066.8
105°	2892.1	2802.6
107.5°	3323.6	3345.2
110°	3488.1	3581.5



TEST NUMBER: P937967

CATALOG NUMBER: SQ4-FB-125U-075D-93050-1D-UNV-STD-W-8-4000K

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	3502.8	3646.1
115°	3409.9	3608.6
117.5°	3213.0	3433.4
120°	3054.3	3268.4
122.5°	2899.8	3110.9
125°	2679.3	2873.8
127.5°	2481.0	2645.1
130°	2364.1	2515.7
132.5°	2258.1	2393.9
135°	2112.8	2229.9
137.5°	1996.2	2092.1
140°	1916.3	2005.8
142.5°	1850.0	1927.1
145°	1750.7	1809.0
147.5°	1674.5	1722.8
150°	1626.5	1665.6
152.5°	1585.4	1615.0
155°	1538.2	1557.8
157.5°	1500.9	1514.7
160°	1478.6	1486.5
162.5°	1464.1	1471.6
165°	1443.0	1451.0
167.5°	1427.9	1431.2
170°	1423.7	1423.7
172.5°	1412.6	1409.7
175°	1406.0	1406.0
177.5°	1399.9	1396.6
180°	1396.6	1396.6



TEST NUMBER: P937967

CATALOG NUMBER: SQ4-FB-125U-075D-93050-1D-UNV-STD-W-8-4000K

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	2.48	3.23	3.57	4.32	5.81	15.66	16.40	16.75	17.49	18.99
	3H	3.18	3.85	4.27	4.94	6.46	17.49	18.16	18.59	19.26	20.77
	4H	3.47	4.10	4.58	5.21	6.73	18.13	18.76	19.24	19.86	21.39
	6H	3.71	4.30	4.83	5.40	6.94	18.55	19.14	19.67	20.24	21.77
	8H	3.78	4.34	4.90	5.45	6.98	18.67	19.23	19.79	20.35	21.87
	12H	3.79	4.32	4.92	5.43	6.98	18.73	19.26	19.86	20.38	21.93
4H	2H	9.68	10.32	10.79	11.42	12.94	15.92	16.55	17.03	17.65	19.18
	3H	11.24	11.77	12.36	12.90	14.43	17.95	18.48	19.07	19.61	21.14
	4H	11.33	11.82	12.45	12.93	14.49	18.71	19.20	19.84	20.32	21.87
	6H	11.33	11.75	12.46	12.89	14.43	19.25	19.67	20.38	20.81	22.35
	8H	11.30	11.70	12.44	12.83	14.39	19.41	19.80	20.54	20.93	22.49
	12H	11.25	11.61	12.40	12.75	14.32	19.49	19.85	20.64	20.99	22.56
8H	4H	12.76	13.15	13.89	14.28	15.85	18.76	19.16	19.90	20.29	21.85
	6H	13.00	13.32	14.15	14.49	16.05	19.39	19.71	20.54	20.89	22.44
	8H	13.01	13.30	14.17	14.45	16.03	19.61	19.89	20.77	21.04	22.62
	12H	12.98	13.23	14.14	14.38	15.99	19.75	19.99	20.91	21.14	22.76
12H	4H	12.90	13.25	14.05	14.40	15.97	18.71	19.07	19.86	20.21	21.78
	6H	13.25	13.54	14.41	14.69	16.27	19.37	19.65	20.53	20.81	22.39
	8H	13.32	13.57	14.48	14.72	16.33	19.59	19.84	20.76	20.99	22.61